# **Parts Manual**

### **Counter Type Gas Convection Steamer**




Series: SteamCraft Model 21CGA5


1333 East 179<sup>th</sup> Street Cleveland, Ohio 44110


Phone: (216) 481-4900 1-800-338-2204 Fax: (216) 481-3782

www.clevelandrange.com




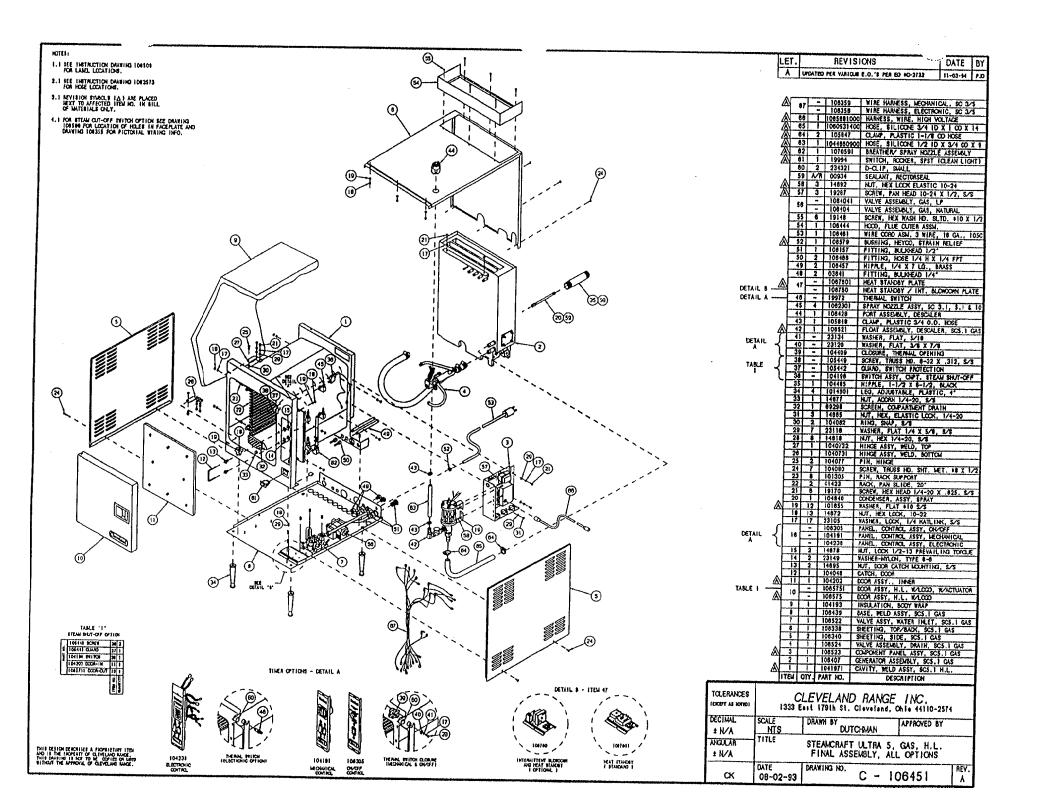


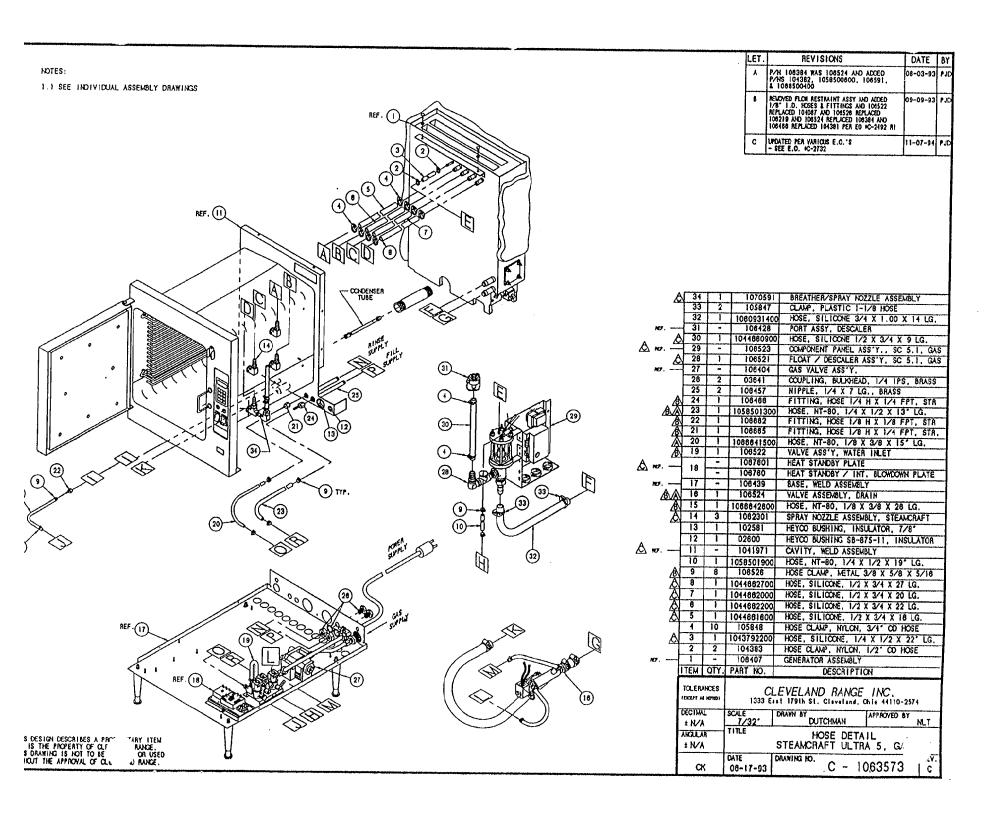

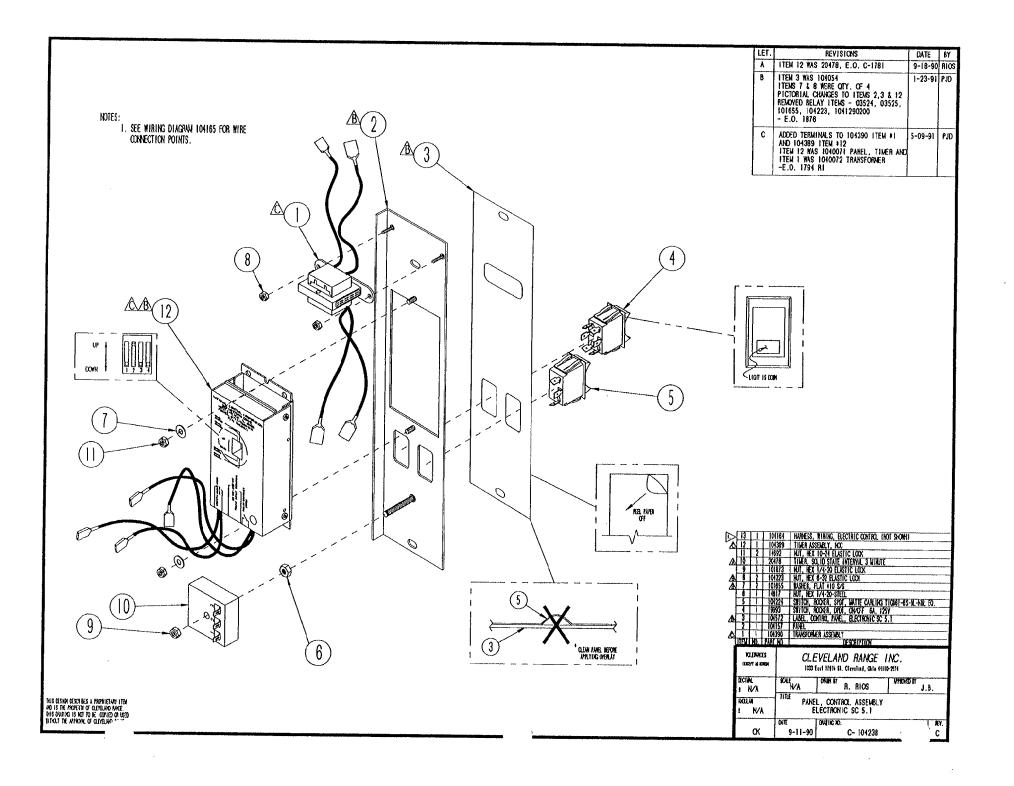


| LET. | REVISIONS  |          | βY   |
|------|--|----------|------|
| ٨    | REMOYED ITEMS 5, 8, 8 & 9 REVISED ITEM I PICTORIAL E.O. 1876 RI - COST REDUCTION | 7-00.31  | P.D. |
| В    | SEE E.O. • C-1957 R I  | 07-31-91 | P.D. |

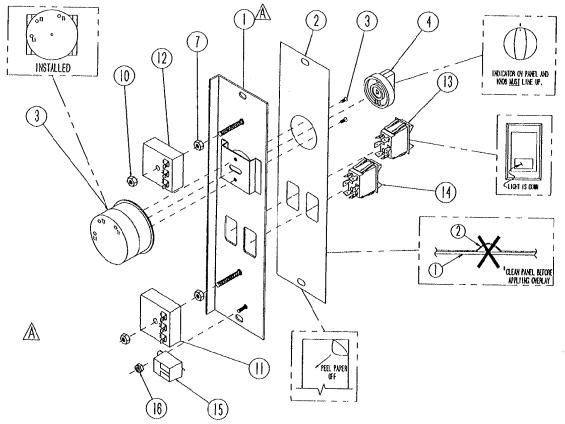





|        | 16              |                    | 14672           | \$10-3? LOCKING HEX NUT                   |     |
|--------|-----------------|--------------------|-----------------|---|-----|
|        | _15_            |                    | 41350           | BUZZER                                    |     |
| •      |                 |                    | 104224          | MANUAL SWITCH                             | -   |
|        | 13              |                    | 19993           | POKER SWITCH                              |     |
|        | 12              |                    | 20478           | 3-MINUTE TIMER                            | -   |
|        |                 |                    | 20477           | 3-SECOND TIMER                            |     |
|        | 10              | 2                  | 101873          | NUT. 1/4-20 ELASTIC LOCK                  |     |
| Ą      | 1 9             |                    |                 |   |     |
| Δ      | 8               | <u> </u>           |                 |   |     |
|        | 1-4-            | 2                  | 14817           | BLACK OXIDE 1/4-20 HEX HJT                | ~   |
| A<br>A | 5               | ļ                  |                 |   |     |
| Ą      | <del>} ?</del>  | <del></del>        | 11002           | TILENIAMA                                 |     |
| Æ      | 1 3             |                    | 11307           | TIMER KNOS                                |     |
|        | 13              |                    | 20476<br>103722 | TIMER WITH NOUNTING SCREWS (2)            |     |
|        |                 | <del></del>        | 103722          | LABEL, CONTROL PANEL, MANUAL              |     |
|        |                 | <u> </u>           |                 | CONTACL PANEL WITH STUDS                  |     |
|        | NO.             | QTY.               | PART NO.        | DESCRIPTION                               |     |
|        |                 | AAVOSS<br>AG IOTEX |                 | EVELAND RANGE INC.                        |     |
|        | DECIMAL<br>1 NV |                    | NONE NONE       | R. RIOS ANOMOLIY J.                       | В.  |
|        | ANU.AN<br>1     | N/A                | MAN             | TROL PANEL ASSEMBLY<br>JAL STEAMCRAFT 5.1 |     |
| - 1    |                 |                    | CATE            | O'AH'S 10.                                | EY. |
|        |                 | CK                 | 7-9-90          | C~ 101191                                 | В   |


THIS CESTON CESCHIES A PROPIETANT ITEM AND IS THE PROPERTY OF CLEME AND MAKE. This chaird is not to be copied on used binout the approval of clemean ance.

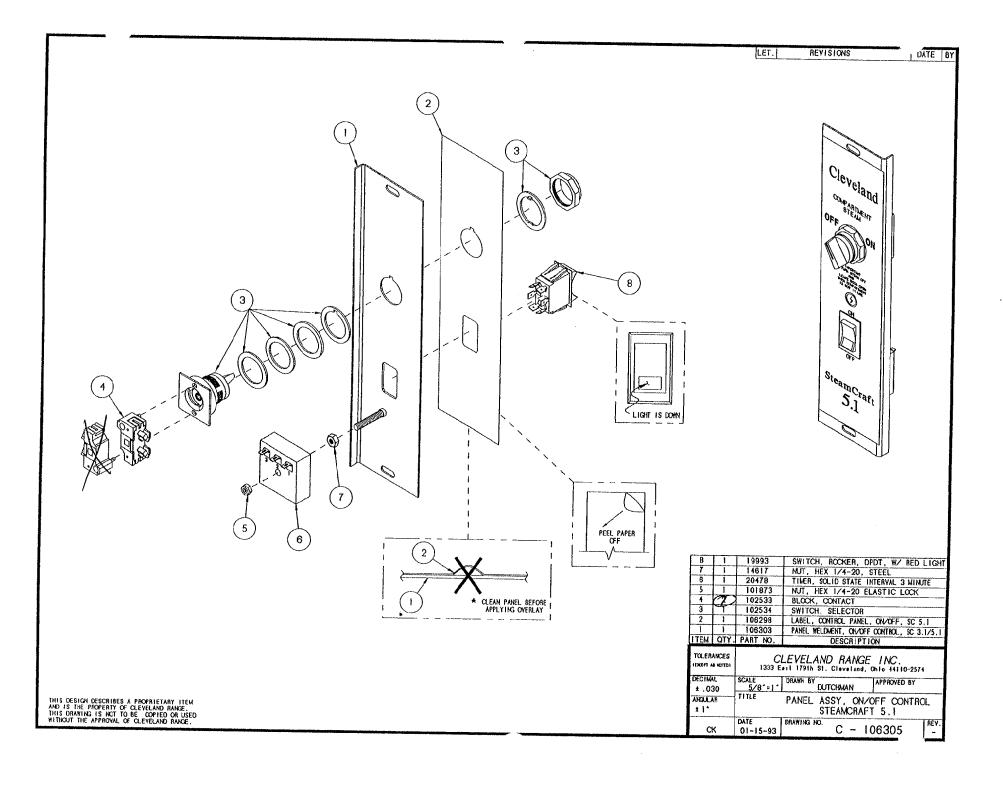

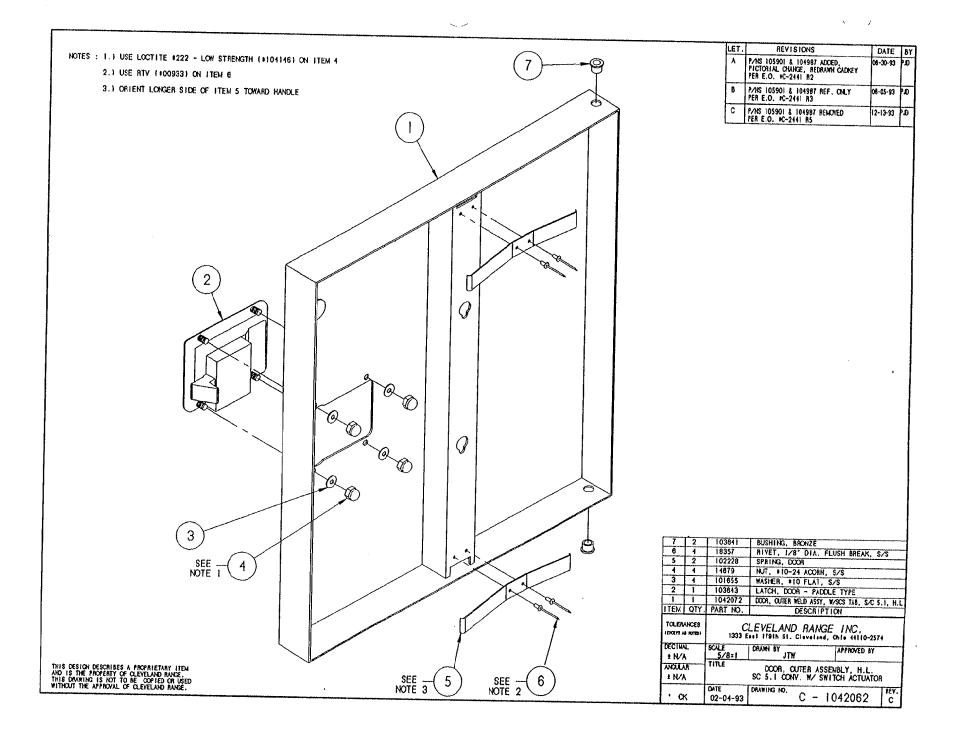

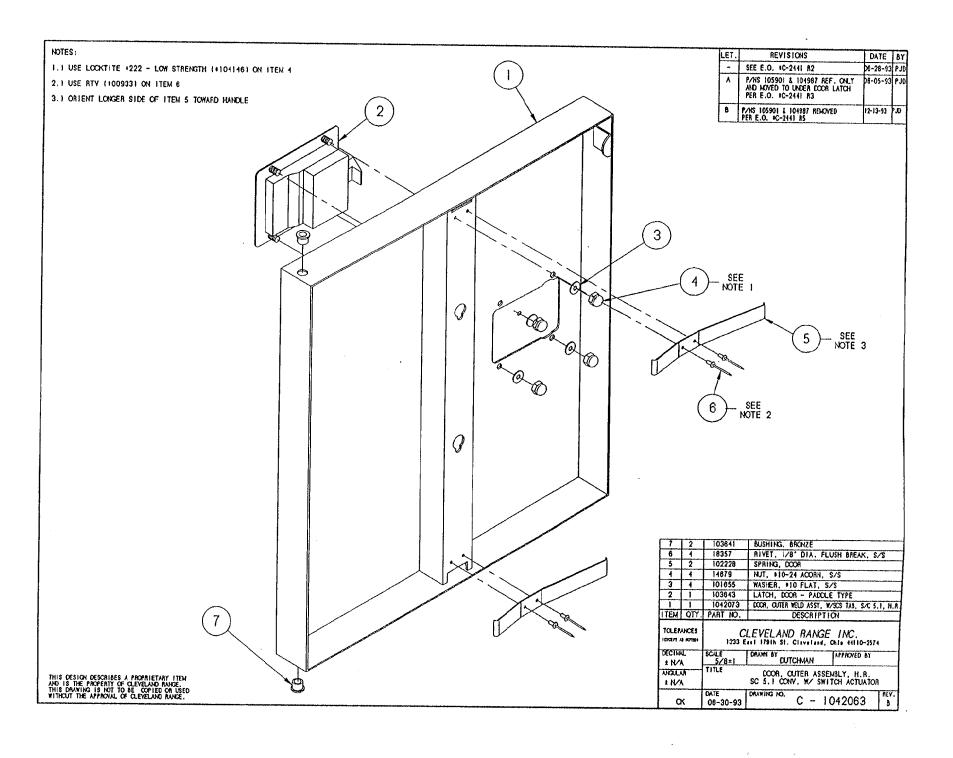

| <br> |                                      |         |       |
|------|--------------------------------------|---------|-------|
| LET. | REVISIONS                            | DATE    | BY    |
| A    | ADDED ITEMS 1 & 8, ITEM 2 WAS 104205 | 6/25/91 | JPB . |

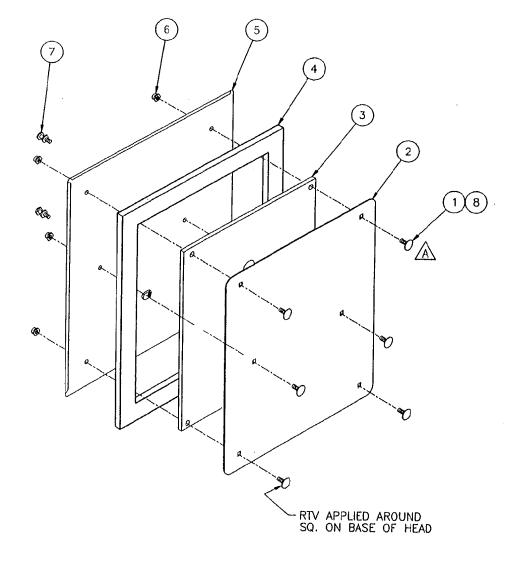




|   | 8                               | A/R     | 00932      | SEALANT, CLEAR RIV                      |                        |             |
|---|---------------------------------|---------|------------|---|------------------------|-------------|
|   | 7                               | 2       | 66508      | STUD, DOOR MOUNTING, INNER              |                        |             |
|   | 6                               | 6       | 14665      | NUT, HEX LOCK, 1/4-20 S/S               | *****                  | <del></del> |
|   | 5                               | 1       | 104204     | DOOR WELDMENT, INNER, S/C 5             | 5.1                    | *******     |
|   | 4                               | 1       | 104026     | CASKET, DOOR S/C 5.1                    |                        |             |
|   | 3                               | 1       | 104022     | PLATE, INNER GASKET RETAINER,           | S/C 5.1                |             |
|   | 2                               | 1       | 104021     | PLATE, CASKET RETAINER, S/C             |                        | ·           |
|   | 1                               | 6       | 104719     | BOLT, CARRIAGE 1/4-20 X 1.00            |                        |             |
|   | ITEN                            | QTY     | PART NO.   | DESCRIPTION                             |                        |             |
|   | TOLERANCES<br>(EXCEPT AS HOTED) |         | C          | LEVELAND RANGE                          | E INC.                 | ····        |
| i | (6.06)                          | s with) | 1          | 1333 Cost 179th St. Cleveland, Ohio 441 | 10-2574                |             |
|   | DECIMAL +                       | . WILD) | SCALE NONE | DOMESTIC OF                             | 10-2574<br>APPROVED BY |             |
|   | DECIMAL                         |         | conc       | DOMESTIC OF                             |                        |             |


THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE

#### NOTE:

- 1) SEE DRAWING 1063573 FOR HOSE LOCATIONS.
- 2) ITEMS MARKED 'REF' ARE INCLUDED IN THIS BILL OF MATERIALS FOR REFERENCE ONLY.
  THE 'ASSEMBLED UNIT' DRAWING DEPICTS THE ACTUAL REQUIRED PARTS FOR THIS ASSEMBLY.

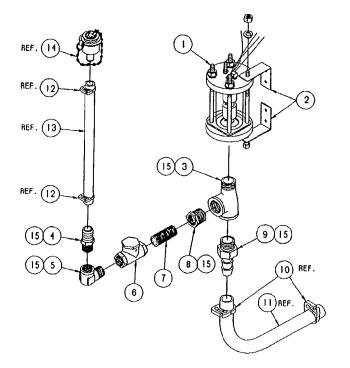

ASSEMBLED UNIT



TO GENERATOR

| 15   |           |       |          |            |   |  |  |
|--|-----------|-------|----------|------------|---|--|--|
| 13   | _         | 15    | A/R      | 00934      | SEALANT, RECTORSEAL                     |  |  |
| 12   | - (       |       | 1 1      |            |   |  |  |
| 11   | - }       |       | 1 1      | 1058450900 | HOSE, NORPRENE, 1/2 ID X 3/4 OD X 9° LG |  |  |
| 11   | $\prec$ . |       | <u> </u> | 105848     | CLAMP, PLASTIC, 3/4" OD HOSE            |  |  |
| 9   1 06240   FITTING, 3/4 H X 3/4 MPT  8   1 02565   REDUCER, 3/4 X 1/2, BRASS  7   1 14324   NIPPLE, CLOSE 1/2", BRASS  6   1 106158   CHCK VALVE, 1/2' SMING W/ RUBBER SEAT  5   1 05253   CHECK VALVE, 1/2' SMING W/ RUBBER SEAT  4   1 06237   FITTING, 1/2 H X 1/2 MPT, BRASS  3   1 20249   TEE, 3/4" MALE RUN, BRASS  3   1 20249   TEE, 3/4" MALE RUN, BRASS  4   1 105877   FLOAT, ASSEMBLY, STEAMCRAFT  ITEM QTY, PART NO. DESCRIPTION  TOLERANCES (EXCEPT AS NOTED)  1   1333   East 179th St. Cleveland, Ohio 44110-2574  DECIMAL   | A         |       | 1        | 1060931400 |   |  |  |
| 8  | Ĺ         |       | 2        |            | CLAMP, PLASTIC, 1-1/8" HOSE             |  |  |
| 7   14324 NIPPLE, CLOSE 1/2', BRASS   6   1 106158 CHECK VALVE, 1/2' SHING W/ RUBBER SEAT   5   1 05253 ELBOW, STREET, 90' X 1/2, BRASS   4   1 06237 FITTING, 1/2 H X 1/2 MPT, BRASS   3   1 20249 TEE, 3/4' MALE RUN, BRASS   2   2 106678 BRACKET, TOP/BOT, FLOAT SUPPORT   1   1 105877 FLOAT, ASSEMBLY, STEAMCRAFT   ITEM OTY. PART NO. DESCRIPTION   TOLERANCES   LEXCEPT AS HOTED   1333 East 179th St. Cleveland, Ohlo 44110-2574   DECIMAL  |           |       | 1        | 06240      | FITTING, 3/4 H X 3/4 MPT                |  |  |
| 8  | İ         | 8     | 1        | 02565      | REDUCER, 3/4 X 1/2, BRASS               |  |  |
| 1  |           | 7     |          | 14324      | NIPPLE, CLOSE 1/2", BRASS               |  |  |
| 5  |           |       | 1        | 106158     |   |  |  |
| 1  |           | 5     |          | 05253      |   |  |  |
| 3  |           | 4     | 1        | 06237      |   |  |  |
| 2 2 106878 BRACKET, TOP/BOT. FLOAT SUPPORT  I 1 105877 FLOAT, ASSEMBLY. STEAMCRAFT  ITEM QTY. PART NO. DESCRIPTION  TOLERANCES (EXCEPT AS NOTED)  DECIMAL  ± .030  ANGULAR  ± 1*  DRAWN BY DUTCHMAN  TITLE FLOAT AND DESCALER ASSEMBLY STEAMCRAFT 5.1, GAS  DRAWING NO. REV.   |           | 3     | 1        | 20249      | TEE, 3/4" MALE RUN, BRASS               |  |  |
| TOLERANCES   CLEVELAND RANGE INC.  | Α         | 2     | 2        | 106676     |   |  |  |
| TOLERANCES (EXCEPT AS HOTED)  TOLERANCES (EXCEPT AS HOTED)  DECIMAL  ± .030  ANGULAR  ± 1°  DATE  DESCRIPTION  CLEVELAND RANGE INC.  DESCRIPTION  ANGULAR  APPROVED BY DUTCHMAN  APPROVED BY DESCRIPTION  APPROV |           | 1     | 1        | 105877     |   |  |  |
| TOLERANCES (EXCEPT AS NOTED)  1333 East 179th St. Cleveland, Ohio 44110-2574  DECIMAL  ± .030  ANGULAR  ± 1°  DATE  CLEVELAND RANGE INC.  DRAWN BY DUTCHMAN  APPROVED BY  DUTCHMAN  APPROVED BY  STEAMCRAFT 5.1. GAS  DATE  DRAWING NO.  REV.  | [         | ITEM  | QTY.     | PART NO.   |   |  |  |
| ± .030 1/4" DUTCHMAN APPROVED BY  TITLE FLOAT AND DESCALER ASSEMBLY STEAMCRAFT 5.1, GAS  DATE DRAWING NO. REV.   |           |       |          |            |   |  |  |
| ± .030  ANGULAR ± 1°  DATE  DUTCHMAN  TITLE FLOAT AND DESCALER ASSEMBLY STEAMCRAFT 5.1, GAS  DATE DRAWING NO.   REV.   |           | DECIM | L        | SCALE      | DRAWN BY APPROVED BY                    |  |  |
| ANGULAR TITLE FLOAT AND DESCALER ASSEMBLY STEAMCRAFT 5.1, GAS  DATE DRAWING NO.   REV.   | į         | ± .0  | 30 l     | 1/4* .     |   |  |  |
| ± 1° STEAMCRAFT 5.1, GAS  DATE DRAWING NO. REV.  | ł         |       |          | TITLE      |   |  |  |
| incv.  | ĺ         | ± 1.  |          |            | STEAMCRAFT 5.1. GAS                     |  |  |
| CK   05-12-93   B - 106521   A   |           |       |          | DATE       |   |  |  |
|  |           | C     | K į      | 05-12-93   | B - 106521 A                            |  |  |

LET.

REVISIONS


SEE E.O. IC-2631


DATE BY

08-02-94 PJD

THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE.

SEE NOTE 2



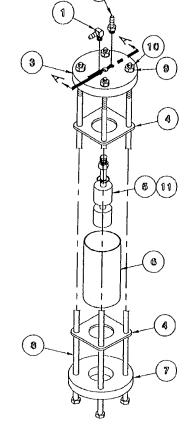

EXPLODED ASSEMBLY SCALE: 1/4=1

THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE.


ASSEMBLED VIEW SCALE: 1/4=1

ELECTRICAL -WIRE


> REFERENCE: 260AHM 5 OF 5


| LET. | REVISIONS  | DATE     | BY |
|------|--|----------|----|
| Α    | CORRECTED P/N 105787   | 7-30-92  | SM |
| В    | ROTATED 90° P/NS 105787<br>& 104380 PER EO *C-2304                                       | 10-10-92 | PD |
| С    | THIS ASSEMBLY REPLACES P/N 104091 ON SC 3.1, 5.1 ELECT. & SC 10 ELECT. PER EO *C-2277 R3 | 02-02-93 | PD |


|   | <del></del> |      | 00934   | SEALANT, RECTORSEAL                      |  |  |
|---|-------------|------|---|--|--|--|
|   | 10          | 4    | 14618   | NUT, HEX HEAD, 1/4-20, S/S               |  |  |
|   | 9           | 4    | 23105   | WASHER, SPLIT LOCK, 1/4, S/S             |  |  |
|   | В           | 4    | 104276  | SCREW, HEX HEAD, 1/4-20 x 5.5, S/S       |  |  |
|   | 7           | 1    | 104040  | CAP, FLOAT BOTTOM                        |  |  |
|   | 6           | 1    | 1040190388  | TUBE, POLYSULFONE, 2 x .125 x 3.875      |  |  |
|   | 5           | 1    | 103726  | SWITCH ASSEMBLY, FLOAT                   |  |  |
|   | 4           | 2    | 104041  | GASKET, FLOAT ASSEMBLY                   |  |  |
|   | 3           | 1    | 104039  | TOP, FLOAT, STEAMCRAFT                   |  |  |
|   | 2           | 1    | 104380  | FITTING, HOSE BARB, 1/4 H x 1/8 MPT      |  |  |
| ◬ | 1           | 1    | 105787  | FITTING, HOSE BARB, 90°, 1/4 H x 1/8 MPT |  |  |
| j | ITEM        | QTY. | PART NO.  | DESCRIPTION                              |  |  |
|   | TOLERANCES  |      | CLEVELAND RANGE INC. 1333 East 179th St. Cleveland, Ohio 44110-2574 |  |  |  |
| 1 | DECIM       | \L   | SCALE   | DRAWN BY APPROVED BY                     |  |  |
| 1 | ± №         | Ά    | AS SHOWN S. MILEWSKI  |  |  |  |
| ı | ANGULA      | \R   | FLOAT ASSEMBLY, STEAMCRAFT  |  |  |  |
| ı | ± N⁄        | Ά    | △ 10  | ELECTRIC, 3.1 AND 5.1                    |  |  |
|   |             | , ]  |   | DRAWING NO. REV.                         |  |  |
|   | CI          | `    | 05-28-92  | B - 105877 C                             |  |  |

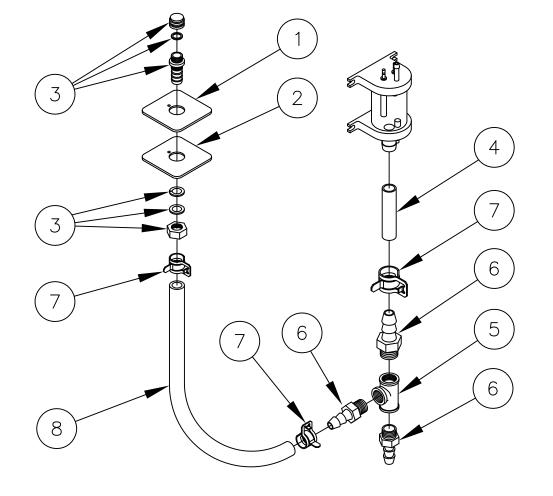

|   | 8 | 1 | 085112700 | HOSE, WHITE, EPDM, 3/4 ID X 27.000 LG    |
|---|---|---|-----------|--|
| - | 7 | 2 | 107312    | CLAMP, HOSE METAL TENSION, 1.125 OD HOSE |
|   | 6 | 2 | 06240     | FITTING, HOSE BARB, 3/4 X 3/4            |
| , | 5 | 1 | 20206     | TEE, 3/4 BRASS                           |
| 4 | 4 | 1 | 085110600 | HOSE, WHITE, EPDM, 3/4 ID X 6.000        |
|   | 3 | 1 | 109641    | PORT ASSEMBLY, DESCALER                  |
|   | 2 | 1 | 108724    | PLATE, DESCALER PORT CVRSN               |
|   | 1 | 1 | 108723    | GASKET, DESCALER PORT CVRSN              |



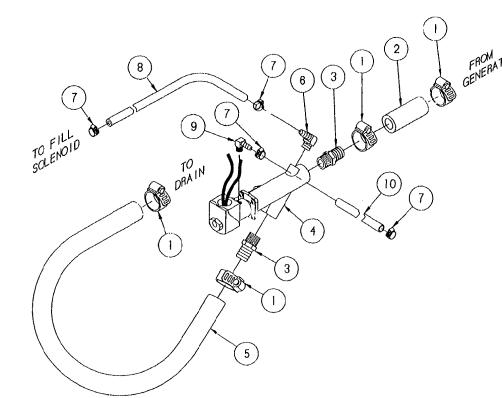


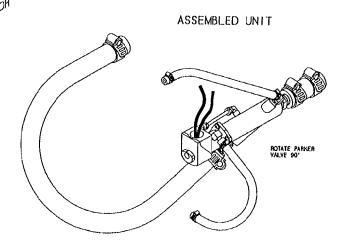



| TEM | QTY.     | PART NO.   | DESCRIPTION                        |
|-----|----------|------------|------------------------------------|
| 1   | 4        | 03207      | CLAMP, METAL, WORM DRIVE           |
| 2   |          | 085050300  | HOSE, DARIPREEN 3/4" ID X 3" LG.   |
| 3   | 2        | 06240      | FITTING, HOSE 3/4 H X 3/4 NPT, STE |
| 4   | 1        | 22244      | VALVE, DRAIN, PARKER               |
| 5   |          | 085051400  | HOSE, DARIPREEN 3/4" ID X 14" LG.  |
| 6   | 1        | 105786     | FITTING, HOSE 1/4 H X 1/4 MPT, 90  |
| 7   | 4        | 1.4.219    | CLAMP, METAL, WORM DRIVE           |
| 8   | <u> </u> | 1058500900 | HOSE, NT-80, 1/4 X 1/2 X 9' LG.    |
| 9   |          | 105787     | FITTING, HOSE 1/4 H X 1/8 MPT, 90  |
| 10  | !        | 1058500600 | HOSE, NT-80, 1/4 X 1/2 X 6' LG.    |


|                  |                      | OLOOHII I                               | 1011        |
|------------------|----------------------|---|-------------|
| TOLERANCES       | CLEVELAND RANGE INC. |   |             |
| DECIMAL<br>± N/A | SCALE<br>3/8=1       | DRAWN BY DUTCHMAN                       | APPROVED BY |
| ANGULAR<br>± N/A | TITLE                | VALVE ASSEMBLY, DE<br>STEAMCRAFT 5.1, G | iain<br>Vas |
| СК               | DATE<br>05-12-93     | DRAWING NO. C -                         | 106524 AEV  |


THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DANNING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE.

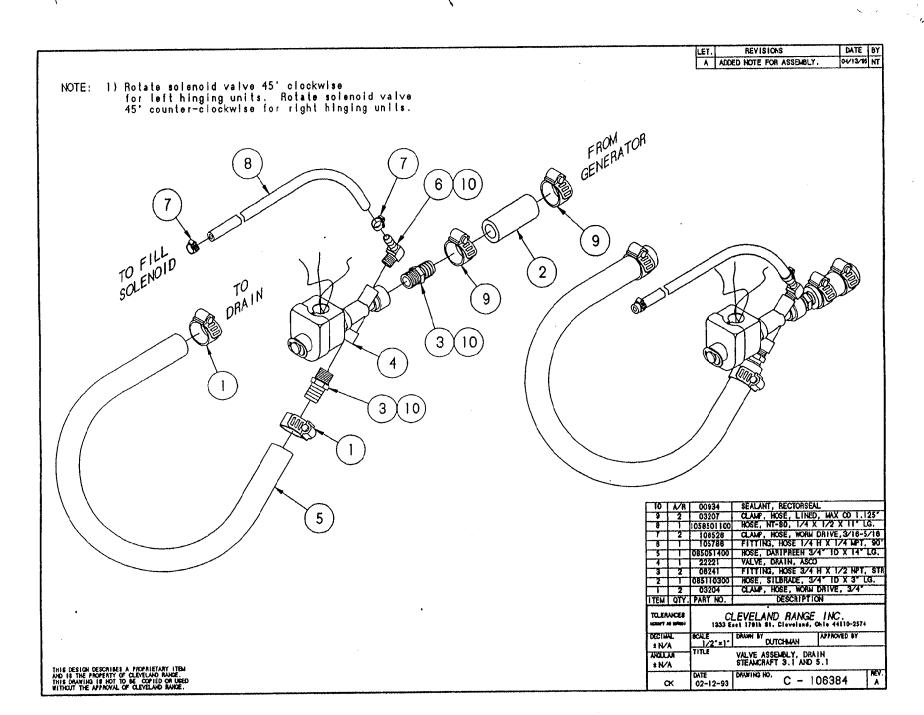


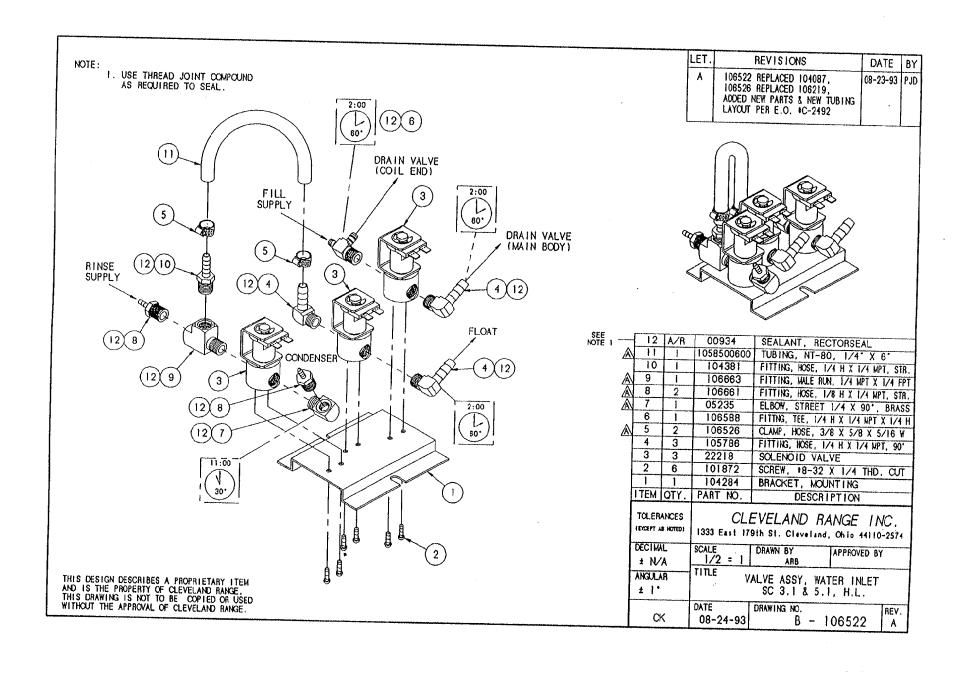


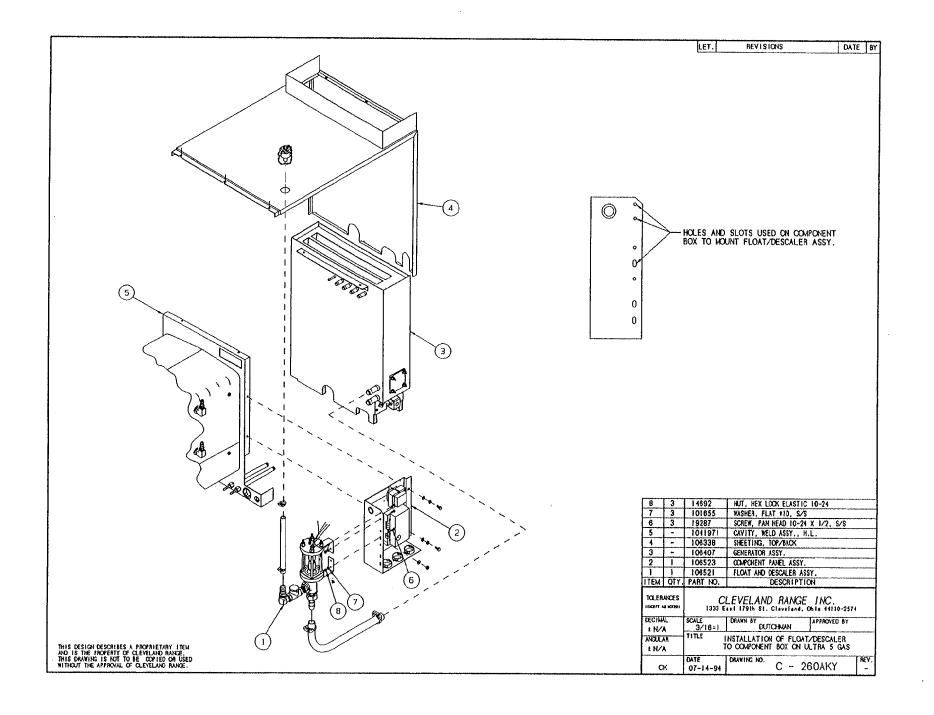

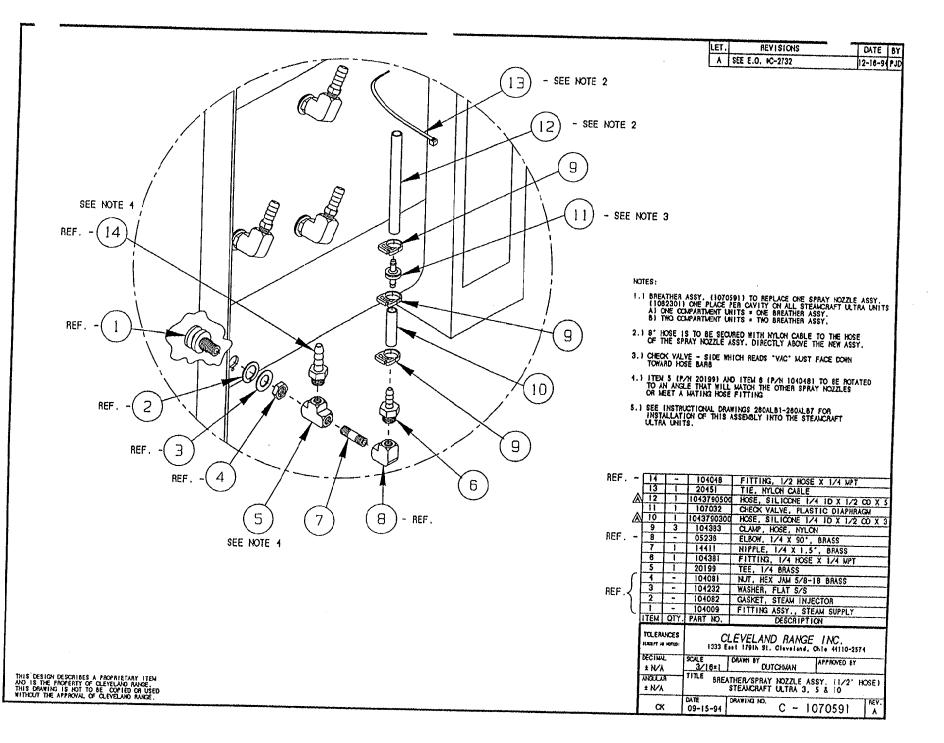


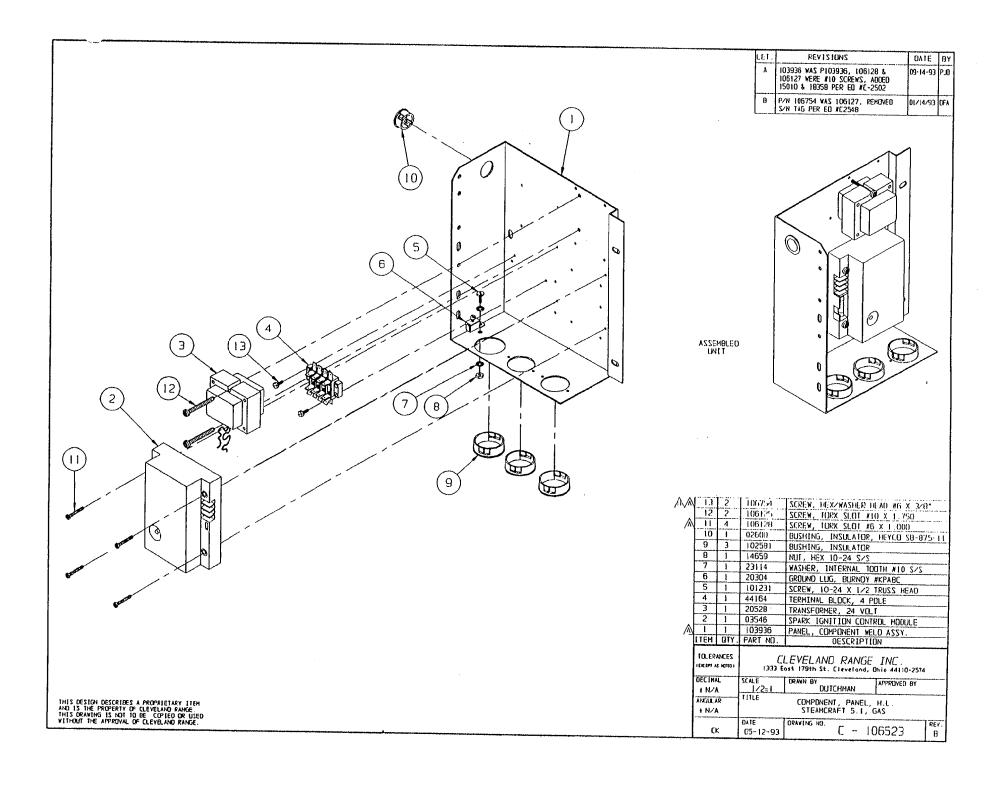


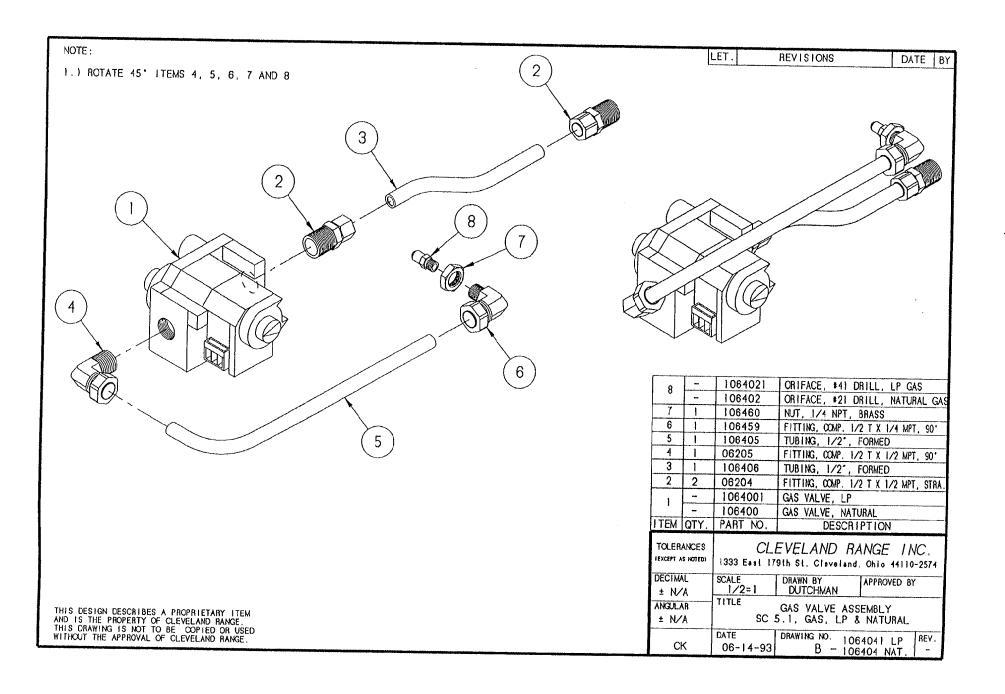


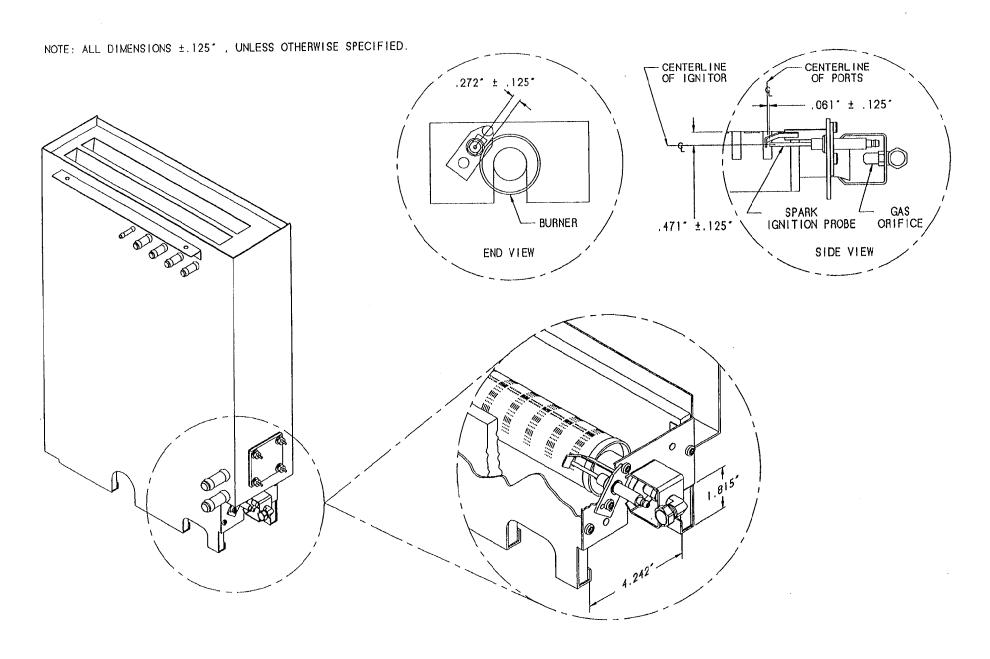

CLEVELAND RANGE INC. STEAMCRAFT 5.1 GAS SPARK IGNITION PROBE LOCATION, DWG. 106407G

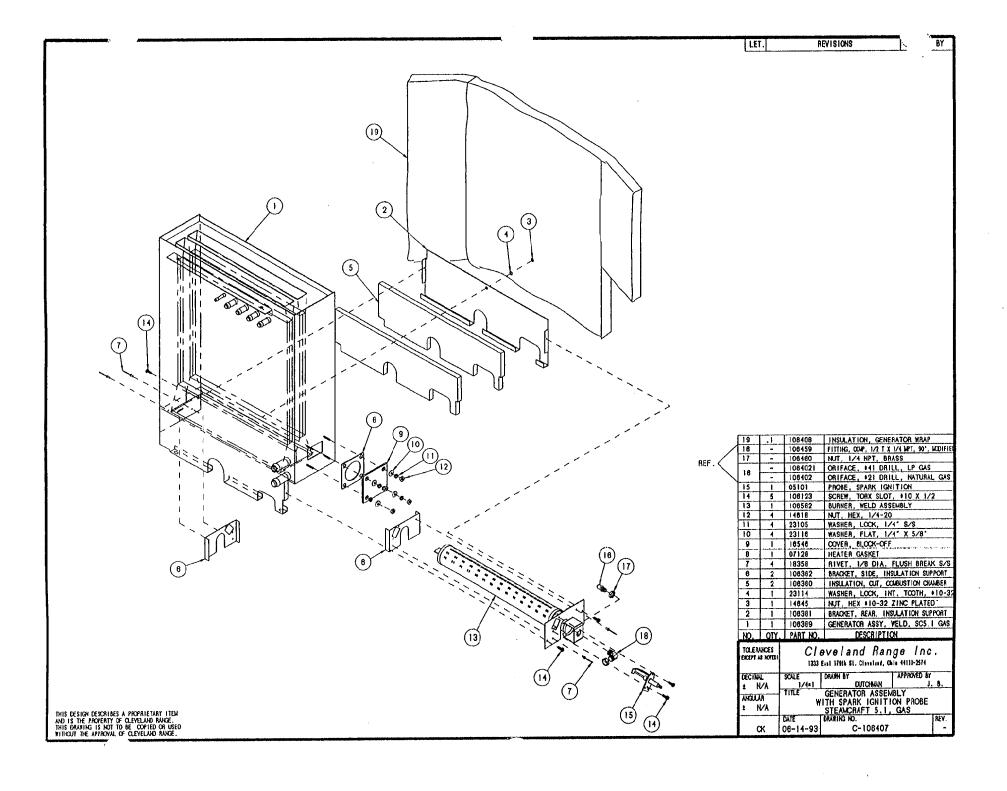


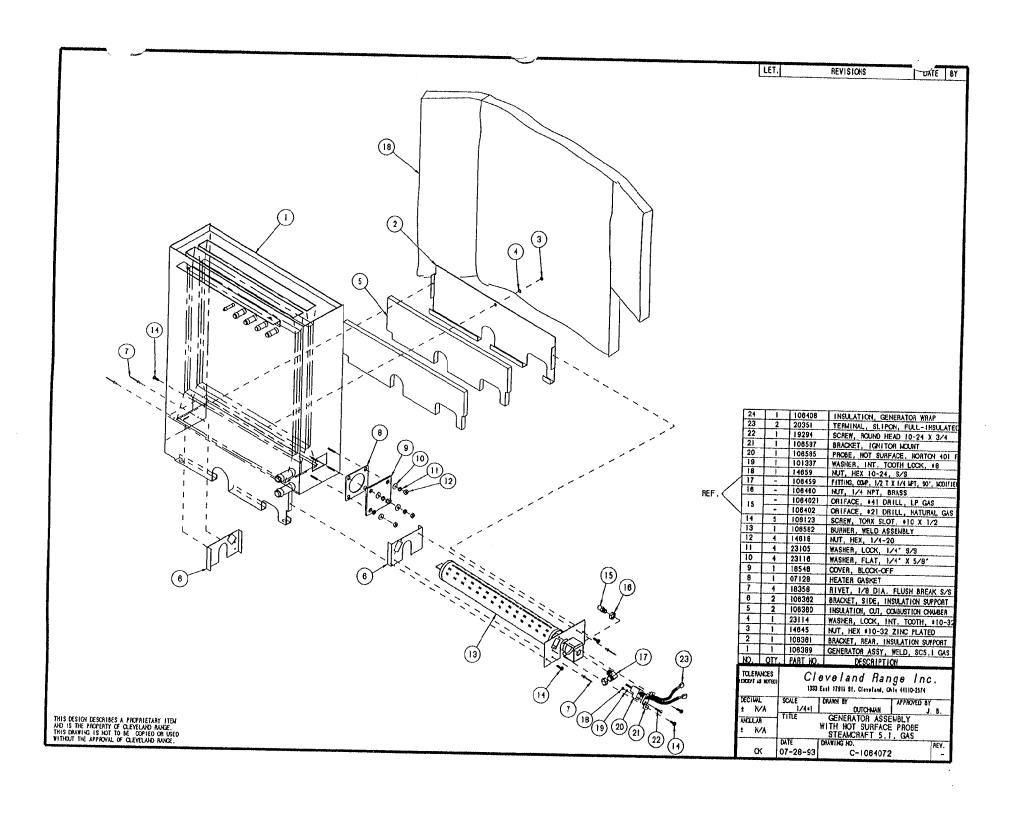

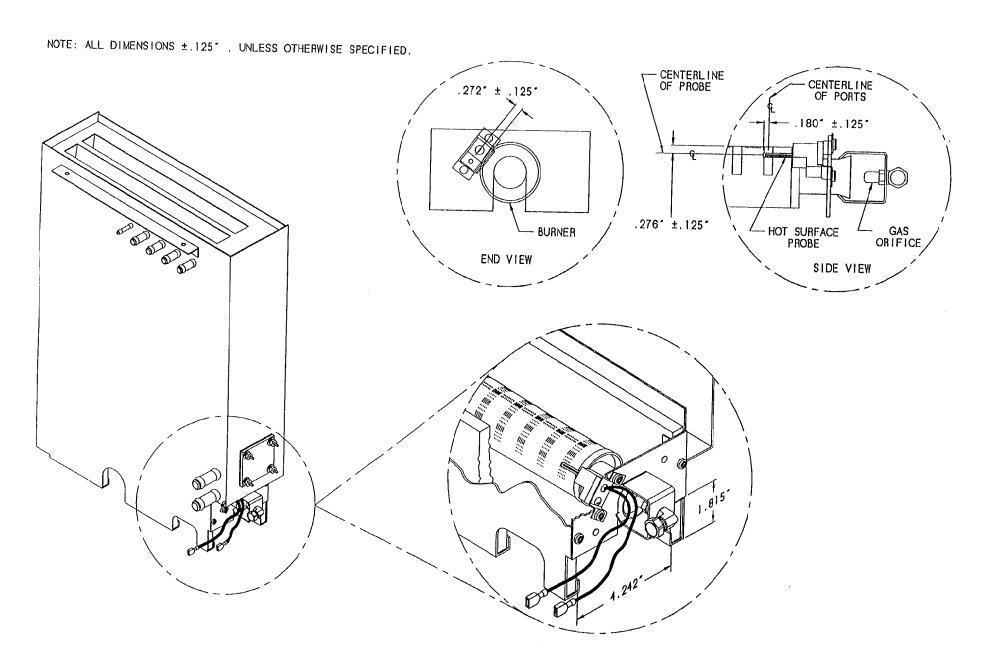

CLEVELAND RANGE INC. STEAMCRAFT 5.1 GAS HOT SURFACE PROBE LC ATION, DWG. 106407G1

| LET. | REVISIONS | JATE | BY |   |
|------|-----------|------|----|---|
|      |           |      | 1  | ь |

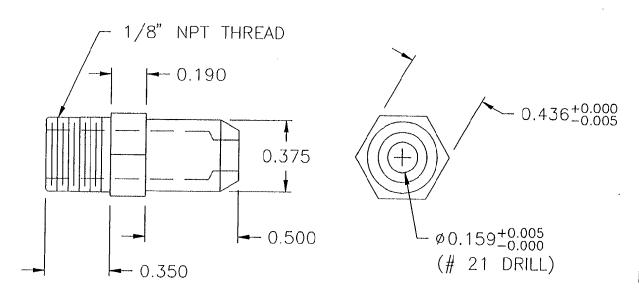


MATERIAL: BRASS

|                              |     | 1         |   |             |          |  |  |
|------------------------------|-----|-----------|---|-------------|----------|--|--|
| ITEM                         | QTY | PART NO.  | DESCRIPTION   | <b>!</b>    |          |  |  |
| TOLERANCES (EXCEPT AS NOTED) |     |           | CLEVELAND RANGE INC. 1333 East 179th St. Cleveland, Ohio 44110-2574 |             |          |  |  |
| DECIMAL ±.0.                 | 30  | scale 2=1 | DRAWN BY JPB  | APPROVED BY |          |  |  |
| ANGULAR ± 1°                 |     | TITLE     | RIFICE, GAS, # 21 DF<br>NATURAL GAS, S/C 5                          | RILL<br>.1  |          |  |  |
| A                            | С   | 3/23/93   | DRAWING NO. A- 106402   |             | REV<br>— |  |  |

THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE

| The state of the s |           | ~·  |    | ٠. |
|--|-----------|-----|----|----|
| LET.   | REVISIONS | ATE | BY |    |
|  |           |     |    | 1  |

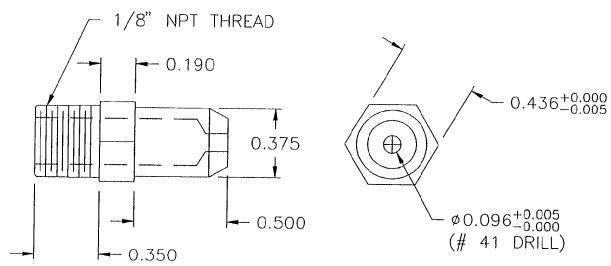



\* MATERIAL: BRASS


| ITEM                            | QTY | PART NO.  | DESCRIPTION                             |             |         |  |
|---------------------------------|-----|---|---|-------------|---------|--|
| TOLERANCES (EXCEPT AS NOTED)    |     | CLEVELAND RANGE INC. 1333 East 179th St. Cleveland, Ohio 44110-2574 |   |             |         |  |
| DECIMAL ±.030  ANGULAR ± 1°  AC |     | SCALE 2=1 DRAWN BY JPB APPROVED                                     |   | APPROVED BY |         |  |
|                                 |     | TITLE OF  | RIFICE, GAS, # 41 DF<br>LP GAS, S/C 5.1 | RILL        |         |  |
|                                 |     | date<br>3/23/93   | DRAWING NO. A- 1064021                  |             | REV<br> |  |


THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DRAW! ^ NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE


| LET. | REVISIONS   | DATE     | BY  |
|------|---|----------|-----|
| A    | ADDED CONFIGURATION FOR CLEAN<br>LIGHT PER E.O. #C-2812 | 09-15-94 | PJD |




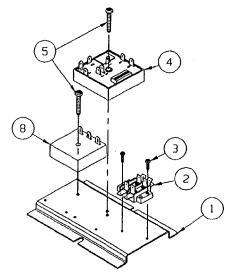












1067601 HEAT STANDBY ( STANDARD )

| $\triangle$ | 13   | -                       | 1                       | 105955                   | BRACKET, DUAL TIMER MOUNTING  |
|-------------|------|-------------------------|-------------------------|--------------------------|---|
| $\triangle$ | 12   | -                       | 1                       | 108123                   | SCREW, TORX/SLOT #10-32 X .500" LG.   |
| $\triangle$ | - 11 | -                       | 1                       | 14618                    | NUT, HEX 1/4-20, FULL FINISH  |
| $\triangle$ | 10   | -                       | 1                       | 106541                   | TIMER, I MIN. ON 0.8 SEC. OFF   |
| $\triangle$ | 9    |                         | 2                       | 23116                    | WASHER, FLAT 1/4-20 S/S   |
| $\triangle$ | 8    | 1                       | 1                       | 106580                   | TIMER, 20 SEC ON, 6 MIN. OFF  |
| $\triangle$ | 7    | -                       | 1                       | 106118                   | BOLT, 1/4-20 X 2-1/4, ZINC PLATED   |
|             | 8    | -                       | 1                       | 105966                   | RELAY, 120 V, DPDT  |
|             | 5    | 2                       | 1                       | 106124                   | SCREW, TORX/SLOT \$10-32 X 1.00" LG.  |
| A           | 4    | 1                       | 1                       | 106911                   | TIMER, CLEAN LIGHT (DIP SWITCHES)   |
|             | 3    | 2                       | 4                       | 106127                   | SCREW, TORX/SLOT #6-32 X .500' LG.  |
|             | 2    | 1                       | 1                       | 44168                    | TERMINAL, BLOCK ASM, 2 POLE   |
|             | 1    | 1                       | T                       | 106306                   | BRACKET, OPTION PLATE   |
| ı           | ITEM |                         | QTY.                    | PART NO.                 | DESCRIPTION   |
|             |      | 1067601<br>HEAT STANDBY | 106760<br>INT. BLOWDOWN | ± N/A<br>ANXLAR<br>± N/A | CLEVELAND RANGE INC.  1333 East 1791h St. Claveland, Onle 44110-2374  CALE DAWN BY D. ATHERTON APPROVED BY  17LE HEAT STANDBY PLATE WITH  INTERMITTENT BLONCOWN OPTION  STEAMCRAFT ULTRA 5 GAS  ATE DEWING NO. REV. |
|             |      |                         |                         |                          | 1/21/94 C - 106760/1067601 A  |


THIS DESIGN DESCRIBES A PROPRIETARY LITEM AND 13 THE PROPERTY OF CLEVELAND RANGE. THIS DRAWING IS NOT TO BE ODJED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE.

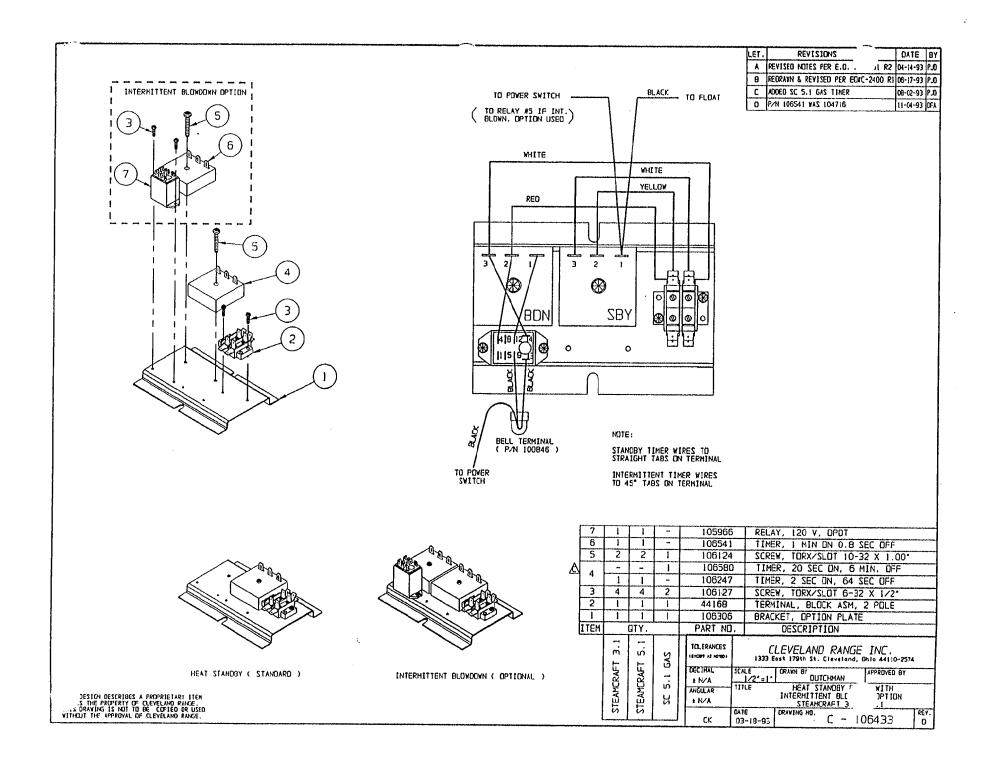



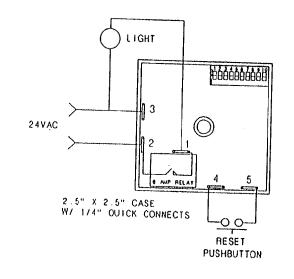

| SWITCH # | TIME AMOUNT |
|----------|-------------|
| 1 •      | 0.5 HR      |
| 2 •      | 1.0 HR      |
| 3 .      | 2.0 HR      |
| 4 •      | 4.0 HR      |
| 5 -      | 8.0 HR      |
| 6 •      | 16.0 HR     |
| 7 •      | 32.0 HR     |
| 8 •      | 64.0 HR     |
| 9 .      | 128.0 HR    |
| 10 •     | 256.0 HR    |
|          |             |



COMBINE SWITCHES FOR TIME DELAY IN HOURS EXAMPLES:

37 HRS • SWITCH 7 + SWITCH 4 + SWITCH 2
250 HRS • SWITCH 9 + SWITCH 8 • SWITCH 7
• SWITCH 6 • SWITCH 5 • SWITCH 3


SOURCE: AIROTRONICS 2747 RT. 20 E. BOX 326 CAZENOVIA, N.Y. 13035

TYPE: CR-2 TGCX83511H5E2 INPUT: 24 VAC. 6 AMP DELAY: 5-511. 5 HR. ON-DLY OPERATION:
SELECT DELAY VIA DIP SWITCH. APPLY 24VAC TO THE TIMER.
AS THE SUPPLY VOLTAGE IS TURNED ON AND OFF TO THE TIMER
THE TIMER WILL KEEP TRACK OF THE ELAPSED TIME THE
SUPPLY VOLTAGE IS ON. ONCE THE TIMERS SUPPLY VOLTAGE HAS
BEEN ON LONGER THAN THE SELECTED DELAY THE RELAY WILL
TRANSFER. THIS IN TURN WILL TURN ON THE INDICATOR LIGHT.
ONCE THIS HAS HAPPENED THE RESET BUTTON WILL BECOME
ACTIVE AND ALLOW THE TIMER TO BE RESET.

| I TEM QTY.                   | PART NO              | 050001                         | 071011      |  |  |
|------------------------------|----------------------|--------------------------------|-------------|--|--|
|                              | 177111 10.           | DESCRI                         | PITON       |  |  |
| TOLERANCES IEXCEPT AS HUTED! | CLEVELAND RANGE INC. |                                |             |  |  |
| DECIMUL<br>± .030            | SCALE<br>1=1         | T                              | APPROVED BY |  |  |
| ANGULAR<br>±   '             | TITLE T              | IMER, CLEAN LI<br>IDIP SWITCHE | GHT<br>S1   |  |  |
| СК                           | DATE<br>05-23-94     | DRAWING NO.                    | 106911 AEV. |  |  |


THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE.

## FOR ON/OFF SWITCH TIMER



FROM: FLOAT (STANDARD)
GEN. STAND-BY TIMER (SBY OPTION)
BELL TERMINAL (TDS AND SBY OPTIONS TOGETHER)


# FOR ELECTRICAL & 60 MINUTE MECHANICAL TIMERS




FROM: FLOAT (STANDARD GEN. STAND-BY T LER (SBY OPTION) BELL TERMINAL (1.5 S AND SBY OPTIONS TOGETHER)


THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANCE. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE JOPPOWAL OF CLEVELAND RANCE,

| LET. | REVISIONS  | DATE BY      |  |  |
|------|--|--------------|--|--|
| ٨    | WAS: HIGH LIMIT NOW: FLOAT<br>PER E.O. IC-2381 RI    | 03-01-93 PJD |  |  |
| В    | 20351 BLACK WAS FROM FLOAT ONLY<br>PER EO (C-2361 B2 | 04-14-93 PJD |  |  |

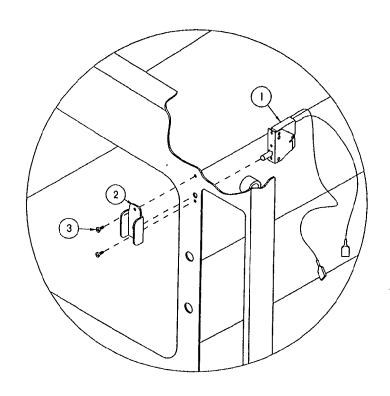

| 3                                 | 2    | 105449           | SCREW, TRUSS HD. 6-32 X .312, S/S                                      |
|-----------------------------------|------|------------------|--|
| 2                                 | 1    | 105442           | GUARD, SWITCH PROTECTION   |
| 1 1                               |      | 104702           | SWITCH, CMPT. STEAM SHUT-OFF   |
| ITEM                              | QTY. | PART NO.         | DESCRIPTION  |
| TOLERANCES IDECT! ALIGNED DECIMAL |      | 1333 E<br>SCALE  | LEVELAND RANGE INC. ast 179th St. Claveland, Only 44110-2574  DRAWN BY |
| ± .030                            |      | NTS              | DUTCHIAN   |
| THOULAN                           |      | TITLE            | STEAM CUT-OFF OPTION<br>STEAMCRAFT 3.1 AND 5.1                         |
| a                                 | Κ ,  | DATE<br>02-03-93 | DRAWING NO. C - 1067 REV. 8  |

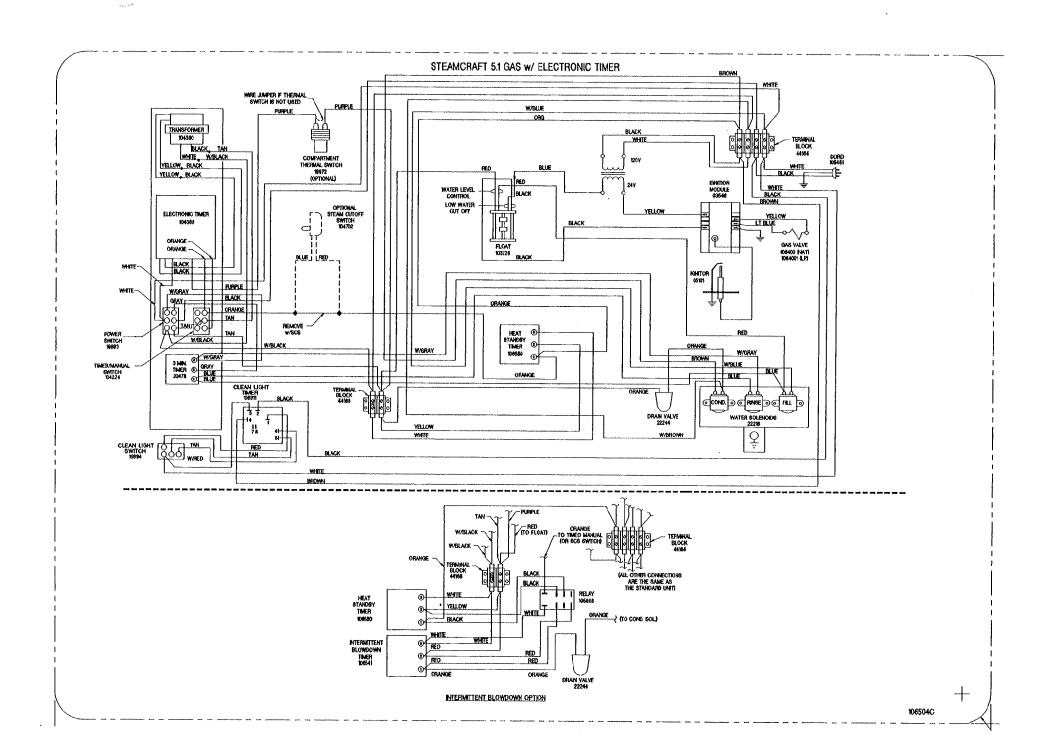

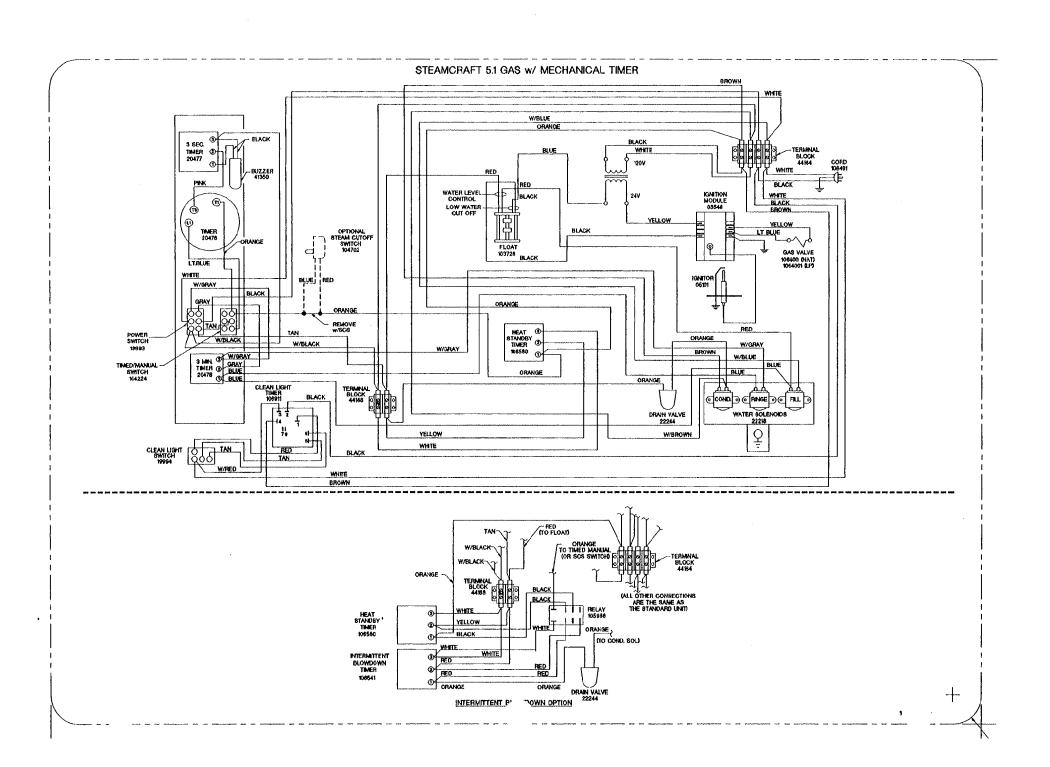



#### CLEVELAND RANGE 21CGA5 SEQUENCE OF OPERATIONS STEAMCRAFT ULTRA 5

#### Mechanical Timer

- 1. To turn the unit on, depress the red on/off rocker switch.
- 2. 115 VAC is sent to the red indicator light.
- 3. 115 VAC is sent to the normally open drain valve closing it.
- 4. 115 VAC is sent through the normally closed water level (top) float switch to the coil of the R1 relay
  - The R1 relay energizes
  - The R1 contacts close 115 VAC is sent to the fill solenoid
- 5. The fill solenoid opens and the generator fills through the drain valve.
  - The water fills to the normally open low water cut off float switch (bottom float).
    - The float is lifted by the water and the switch closes.
  - The water fills to the normally closed water level (top) float switch.
    - The float is lifted by the water and the switch opens.
    - With the switch opened 115 VAC is removed from the coil of the R1 relay.
      - The R1 relay deenergizes and 115 VAC is removed from the fill solenoid and the unit stops filling
    - When the water level drops, the operational water float drops closing the switch and energizing the R1 relay
      - The R1 contacts close 115 VAC is sent to the fill solenoid. The unit fills back to the proper level.
- 6. When the timed/manual switch is in the timed position and time is on the timer
  - 115 VAC is sent from the timer to the R3 relay coil.
    - The R3 relay energizes
    - The R3B contacts close sending 115 VAC to the timer motor
    - The R3A contacts close sending 115 VAC through the optional door switch to the condensate valve and the primary of the 24 VAC ignition transformer.
  - 115 VAC is sent to the #4 terminal on the clean light timer.
    - The clean light timer counts down from the set time (time is set by dip switches on timer)
    - 115 VAC is sent to the amber light in the clean light switch.
    - The light is turned off and the clean light timer is reset by depressing the clean light timer switch.
  - With the sight glass filled the L.W.C.O. float will be raised and the normally open switch is closed.
  - 24 VAC is supplied from the secondary of the transformer through the L.W.C.O. float switch to the ignition module.

- Spark is sent to the igniter.
- 24 VAC is sent to the gas valve.
  - The gas valve opens to the first stage (.7" W.C. natural gas and 2.25" LP) allowing gas to the burner.
  - 6 to 8 seconds later the valve opens to the second stage (3.5" W.C. natural gas and 10" W.C. LP)
- When the gas is ignited the ignition module detects at least 1.5 micro-amps DC through the flame and burner ground wire.
  - If the 1.5 micro-amps DC is not detected in 4 seconds the ignition module locks out and has to be reset by removing 24 VAC to the module. This can be done by turning the steamer on and off.
- 7. With water in the generator and flame heating it, steam is made and directed into the cooking chamber.
- 8. The steamer will continue to steam until the timer runs down.
  - When the timer times down 115 VAC is removed from the R3 relay.
    - The R3 relay de energizes.
    - The R3B contacts open removing 115 VAC from the timer motor
    - The R3A contacts open removing 115 VAC from the heat circuit
  - 115 VAC is sent to the 3 second timer
    - 115 VAC sent to the buzzer for three seconds.
- 9. The steamer is turned off by depressing the on/off rocker switch.
  - 115 VAC is removed from the heat and timer circuits.
  - 115 VAC is removed from the drain valve.
  - 115 VAC is sent to the 3-minute timer and water is sent in to the now open drain valve flushing and cooling the drain.

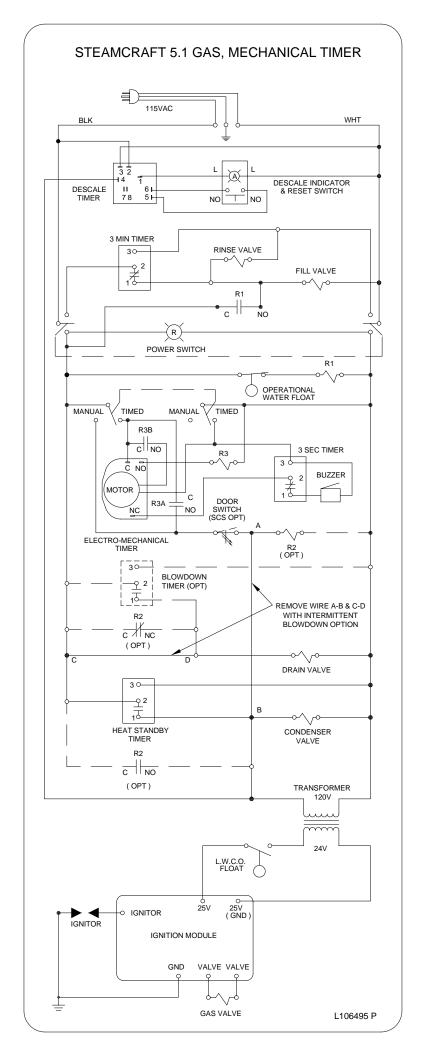

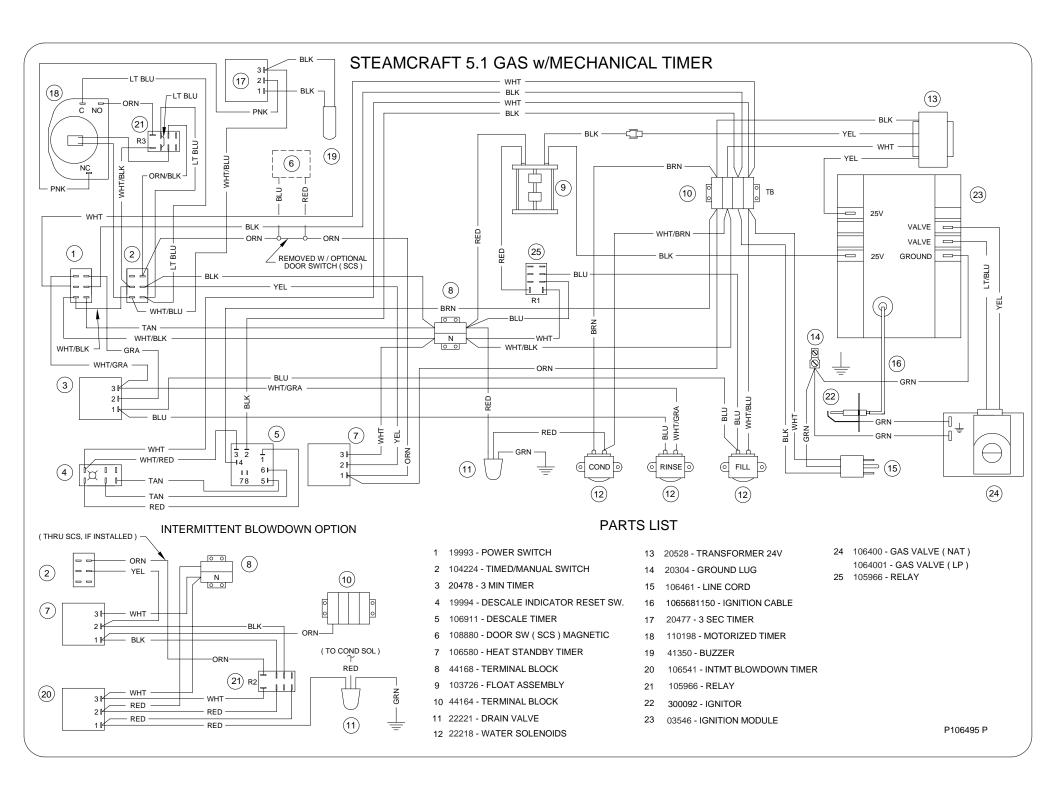


# CLEVELAND RANGE 21CGA5 SEQUENCE OF OPERATIONS


# Electronic Timer Floats


- 1. To turn the unit on, depress the red on/off rocker switch.
- 2. 115 VAC is sent to the red indicator light.
- 3. 115 VAC is sent to the 24 VAC timer transformer.
  - 24 VAC is sent to the timer.
- 4. 115 VAC is sent to normally open drain valve closing it.
- 5. 115 VAC is sent through the normally closed operational water float switch (top float, red wires) to the fill solenoid.
- 6. The fill solenoid opens and the generator fills through the drain valve.
  - The water fills to the normally open low water cut off float switch (bottom float black wires).
    - The water lifts the float and the switch closes.
  - The water fills to the normally closed operational water float switch.
    - The water lifts the float and the switch opens.
    - With the switch opened 115 VAC is removed from the fill solenoid and the unit stops filling.
    - When the water level drops, the operational water float drops closing the switch and energizing the fill solenoid. The unit fills back to the proper level.
- 7. When the timed/manual switch is in the timed position and time is on the timer
  - The timer display will alternate between "PAUS" and the set time. This will continue until the cooking cabinet reaches 193 degrees and the thermal switch closes. Then the timer will begin timing down.
  - 115 VAC is sent from the timer through the optional door switch to the condensate valve and the primary of the 24 VAC ignition transformer.
  - 115 VAC is sent to the #4 terminal on the clean light timer.
    - The clean light timer counts down from the set time (time is set by dip switches on timer)
    - 115 VAC is sent to the amber light in the clean light switch.
    - The light is turned off and timer reset by depressing the clean light timer switch.
  - With the sight glass filled the L.W.C.O. float will be raised and the normally open switch is closed.
  - 24 VAC is supplied from the secondary of the transformer through the L.W.C.O. float switch to the ignition module.
    - Spark is sent to the igniter.
    - 24 VAC is sent to the gas valve.


- The gas valve opens to the first stage (.7" W.C. natural gas and 2.25" LP) allowing gas to the burner.
- 6 to 8 seconds later the valve opens to the second stage (3.5" W.C. natural gas and 10" W.C. LP)
- When the gas is ignited the ignition module detects at least 1.5 micro-amps DC through the flame and burner ground wire.
  - If the 1.5 micro-amps DC is not detected in 4 seconds the ignition module locks out and has to be reset by removing 115 VAC to the module.
- 8. With water in the generator and flame heating it steam is made and directed into the cooking chamber.
- 9. The steamer will continue to produce steam until the timer counts down.
  - When the timer times down 115 VAC is removed from the heat circuit and condensate circuit.
- 10. The steamer is turned off by depressing the on/off rocker switch.
  - 115 VAC is removed from the heat and timer circuits.
  - 115 VAC is removed from the drain valve.
  - 115 VAC is sent to the 3-minute timer and water is sent in to the now open drain valve flushing and cooling the drain.

#### STEAMCRAFT 5.1 GAS, ELECTRONIC TIMER

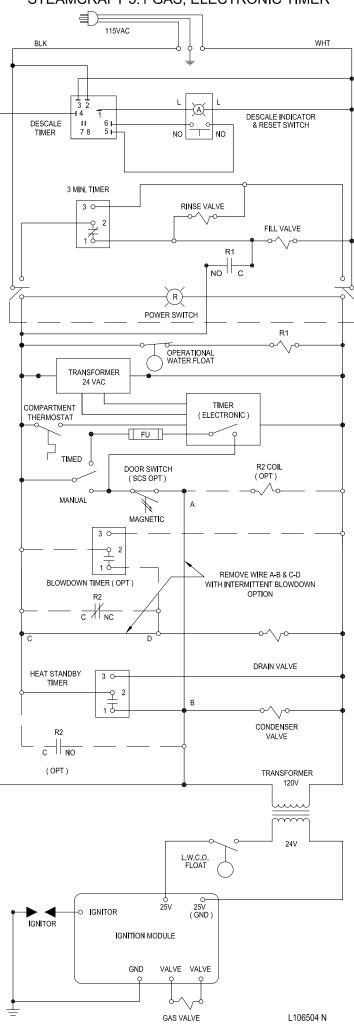


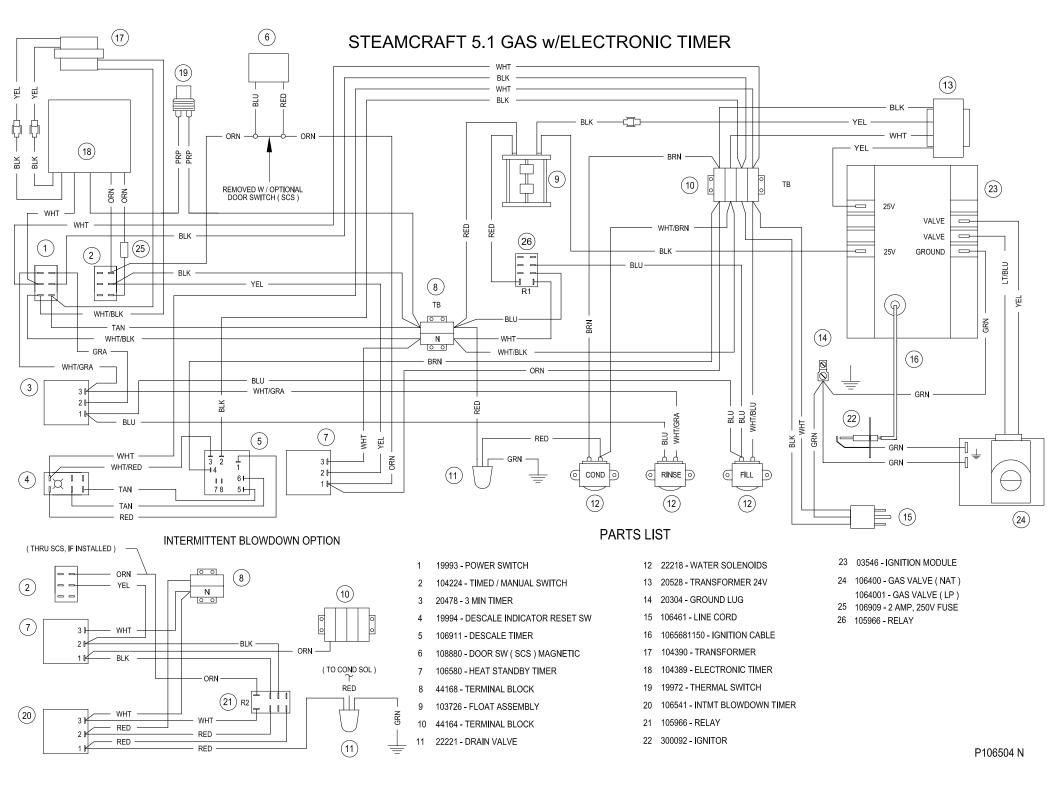

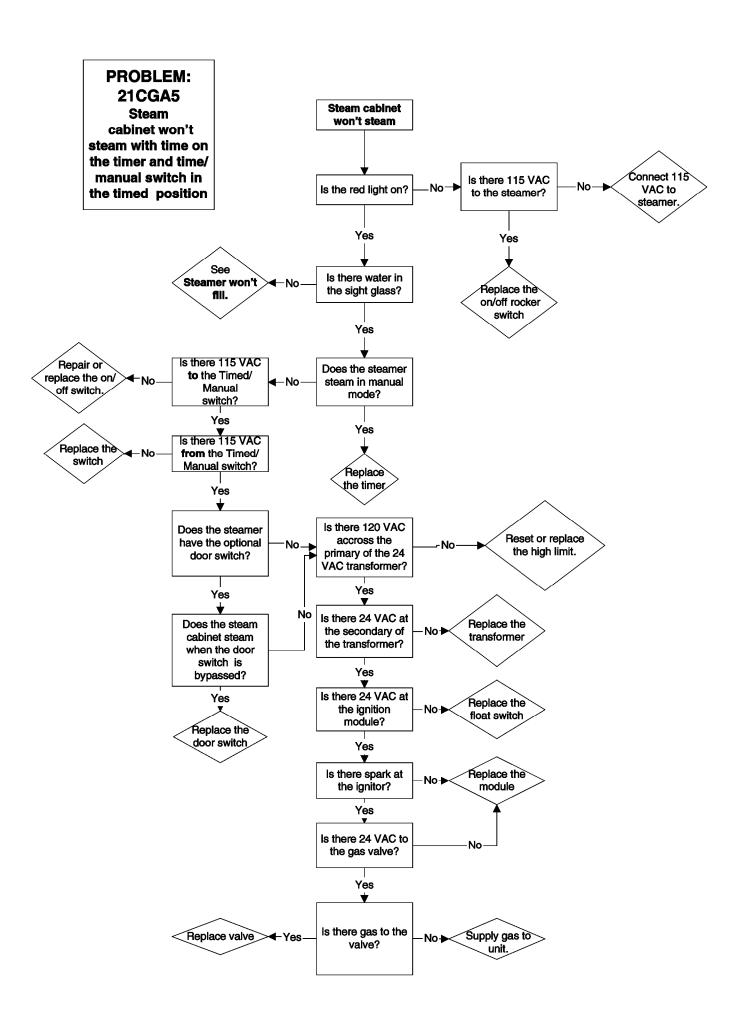


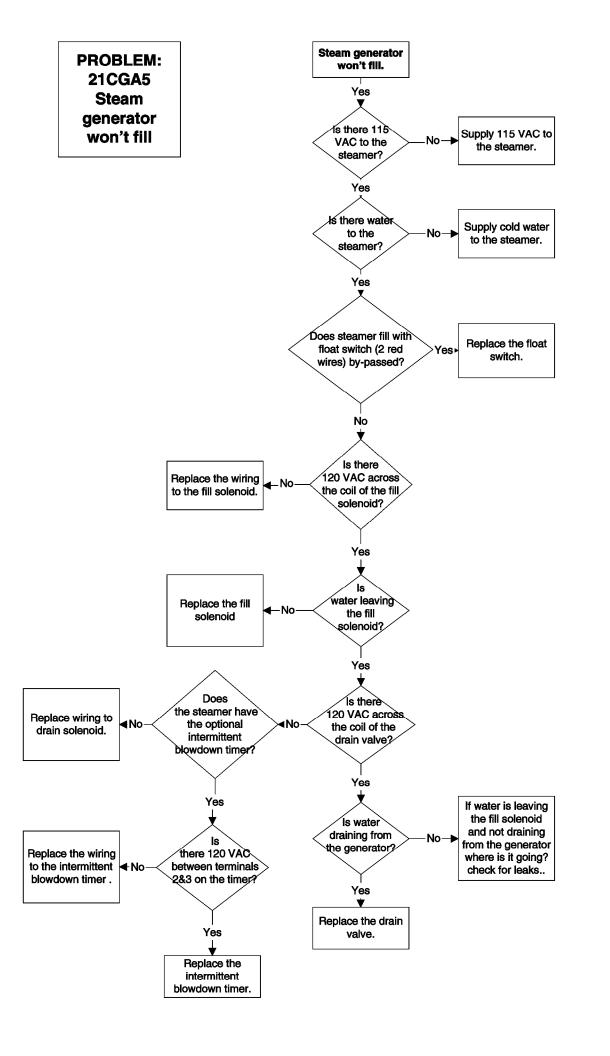



# PROBLEM: 21CGA5 Electronic timer displays "PAUS" and won't count down

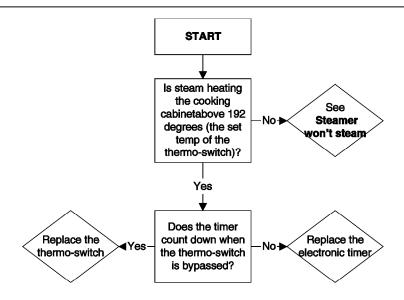


#### PROBLEM: 21CGA5 Steam leaks around the door.

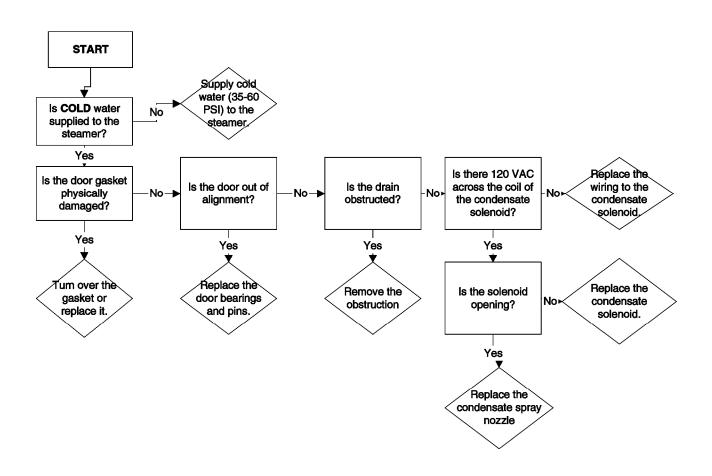


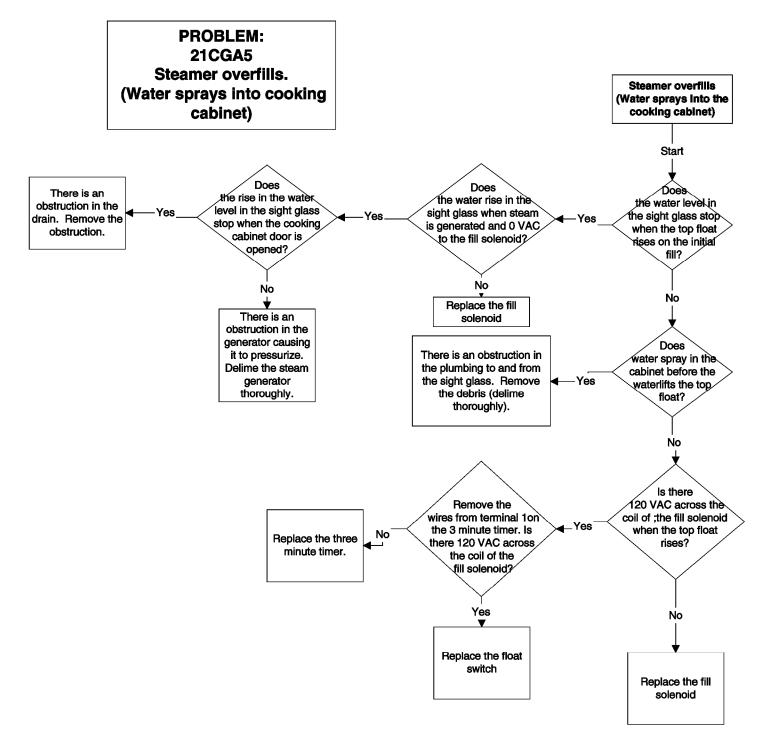

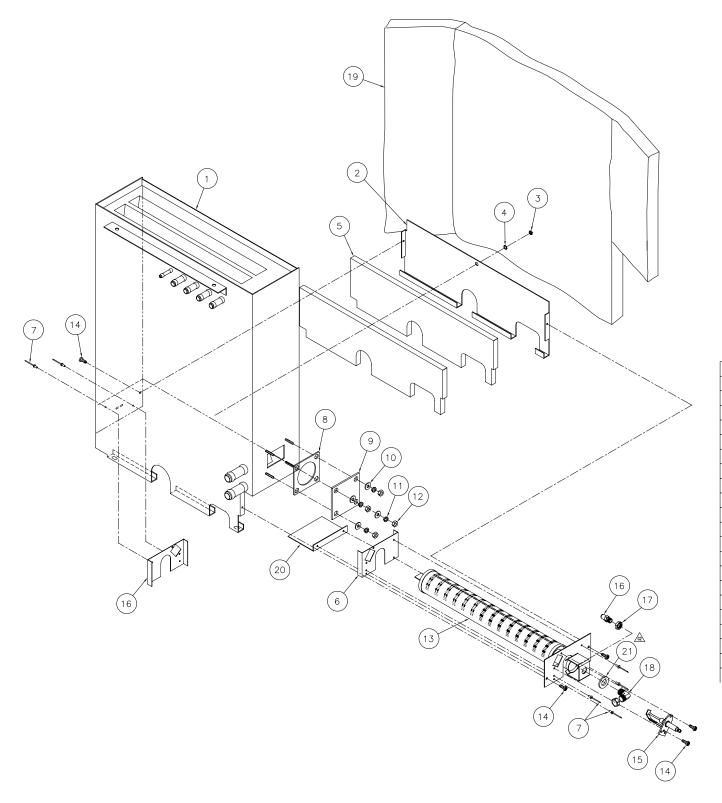


| 21 | 1 | 100539  | WASHER, 0.563 ID                                   |  |
|----|---|---------|--|--|
| 20 | 1 | 111146  | BAFFLE, BURNER, 21CGA5                             |  |
| 19 | 1 | 106408  | INSULATION, GENERATOR WRAP                         |  |
| 18 | - | 106459  | FITTING, COMPRESSION, 1/2 T x 1/4-18 NPT, 90°, MOD |  |
| 17 | - | 106460  | NUT, 1/4-18 NPT, BRASS                             |  |
| 16 | - | 1064021 | ORIFICE, #41 DRILL, LP GAS                         |  |
| 16 | - | 106402  | ORIFICE, #21 DRILL, NATURAL GAS                    |  |
| 15 | - | 300092  | ELECTRODE, REVERSED, COMBINATION IGNITOR/SENSOR    |  |
| 14 | 5 | 106126  | SCREW, TORX, 8-32 x 1/2                            |  |
| 13 | - | 106582  | BURNER, WELD ASSEMBLY                              |  |
| 12 | 4 | 14618   | NUT, HEX, 1/4-20                                   |  |
| 11 | 4 | 23105   | WASHER, LOCK, 1/4, SST                             |  |
| 10 | 4 | 23116   | WASHER, FLAT, 1/4 ID x 5/8 OD                      |  |
| 9  | 1 | 104614  | COVER, BLOCK-OFF                                   |  |
| 8  | 1 | 07128   | GASKET, HEATER                                     |  |
| 7  | 6 | 18358   | RIVET, 1/8 DIA., FLUSH BREAK, SST                  |  |
| 6  | 2 | 106362  | BRACKET, SIDE, INSULATION SUPPORT                  |  |
| 5  | 2 | 106360  | INSULATION, CUT, COMBUSTION CHAMBER                |  |
| 4  | 1 | 23114   | WASHER, LOCK, INT. TOOTH, #10                      |  |
| 3  | 1 | 14659   | NUT, HEX, 10-24                                    |  |
| 2  | 1 | 106361  | BRACKET, REAR, INSULATION SUPPORT                  |  |
| 1  | 1 | 106407  | GENERATOR ASSY, WELD, SC 5.1 GAS                   |  |

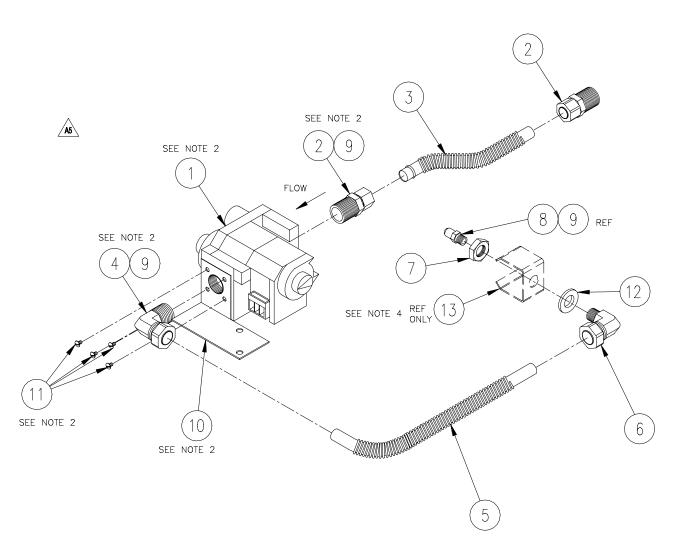

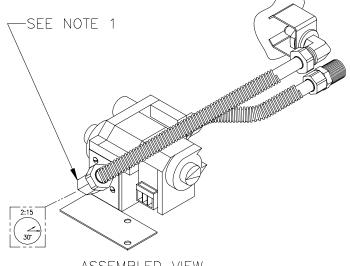

ASSEMBLED VIEW

| TOV | SHOWN | A   | 14 | 2   | 14672  | NUT, HEX, 10-32, LOCKING                      |
|-----|-------|-----|----|-----|--------|---|
| REF | ONLY  | M   | 13 | -   | 106582 | BURNER, WELD ASSEMBLY, H.L. W/BRACKET         |
|     |       | M   | 12 | 1   | 100539 | WASHER, 9/16 ID X 1 1/16 OD                   |
|     |       | M   | 11 | 4   | 19156  | SCREW, ROUND HD SLOTTED 8-32 X 3/4, ZINC PLTD |
|     |       | M   | 10 | 1   | 111099 | BRACKET, GAS VALVE MTG, 21CGA5                |
|     |       |     | 9  | A/R | 00934  | SEALANT, PIPE DOPE                            |
|     |       | . ( | -  | -   | 107531 | ORIFICE, NAT, 8001'-10000', #27 DRILL, 21CGA5 |
|     | _     | ◬◁  | -  | -   | 107534 | ORIFICE, NAT, 6001'-8000', #25 DRILL, 21CGA5  |
|     |       |     | -  | -   | 107530 | ORIFICE, NAT, 4001'-6000', #23 DRILL, 21CGA5  |
|     |       | `   | -  | -   | 107527 | KIT, TURKEY BASKET QTY 1, ROTISSERIE          |
|     |       |     | 8  | -   | 106402 | ORIFICE, NAT, UP TO 2000' #21 DRILL, 21CGA5   |
|     |       |     | 7  | 1   | 106460 | NUT, 1/4 NPT, BRASS                           |
|     |       |     | 6  | 1   | 106459 | FITTING, COMP. 1/2 T X 1/4 NPT, 90°           |
|     |       | A2  | 5  | 1   | 111101 | GAS LINE, FLEXIBLE, 1/2 X 13.000 SST          |
|     |       |     | 4  | 1   | 06205  | FITTING, COMP. 1/2 T X 1/2 MPT, 90°           |
|     |       | Αì  | 3  | 1   | 111100 | GAS LINE, FLEXIBLE, 1/2 X 7 SST               |
|     |       |     | 2  | 2   | 06204  | FITTING, COMP. 1/2 T X 1/2 MPT, STR           |
|     |       |     | 1  | 1   | 106400 | GAS VALVE, NATURAL                            |
|     |       |     |    |     |        |   |

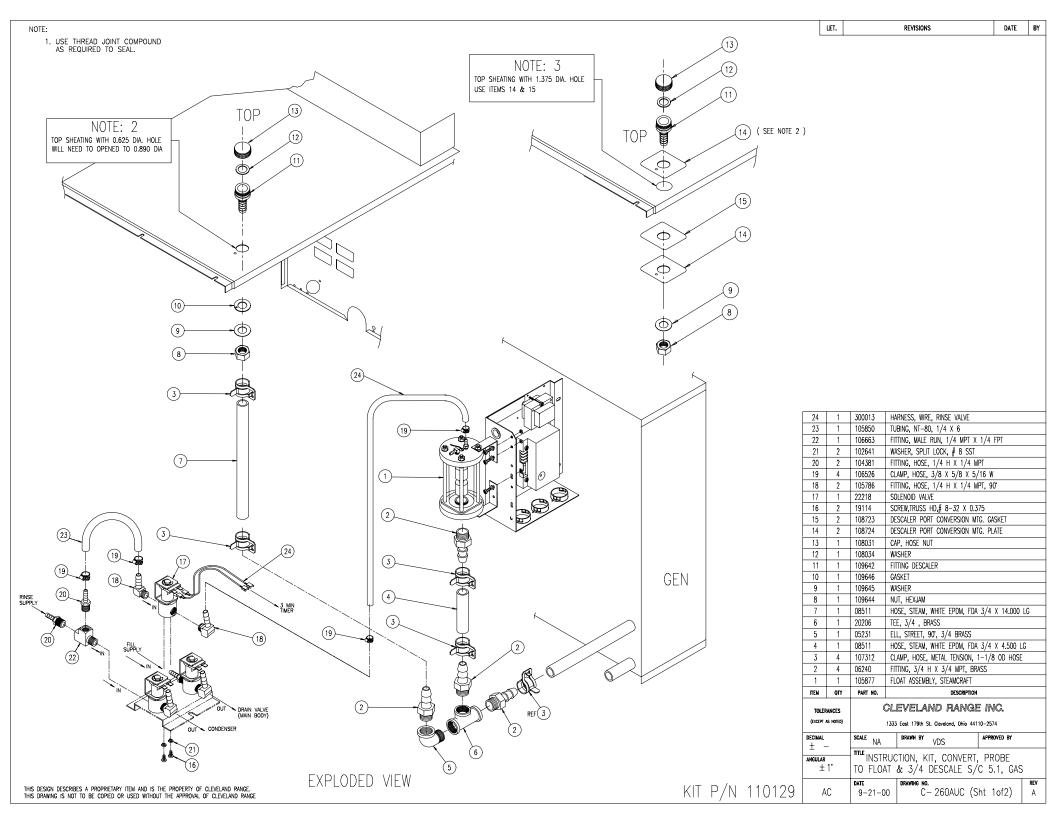



### Descaling Procedure-SteamCraft Ultra and Gemini Series

| How Much DISSOLVE to Use |                |  |  |  |  |
|--------------------------|----------------|--|--|--|--|
| Model                    | Dissolve       |  |  |  |  |
| Ultra 3                  | 1/2 Gallon     |  |  |  |  |
| Ultra 5                  | 1 Gallon       |  |  |  |  |
| Ultra 10 (Elec.)         | 1 Gallon (ea.) |  |  |  |  |
| Ultra 10 (Gas)           | 1½ Gallon      |  |  |  |  |
| Gemini 6 & 10            | 1 Gallon (ea.) |  |  |  |  |

### 1. Turn the unit OFF and open the doors:

This will drain and rinse the generator for about 3 minutes.

#### 2. Turn the unit power back On:

The generator will begin to refill with water.

### 3. Select Timed with the Timed/Manual switch:

DO NOT start the timer, since you do not want to heat the water during descaling. Leave the doors open.

4. Remove descaling port cap and add with the specified amount of DISSLOVE: (See chart above)

Do this while the unit is refilling. The generators can take-up to 8 minutes to refill.

 After refill has stopped, add extra tap water into the descaling port until liquid is seen entering the cooking cabinet. Note: Ultra 10 gas will have liquid coming out of the drain,

Adding extra water when descaling will raise the descaling solution higher than the normal fill level, allowing the DISSOLVE to work on sensors and surfaces above the water line

Note: Some SteamCraft Ultra models (the electric powered Ultra 10 and Gemini 6 and 10, for example) have two generators and two descaling ports. Both units should be descaled at the same time, using this procedure

- 6. Let the descaler soak in generator for approximately one hour:
- After one hour, turn the unit power
   Off: This will drain and rinse the generator for about 3 minutes.



- 8. After the 3-minute drain cycle completes, turn the unit back ON. After the filling has stopped, add water until liquid enters the cooking compartment (or drain for the ultra 10 gas), and then turn the unit OFF. This will drain and flush any residue from the water level control assembly. Replace descaling cap.
- After the 3 minute drain cycle completes, Turn the unit ON and set the Timer for 20 minutes: Make sure the Time/Manual switch is in the timed setting and the doors are closed.

## 10. When the timer times out (after 20 minutes) turn the power Off:

This will drain and rinse the generator for about 3 minutes.

This ends the descaling procedure. You can now turn the unit back on and resume normal startup and cooking operations.