Parts Manual

Counter Type Electric Convection Steamer



Series: SteamCraft Models 21CET8


1333 East 179th Street Cleveland, Ohio 44110


Phone: (216) 481-4900


1-800-338-2204


Fax: (216) 481-3782 www.clevelandrange.com




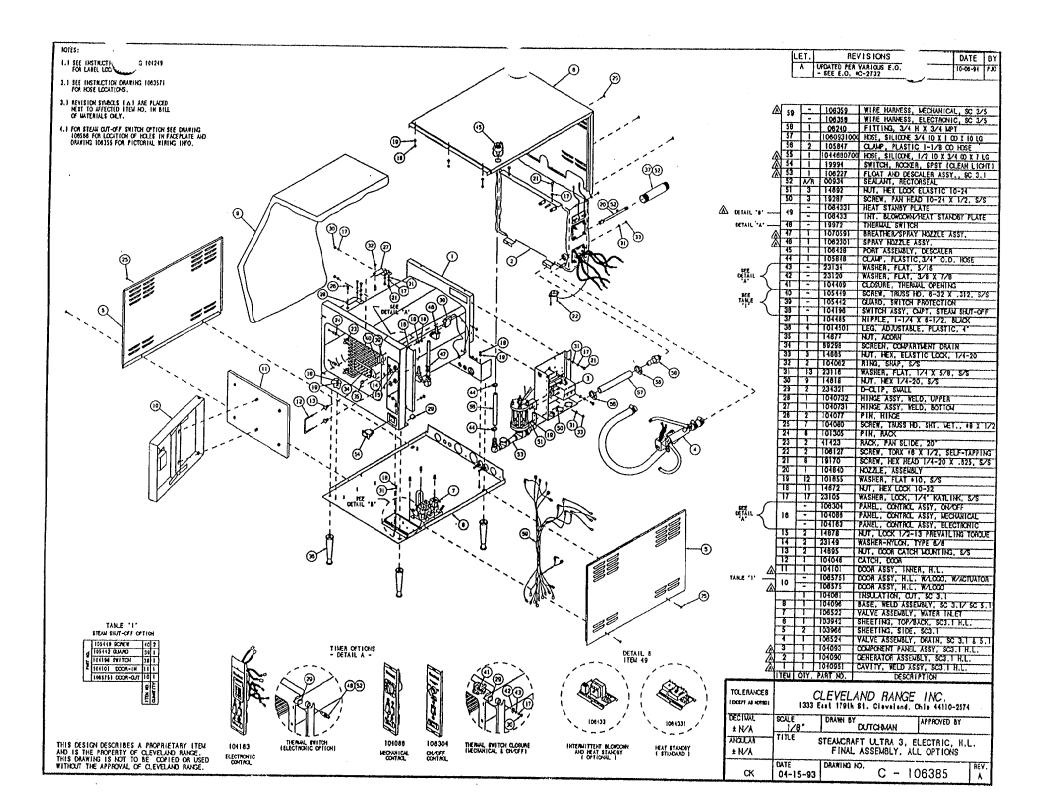


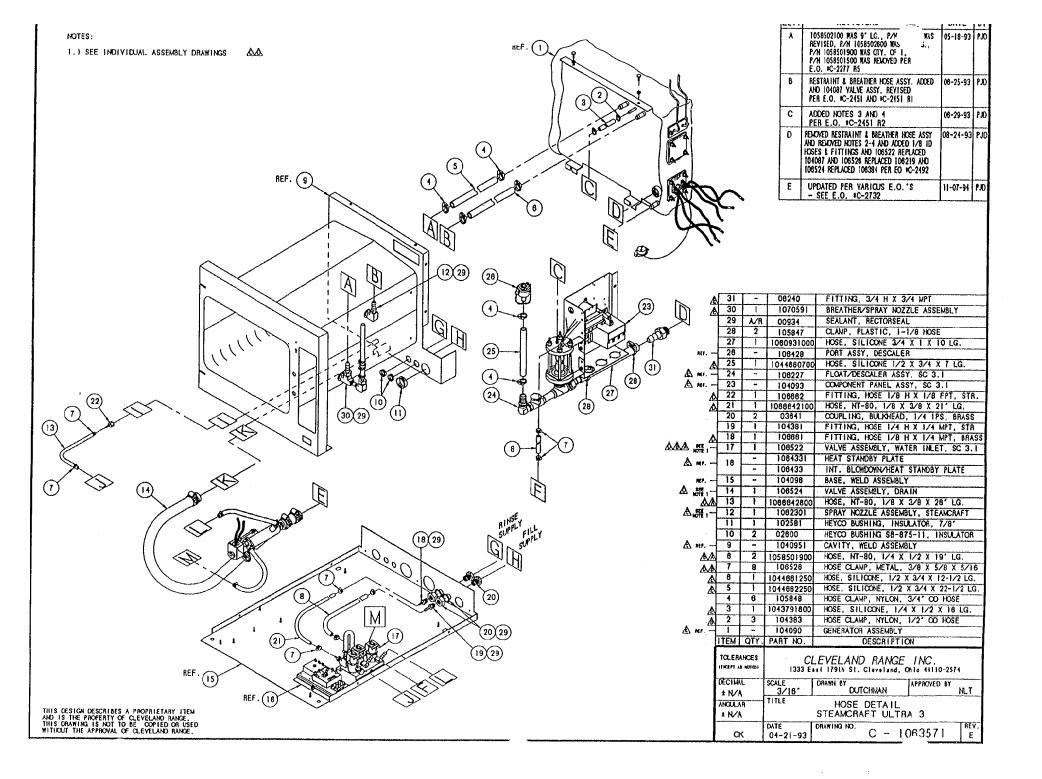


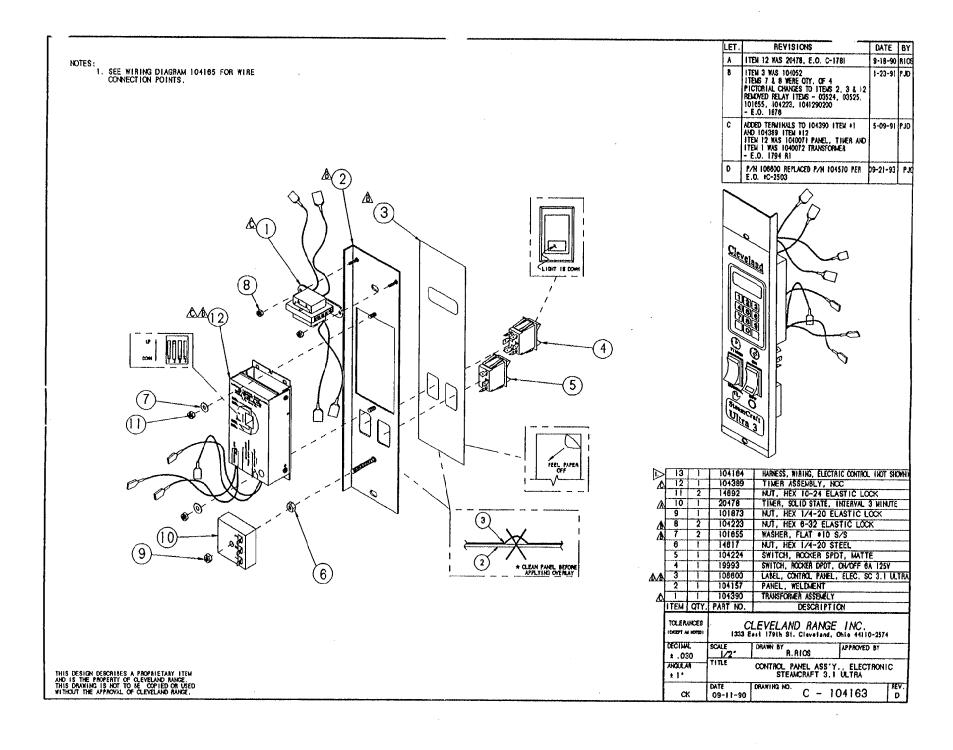

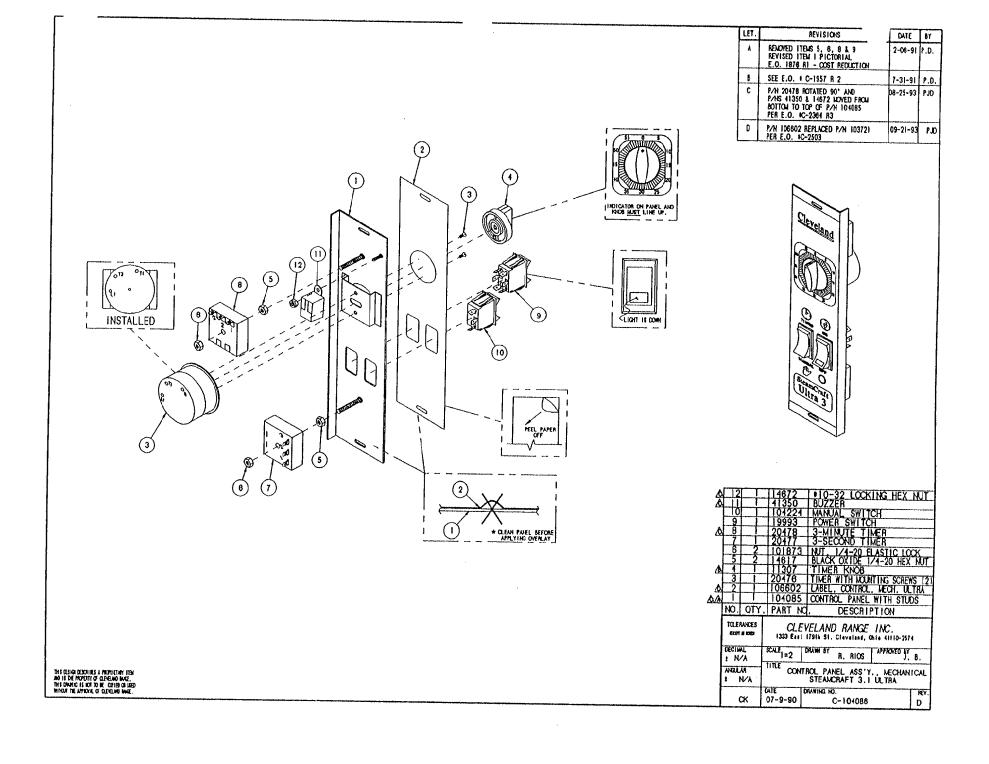

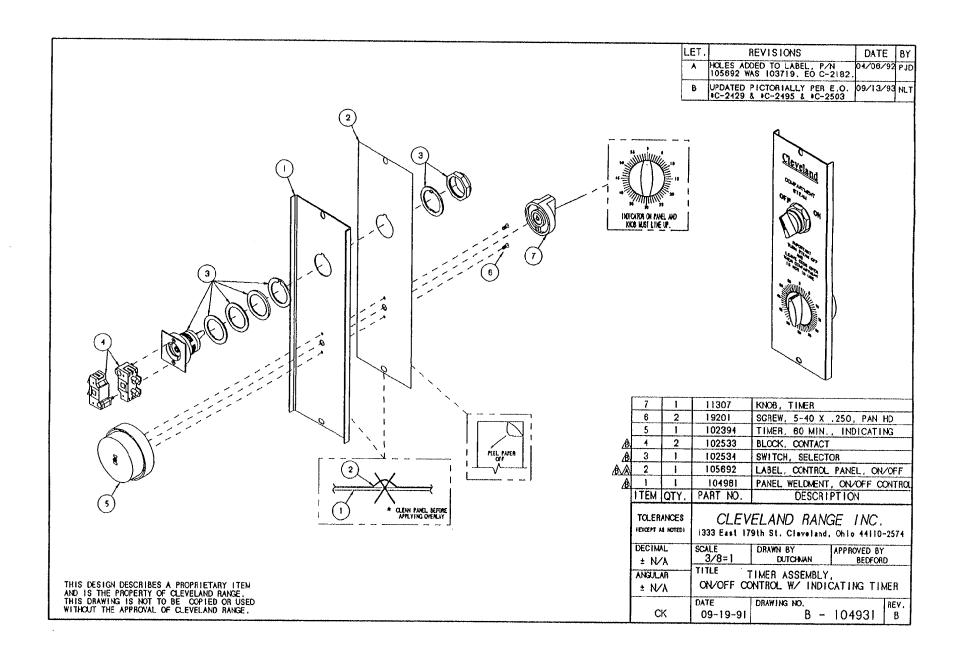


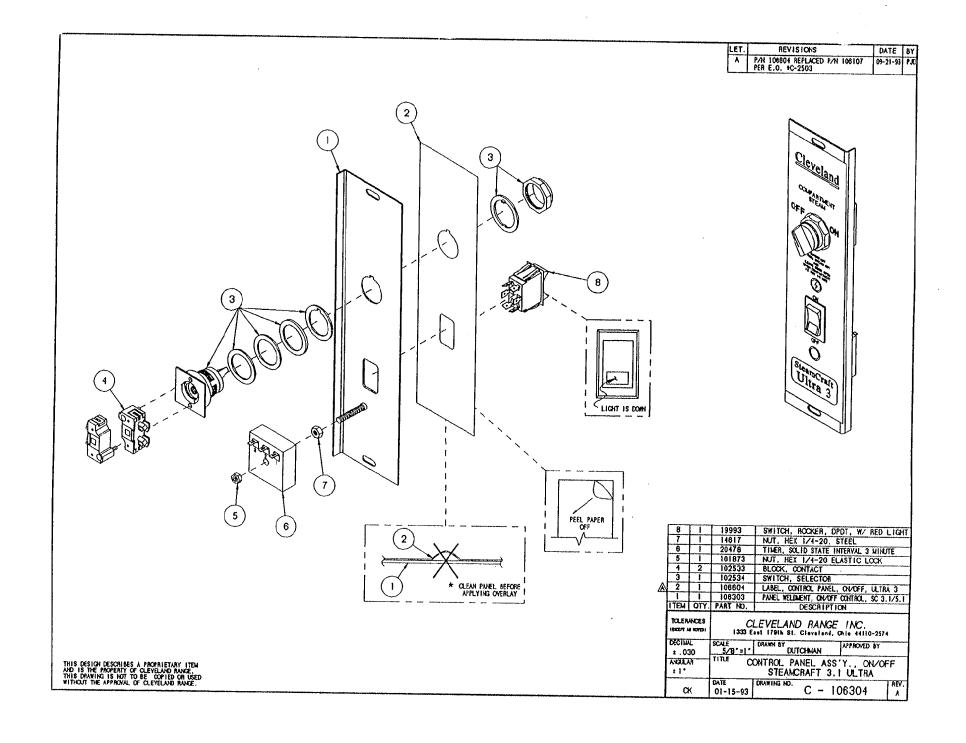


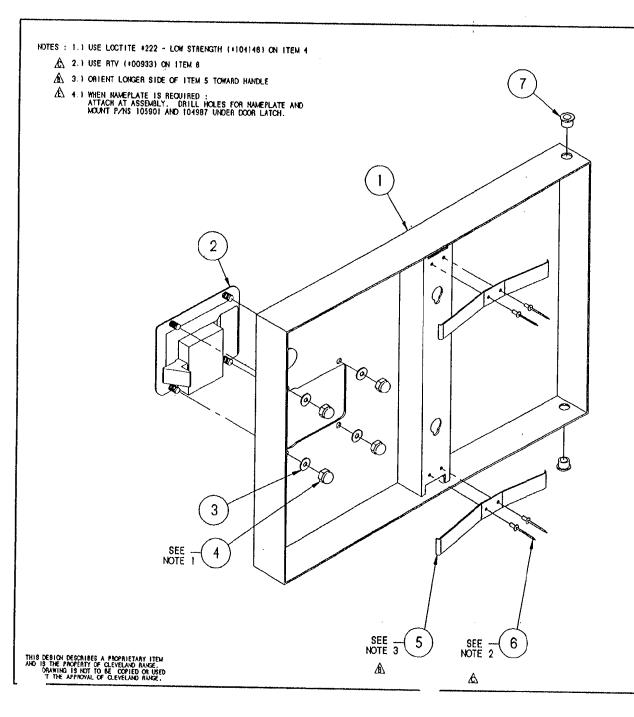



LET.	REVISIONS	DATE	BY
B	NOTE 3 WAS UPDATED, WAS ITEM 8 CALLOUT PER E.O. AC-1908	01-02-91	DJP
С	NOTE 2 REVISED, WAS ITEN 7 CALLOUT PER E.O. 4C-1908 RI	03-19-92	10
D	P/NS 105901 & 104987 AD0ED PER E.O. #C-2441 R2	06-28-93	10
E	P/NS 105901 & 104987 REF. ONLY PER E.O. #C-2441 R3	08-05-93	7.0
F	P/NS 105901 & 104987 REMOVED PER E.O. #C-2441 R5	12-13-93	7.00


	,	· · · · · · · · · · · · · · · · · · ·	
7	2	103641	BUSHING, BRONZE
0	4	18357	RIVET, 1/6" DIA. FLUSH BREAK, S/S
5	2	102228	SPRING, DOOR
4	4	14879	NUT, #10-24 ACORN, S/S
3	4	101655	WASHER, 110 FLAT, S/S
2	1	103643	LATCH, DOOR - PADOLE TYPE
1	1	1035271	OUTER DOOR WELDMENT, H.L.
TEM	QTY.	PART NO.	DESCRIPTION
TOLER IDEEPT		1333 E	LEVELAND RANGE INC.
± N/	_	5/8=1	DUTCHNAN APPROVED BY
# N/		TITLE	DOOR, CUTER ASSEMBLY. H.L. SC 3.1 CONV. W/ SWIT TUATOR
C	ĸ	DATE 02-28-91	DRAWING HO. C - 10. J/1 F

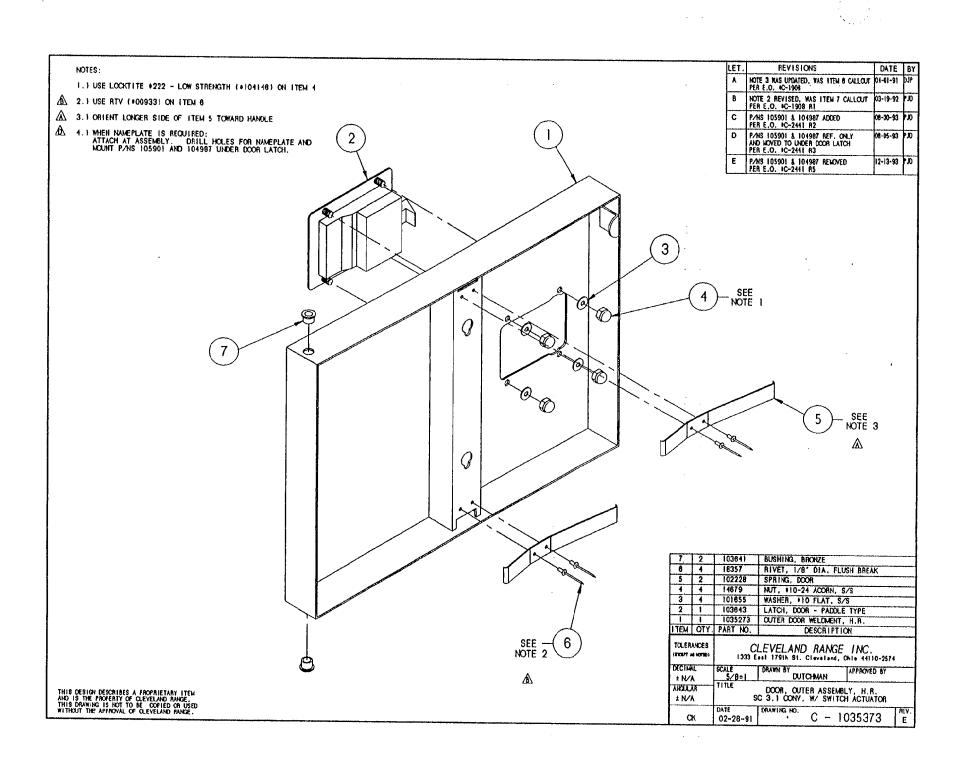

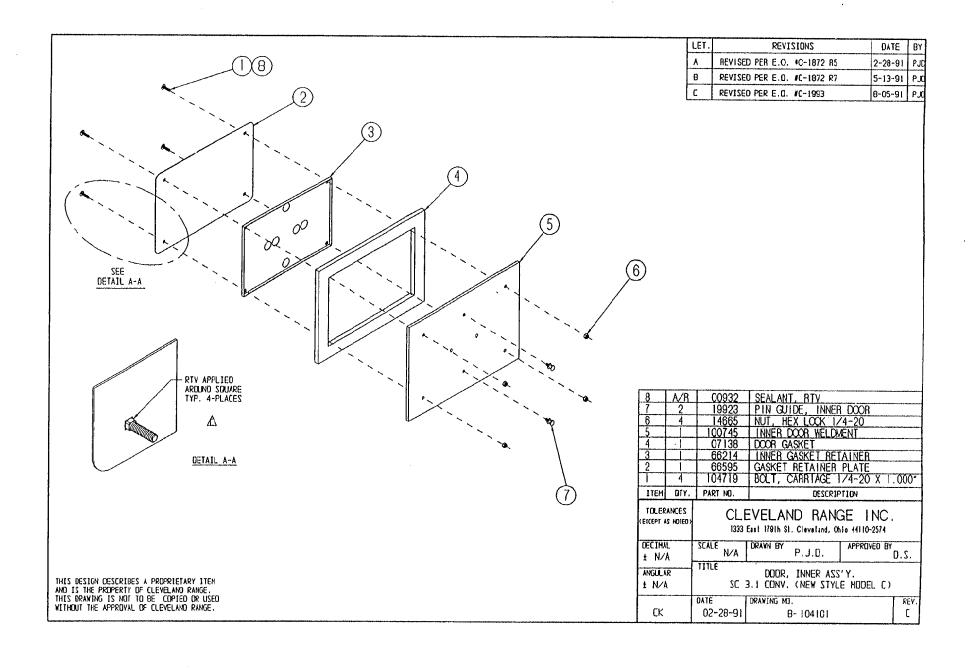

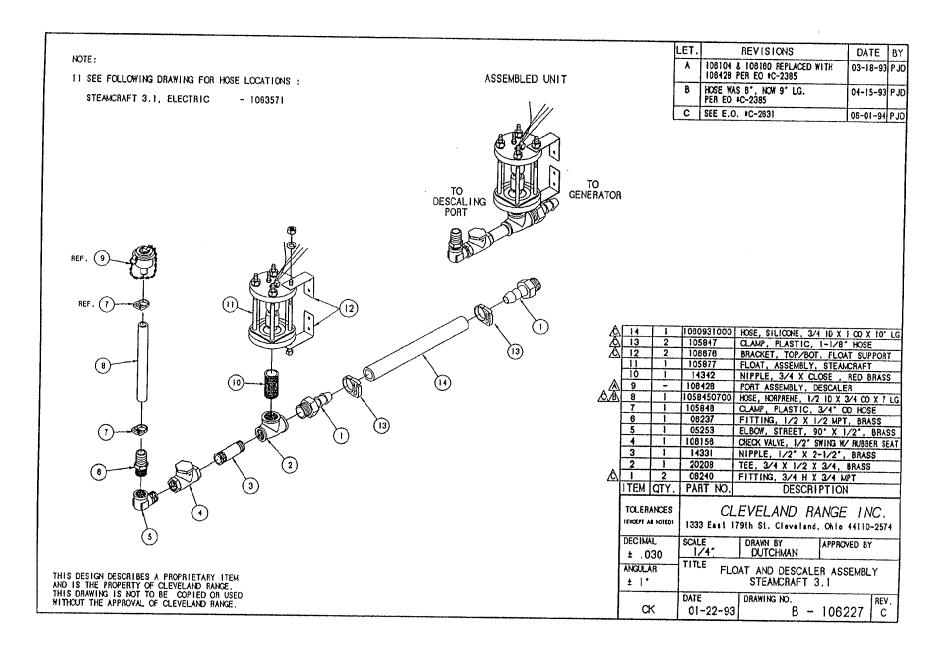



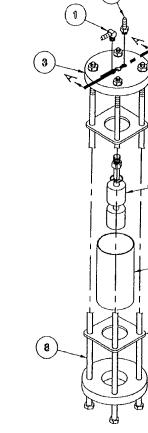

(5)(11)

EXPLODED ASSEMBLY SCALE: 1/4=1

THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DRAWING IS NOT TO BE COPIED OF USED WITHOUT THE APPROVAL OF CLEVELAND RANGE.


ASSEMBLED VIEW SCALE: 1/4=1


ELECTRICAL -

REFERENCE: 260AHM 5 OF 5

LET.	REVISIONS	DATE	BY
A	CORRECTED P/N 105787	7-30-92	SM
В	ROTATED 90° P/NS 105787 & 104380 PER EO *C-2304	10-10-92	PD
С	THIS ASSEMBLY REPLACES P/N 104091 ON SC 3.1, 5.1 ELECT. & SC 10 ELECT. PER EO #C-2277 R3	02-02-93	PD

	11	A/R	00934	SEALANT, RECTORSEAL				
	10	4	14618	NUT, HEX HEAD, 1/4-20, S/S				
	9	4	23105	WASHER, SPLIT LOCK, 1/4, S/S				
	8	4	101276	SCREW, HEX HEAD, 1/4-20 x 5.5, S/S				
	7	1	101010	CAP, FLOAT BOTTOM				
	6	1	1040190388	TUBE, POLYSULFONE, 2 x .125 x 3.875				
	5	1	103726	SWITCH ASSEMBLY, FLOAT				
	4	2	104041	GASKET, FLOAT ASSEMBLY				
	3	1	104039	TOP, FLOAT, STEAMCRAFT				
	2	1	104380	FITTING, HOSE BARB, 1/4 H x 1/8 MPT				
\triangle	1	1	105787	FITTING, HOSE BARB, 90°, 1/4 H x 1/8 MPT				
	ITEM	QTY.	PART NO.	DESCRIPTION				
	TOLERA			EVELAND RANGE INC. 9th St. Cleveland, Ohio 44110-2574				
	DECIM/ ± N/	-	SCALE DRAWN BY APPROVED BY AS SHOWN S. MILEWSKI					
	ANGUL/	\R	TITLE A FL	OAT ASSEMBLY, STEAMCRAFT ELECTRIC, 3.1 AND 5.1				
	CI	Κ.	DATE 05-28-92	DRAWING NO. B - 105877 C				

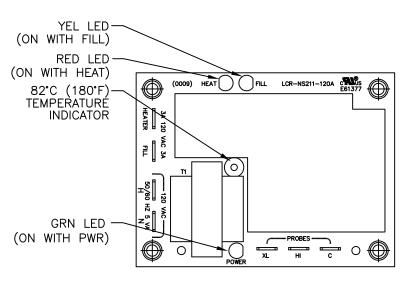

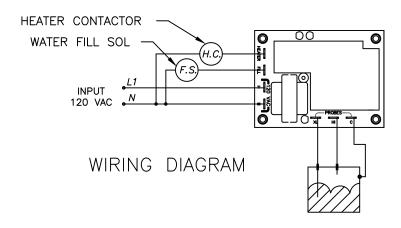

GENERAL DESCRIPTION

THIS SOLID STATE CONTROLLER SERVES AS A DUAL LEVEL WATER SENSING DEVICE. IT'S FUNCTIONS ARE TO:

- 1. MONITOR AND MAINTAIN A PRESET OPERATING WATER LEVEL WITHIN A STEAM GENERATOR VESSEL, AND
- 2. MONITOR THE SAFE LOW WATER LIMIT FOR HEATER OPERATION AND PROVIDE HEATER LOCK-OUT FOR UNSAFE OPERATION.


EACH FUNCTION WILL BE CONTROLED BY RESISTANCE SENSING BETWEEN THE PROBES ("HI" & "LOW" TERMINALS) AND A GROUNDED COMMON ("C" TERMINAL).


LOW PROBE OPERATION

WHEN WATER CONTACTS PROBE, RESISTANCE BETWEEN "LOW" PROBE AND COMMON "C" WILL BE BELOW SET POINT (50 K OHM) AND OUTPUT RELAY WILL BE ACTIVATED IMMEDIATELY TO SUPPLY 120 VAC FROM L1 TO HTR TERMINAL. WHEN CONTACT BETWEEN WATER AND PROBE IS BROKEN (RESISTANCE GREATER THAN 50 K OHM) THE RELAY WILL BE DEACTIVATED WITHIN 0-2 SECONDS.


HI PROBE OPERATION

AS WATER MAKES CONTACT WITH PROBE, RESISTANCE BETWEEN "HI" AND COMMON "C" WILL BE BELOW SET POINT (50 K OHM) AND OUTPUT RELAY IS DEACTIVATED IMMEDIATELY. WHEN WATER BREAKS CONTACT WITH "HI" PROBE DELAY TIMING STARTS. TIMING IS NOT ACCUMULATIVE AND DELAY TIMER WILL BE RESET TO ZERO ANY TIME RESISTANCE BETWEEN "HI" PROBE AND COMMON "C" GOES BELOW SET POINT (50 K OHM). WHEN RESISTANCE BETWEEN HI PROBE AND COMMON "C" REMAINS ABOVE SET POINT FOR MORE THAN 5 SEC. (-2,+0 SEC.) THE OUTPUT RELAY ACTIVATED TO PROVIDE 120 VAC FROM L1 TO WF TERMINAL.

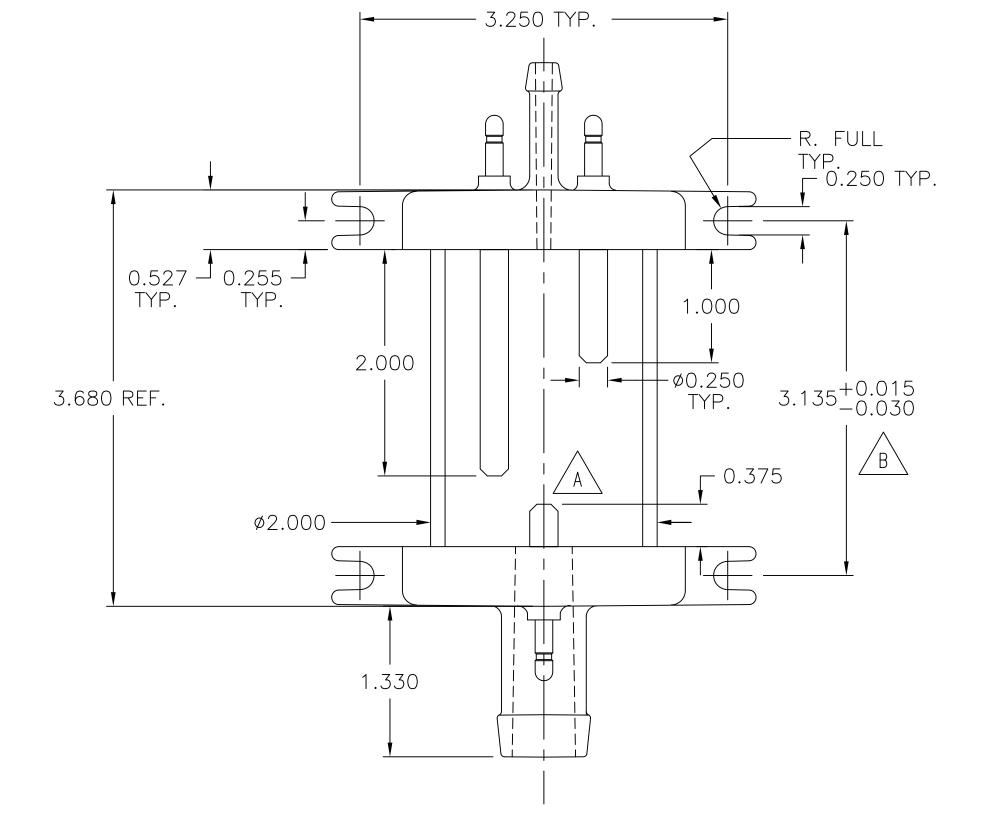

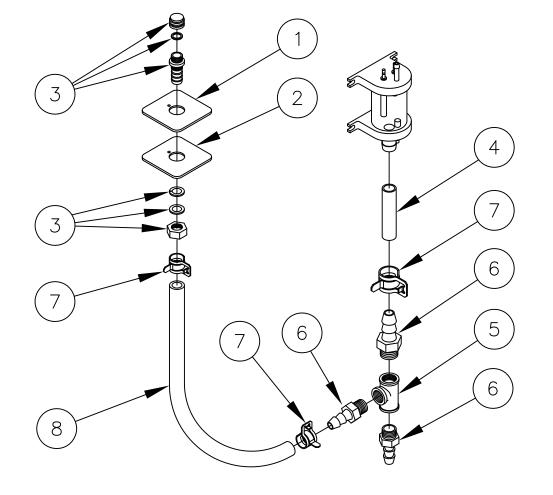

8	1	085112700	HOSE, WHITE, EPDM, 3/4 ID X 27.000 LG
7	2	107312	CLAMP, HOSE METAL TENSION, 1.125 OD HOSE
6	2	06240	FITTING, HOSE BARB, 3/4 X 3/4
5	1	20206	TEE, 3/4 BRASS
4	1	085110600	HOSE, WHITE, EPDM, 3/4 ID X 6.000
3	1	109641	PORT ASSEMBLY, DESCALER
2	1	108724	PLATE, DESCALER PORT CVRSN
1	1	108723	GASKET, DESCALER PORT CVRSN

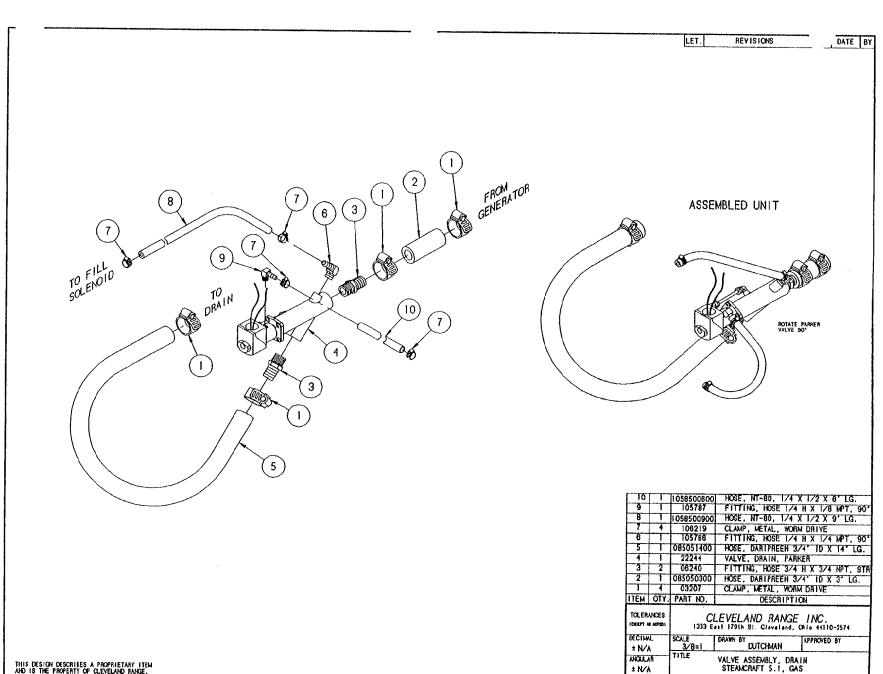


DRAWING NO.


СК


05-12-93

C - 106524

THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEYELAND PANCE. THIS GRAWING IS NOT TO SE COPIED OR USED WITHOUT THE APPROVAL OF CLEYELAND MANCE.

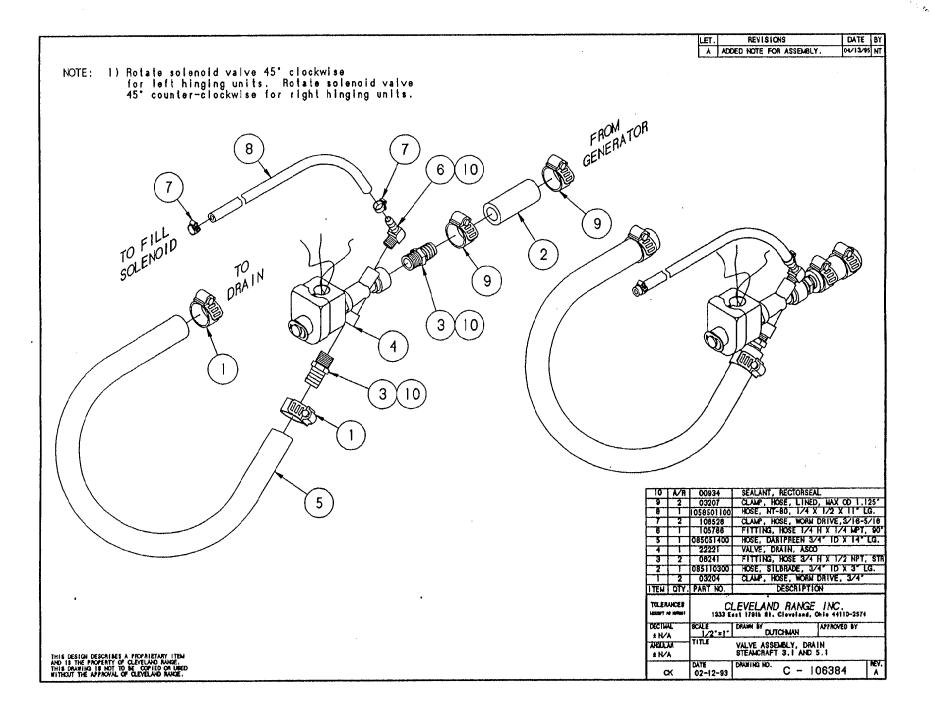


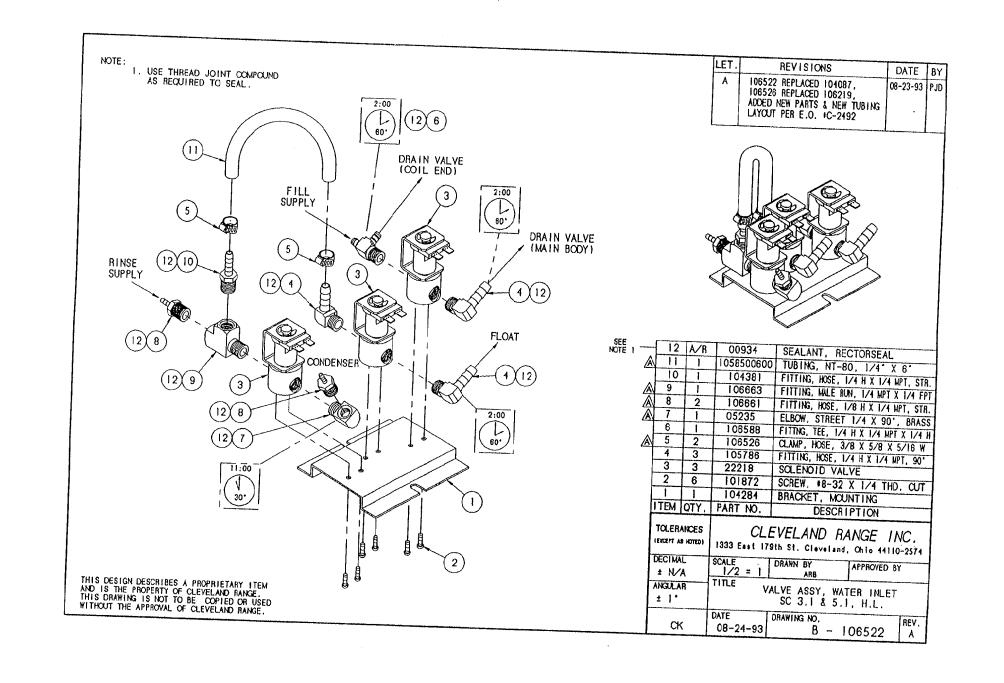

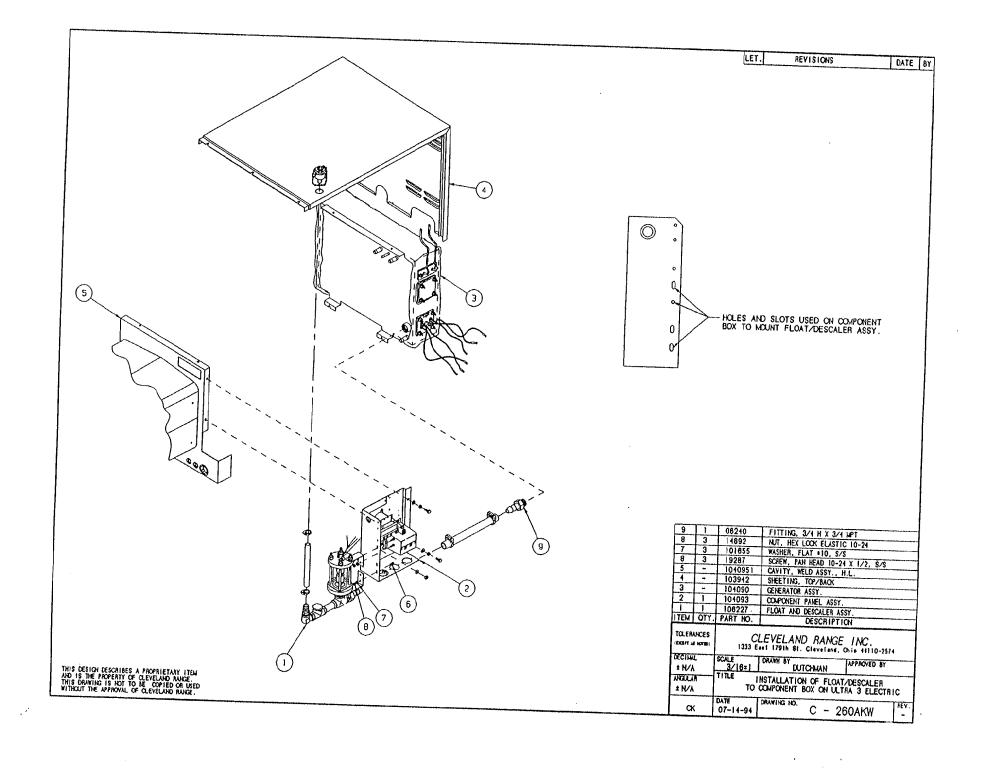

20178, 7

LET. **REVISIONS** DATE BY A SEE E.O. IC-2732 12-18-94PJD

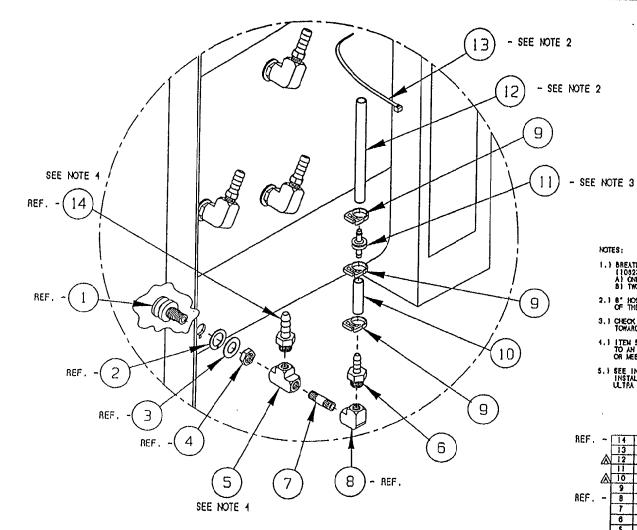


NOTES:

- 1.) BREATHER ASSY. (1070591) TO REPLACE ONE SPRAY NOZZLE ASSY. (1002301) ONE PLACE PER CAVITY ON ALL STEALCRAFT ULTRA UNITS A) ONE COMPARTMENT UNITS ONE BREATHER ASSY. B1 TWO COMPARTMENT UNITS TWO BREATHER ASSY.
- 2.1 8° HOSE IS TO BE SECURED WITH MYLON CABLE TO THE HOSE OF THE SPRAY NOZZLE ASSY. DIRECTLY ABOVE THE NEW ASSY.
- 3.1 CHECK VALVE SIDE WHICH READS "VAC" MUST FACE DOWN TOWARD HOSE BARB
- 4.1 ITEM S IP/M 20199) AND ITEM B IP/M 1040481 TO BE ROTATED TO AN ANGLE THAT WILL MATCH THE OTHER SPRAY NOZILES OR MEET A MATING HOSE FITTING
- 5.) SEE INSTRUCTIONAL DRAWINGS 280ALB1-280ALB7 FOR INSTALLATION OF THIS ASSEMBLY INTO THE STEAMCRAFT ULTRA UNITS.

BEF. ~				
ner ~	14	1-	104048	FITTING, 1/2 HOSE X 1/4 MPT
	13	<u> </u>	20151	TIE, MYLON CABLE
<i>(</i> 8)	113		1043790500	
	11	<u> </u>	107032	CHECK VALVE, PLASTIC DIAPHRAGM
Δ		1	1043790300	HOSE, SILICONE 1/4 10 X 1/2 00 X 3
	9	3	104383	CLAMP, HOSE, MYLON
REF	8	•	05238	ELBOW, 1/4 X 90', BRASS
	7		14411	NIPPLE, 1/4 X 1.5', BRASS
	6		104381	FITTING, 1/4 HOSE X 1/4 MPT
	5	1	20199	TEE, 1/4 BRASS
ſ	4	-	104081	NUT, HEX JAM 5/8-18 BRASS
REF.	3	-	104232	WASHER, FLAT S/S
"c' .)	2	-	104082	GASKET, STEAM INJECTOR
(-	104009	FITTING ASSY., STEAM SUPPLY
-	ITEM	QTY.	PART NO.	DESCRIPTION
	TOLEN ILIEUTI M	(CD)	1333 E	LEVELAND RANGE INC.
	DECTAL		SCALE	DRAIN BY APPROVED BY
	± N/A		3/16=1	DUTCHMAN
	Mall	A	TITLE BREA	THERYSPRAY NOZZLE ASSY. 11/2" HOSE)
	± N/A	·		STEANCRAFT ULTRA 3, 5 & 10
	¢	,	DATE 09-15-94	DRAWING NO. C - 1070591 AEY.

THIS CESIGN DESCRIBES A PROPRIETARY LITEM AND IS THE PROPERTY OF CLEVELAND RANCE. THIS COMMING IS NOT TO BE COPIED ON USED WITHOUT THE APPROVAL OF CLEVELAND MARCE.

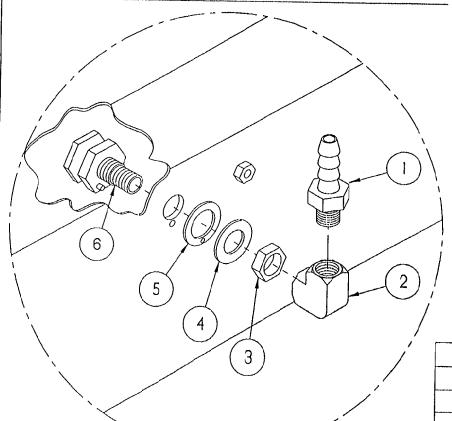

LET. REVISIONS DATE BY


TYPICAL APPLICATION

THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE.


	· · · · · · · · · · · · · · · · · · ·	T		
6	1	104009	FITTING, ASSY, STEAM SUPPLY	
5	1	104082	GASKET, STEAM INJECTOR	
4	1	104232	WASHER, FLAT S/S	
3	1	104081	NUT, JAM 5/8-18, BRASS	
2	1	05236	ELBOW, 1/4" X 90°, BRASS	
1	1	104048	FITTING, HOSE 1/2 H X 1/4 MPT	
ITEM	QTY.	PART NO.	DESCRIPTION	
TOLER/	\$ NOTED)	CLEVELAND RANGE INC. 1333 East 179th St. Cleveland. Ohio 44110-2574		
DECIMA ± . C	-	SCALE 1/2"	DRAWN BY APPROVED BY THOMPSON	
ANGULA		SPRAY NOZZLE ASSEMBLY STEAMCRAFT 3.1, 5.1 AND 10		
ЭK		DATE 02-12-93	DRAWING NO. A - 1062301 -	



1. SEE VIRING DIAGRAM 10/108 DR 10/165 FOR CONVIECTION LOCATION .

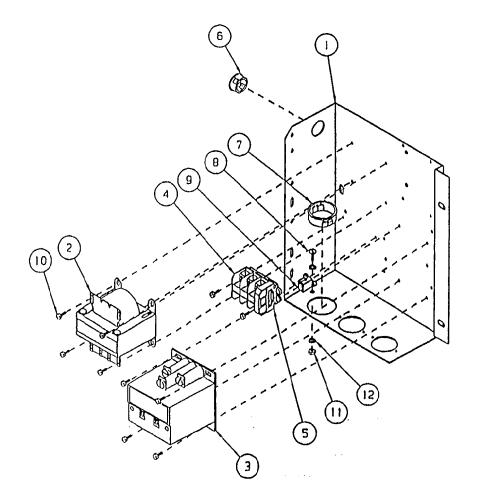


١.	ξĪ.	REVISIONS	DATE	BY
	A	101541 VAS 01Y, OF 1, 101540 VAS 01Y, OF 3, 104223 VAS 01Y, OF 14, ACCED 104225 & 1042251 PER E.O. # C-1876 R2	03-29-91	ር.የ
	В	DHITTED 104223 & 101336, ACCEO 108127, 15010 AND 18358, 103938 VAS 104092 PER E.D #C-2502	09-14-9)	Q.9
	C	P/H 108754 YAS 106127, REMOVED	01/14/91	Q,Y

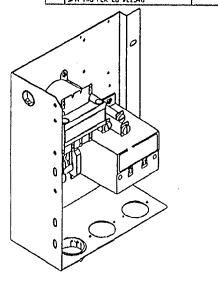

SEE V	14	2	1042251	WIRE ASSEMBLY	
NOTE I	13	3	104225	WIRE ASSEMBLY	
	12	2	\$311A	WASHER, INTERNAL TOOTH, #10 S/S	
			14659	NUT, HEX 10-24, S/S	
₹/₩	10	10	106754	SCREW, HEX/YASHER HEAD, 45 X 3/8	
	9.		\$0.30M	GROUND LUG, BURNOY MEPARE	
	8	1	101231	SCREW, 10-24 X INS TRUSS HEAD, SAS	
	7	1	102581	BUSHING, HEYCO, SHAP-IN	
	6	1	02600	BUSHING, HEYED SO-875-11. INSULATOR	
Δ	Ŝ	1	1015/10	ENO SEGMENT, TERMINAL BLOCK, BS AMP	
Δ	4	3	1015/1	TERMINAL SECHENT, CLAMP TYPE, 85 AMP	
	3		103905	CONTACTOR, 30 AMP, MER 3 PH	
		1	104234	CONTACTOR, 30 AMP, MER 1 PH	
	2	1	20533	TRANSPORER TS VA. 210/480 PRINCE, 120 SECONDET 1075	
<u>,0</u>	1	1	103936	PANEL, COMPONENT VELO ASSY.	
	ITEH	Oly.	PART NO.	DESCRIPTION	
	10.ERANCES UNITY A WITH DECTRUC A NVA ACALIR L NVA		CLEVELAND RANGE INC. 1333 East 179th St. Clevetand, Data 4110-2574		
			SCALE	ORANH BY APPROVED BY	
			_1/2	J.B.	
			TITLE	COMPONENT PANEL, H.L.	
				STEAHCRAFT 3.1	
			DATE	DRAVING NO.	
	C	ĸ	07-09-90	C ~ 104093 C	


THIS CESION CESCRIBES A PODPRIETARY HEN AND 15 THE PROPERTY OF CLEYELAND RUCE. THIS CRAVING IS 101 10 DE COPIED OF USED VITHOUT THE APPROVAL OF CLEYELAND RUCE.

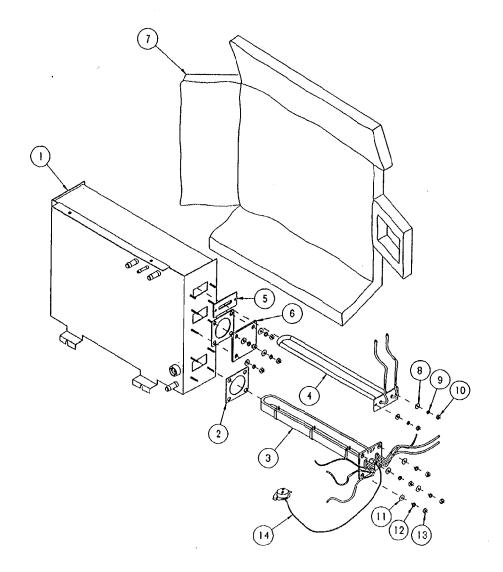



LET.	REVISIONS	DATE	BY
Á	CHANGED OTY, ON 23118, 23105, 14618 CHANGED PART NO. ON 18548, PER E.O. 1757	8-01-90	RA.
8	ACCED 16546 ; CHANGED 104308 ; E.O., C-1769	9-29-90	RA
C	07128 CHARGED TO CITY. 2, ACCED PAR FOR 104386, PER E.C. 1794	10-02-90	RR
D	PENDYED ITEMS, REVISED 104089 & 104091 PICTORIAL ; PER E.O. 1878	2-12-91	PO
E	ACCED HEATER 1. ELEBENT VARIATIONS AND ACCED PAN 103731 TO PARTS LIST, PAN 104091 PICTORIAL REVISED PER E.O. 4C-2277	01-12-93	PJO
F	PAN 105877 WAS 104091 PER E.O. 4C-2277 R3	02-02-93	PJO
G	RENDVED FLOAT ASSEMBLY (P/NS 105877 05231 & 104064) PER #C-2631	05-19-91	7.0


	,				
Æ	14	1 1		103731	CAPILLARY, HI LIMIT
Ą		8		14618	NUT, HEX, 1/4-20 S/S
A	12	8		23105	WASHER, LOCK, 1/4 S/S
Δ	11	8		23116	WASHER, FLAT 1/4 X 5/8
	10	2		14859	NUT. HEX. 10-24 S/S
	9	2		23113	WASHER, LOCK, SPLIT RING, CAD PLATED, \$10
	8	2		101855	WASHER, FLAT, 110 S/S
	7	1		104080	INSULATION, CUT, GENERATOR 3.1
Æ Æ.	6			16546	COVER PLATE
Δ	5	1		104388	GASKET, DRYING ELEMENTS
		-		1043084	ELEMENT, IMMERSION, 300W, 415 V
	i			1043083	ELEMENT, IMMERSION, 300W, 380 V
Δ Δ	1	-		1043082	ELEMENT, IMMERSION, 300W, 480 V
Æ\Æ\	4	-		1043061	ELEMENT, IMMERSION, 300W, 240 V
	ļ.	_		104308	ELEMENT, IMMERSION, 300W, 208 V
	ĺ	_		1038815	HEATER ASSY, 8 km, 380 V
A		-		1038814	HEATER ASSY, 8 kw. 480 V
Æ	3	-		1038812	HEATER ASSY, 8 kw. 415 V
		-		1038811	HEATER ASSY, 8 kw, 240 V
		-		103881	HEATER ASSY, 8 km, 208 V
Δ	2	2.		07128	GASKET
	1	1		104089	GENERATOR ASSY, WELD, SC 3.1 HL
	ITEM	QTY	. 1	PART NO.	DESCRIPTION
	TOLERANCES (EXCEPT A) HONO)			CL I 1333 Eas	EVELAND RANGE INC.
	DECIMAL				RAWN BY APPROVED BY
	± .030			1/4 = 11	RIOS
1	ANGULAR		111		GENERATOR ASSEMBLY
	±1°			\$	TEAMCRAFT 3.1, H.L.
	СК		80	TE 9-04-90	RAWING 10. С - 104090 ВЕУ. G


THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROFERTY OF CLEVELAND RANCE. THIS DRAWING IS NOT TO RE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANCE,

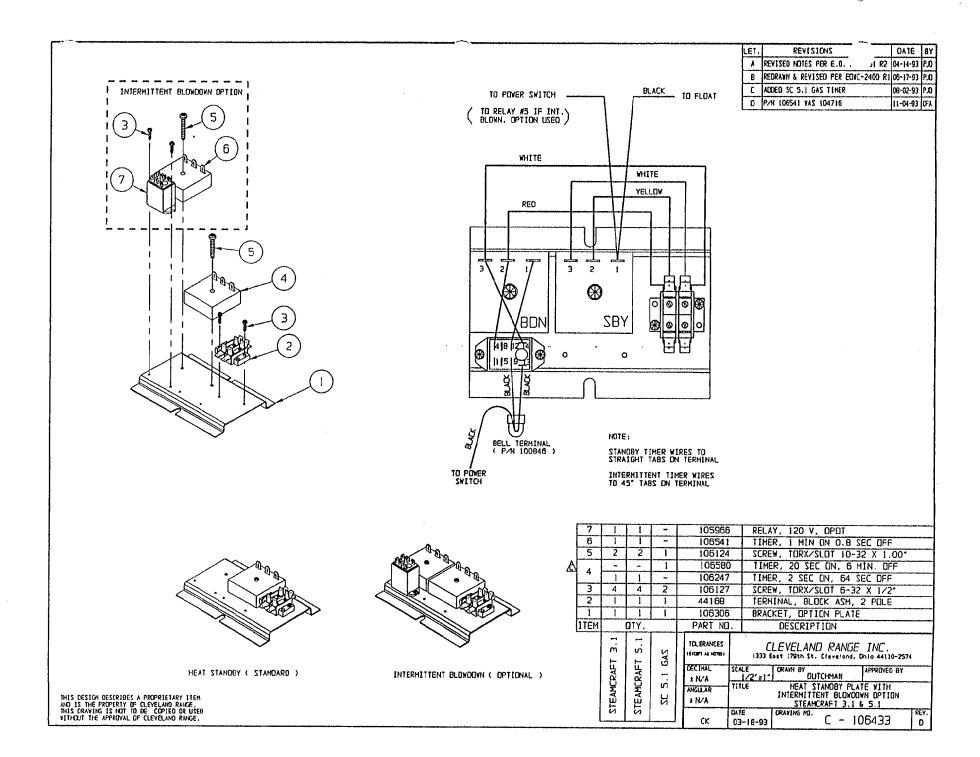

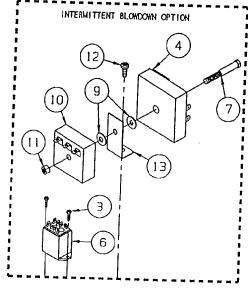


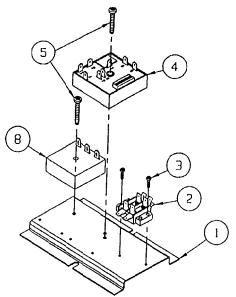







106433
INTERMITTENT BLOHDOWN (OPTIONAL)






1064331 HEAT STANDBY (STANDARD)



	,					
Æ	13	_		1059	5	BRACKET, DUAL TIMER MOUNTING
∠ €	12	-	I	10612	23	SCREW, TORX/SLOT \$10-32 X .500° LG
, , Æ	<u> </u>	-		14618		NUT, HEX 1/4-20, FULL FINISH
<u> </u>	10	-	1 1	10654	1	TIMER, I MIN. ON 0.8 SEC. OFF
Ę	9	<u> </u>	2	23116		WASHER, FLAT 1/4-20 S/S
Æ	8	11		10824	7	INTERVAL TIMER, 2 SEC. CN. 64 SEC. OFF
<u> </u>		-	1	10611	8	BOLT, 1/4-20 X 2-1/4, ZINC PLATED
	6	-	1	10596	6	RELAY, 120 V, DPDT
	5	2		10612	4 3	SCREW, TORX/SLOT \$10-32 X 1.00° LG.
\f\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	4	1	1	10891	1 7	TIMER, CLEAN LIGHT (DIP SWITCHES)
	3	2	4	10812	7 5	SCREW, TORX/SLOT #6-32 X .500° LG.
	2	1	1	44168	1	ERMINAL, BLOCK ASM, 2 POLE
	1	1	1	10830	3 E	BRACKET, OPTION PLATE
	ITEM		QTY.	PART N).	DESCRIPTION
		1064331 NT STANDBY	06433 BLOWDOWN	TOLERANCES IDDITA A HOTED	1;	CLEVELAND RANGE INC. 333 East 179th St. Cleveland, Ohta 44110-2574
		ST.	20	DECTIVAL 1 N/A	SCALE	=1 PRANN BY DUTCHMAN APPROVED BY
		HEAT	NT NT NT NT	AHQUAR ± N/A	TITLE	HEAT STANDBY PLATE WITH INTERMITTENT BLOWDOWN OPTION STEAMCRAFT ULTRA 3 & 5 ELEC.
······································	[l		СК	DATE 03-18-	DRAWING NO. TAEV

THIS DESIGN DESCRIBES A PROPRIETARY LITEM AND IS THE PROPERTY OF CLEYELAND RANGE. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEYELAND RANGE.

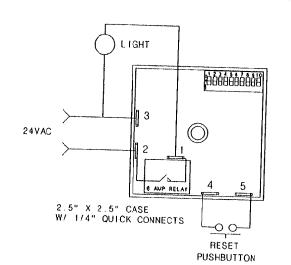

SWITCH # TIME AMOUNT 0.5 HR 2 = 1.0 HR 2.0 HR 4 -4.0 HR 5 * 8.0 HR 6 • 16.0 HR 32.0 HR 8 ≂ 64.0 HR 9 = 128.0 HR 10 - 256.0 HR

REVISIONS

DATE BY

LET.

SOURCE: AIROTRONICS 2747 RT. 20 E. BOX 326 CAZENOVIA, N.Y. 13035

TYPE: CR-2 TGCXB3511H5E2 INPUT: 24 VAC. 6 AMP DELAY: 5-511. 5 HR. ON-DLY COMBINE SWITCHES FOR TIME DELAY IN HOURS EXAMPLES:

37 HRS = SWITCH 7 + SWITCH 4 + SWITCH 2 250 HRS - SWITCH 9 + SWITCH 8 + SWITCH 7 + SWITCH 6 + SWITCH 5 + SWITCH 3


OPERATION:

SELECT DELAY VIA DIP SWITCH. APPLY 24VAC TO THE TIMER. AS THE SUPPLY VOLTAGE IS TURNED ON AND OFF TO THE TIMER THE TIMER WILL KEEP TRACK OF THE ELAPSED TIME THE SUPPLY VOLTAGE IS ON. ONCE THE TIMERS SUPPLY VOLTAGE HAS BEEN ON LONGER THAN THE SELECTED DELAY THE RELAY WILL TRANSFER. THIS IN TURN WILL TURN ON THE INDICATOR LIGHT. ONCE THIS HAS HAPPENED THE RESET BUTTON WILL BECOME ACTIVE AND ALLOW THE TIMER TO BE RESET.

ITEM OTY.	PART NO.	DESCRI	PTION
TOLERANCES (EXCEPT AS NOTED)	1333 East 17	EVELAND RA	ANGE INC
DECIMAL ± .030	SCALE =	DRAWN BY DUTCHMAN	APPROVED BY
ANGULAR ± 1°	TIMER, CLEAN LIGHT (DIP SWITCHES)		
CK	DATE 05-23-94	DRAWING NO. B -	106911 -


THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANGE. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANGE.

FOR ON/OFF SWIT > I TIMER



FROM: FLOAT (STANDARD)
GEN. STAND-BY TIMER (SBY OPTION)
BELL TERMINAL (TDS AND SBY OPTIONS TOGETHER)


FOR ELECTRICAL & 60 MINUTE MECHANICAL TIMERS




FROM: FLOAT (STANDARD GEN. STAND-BY T ER (SBY OPTION) BELL TERMINAL (i S AND SBY OPTIONS TOGETHER)


THIS DESIGN DESCRIBES A PROPRIETARY ITEM AND IS THE PROPERTY OF CLEVELAND RANCE. THIS DAWNING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF CLEVELAND RANCE.


 LET.	REVISIONS	DATE BY	
	WAS: HIGH LIMIT NOW: FLOAT PER E.O. IC-2361 RI	03-01-93	PJD
	2035 BLACK WAS FROM FLOAT ONLY PER EO IC-238 R2	D4-14-93	PJD

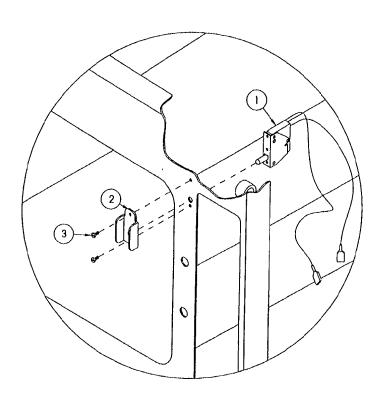

3	2	105449	SCREW, TRUSS HD. 6-32 X .312, S/
2	1	105442	GUARD, SWITCH PROTECTION
1		104702	SWITCH, CMPT. STEAM SHUT-OFF
ITEM	QTY.	PART NO.	DESCRIPTION
TOLER.	4 HOTED)	CLEVELAND RANGE INC. 1333 East 179th St. Cloveland, Onto 44110-2574	
DECIMAL ± .030		SCALE NTS	DRAWN BY DUTCHMAN APPROVED BY
# 1 '	or Eran cor or or or or		
a	〈	DATE 02-03-93	DRAWING NO. C - 10635 F B

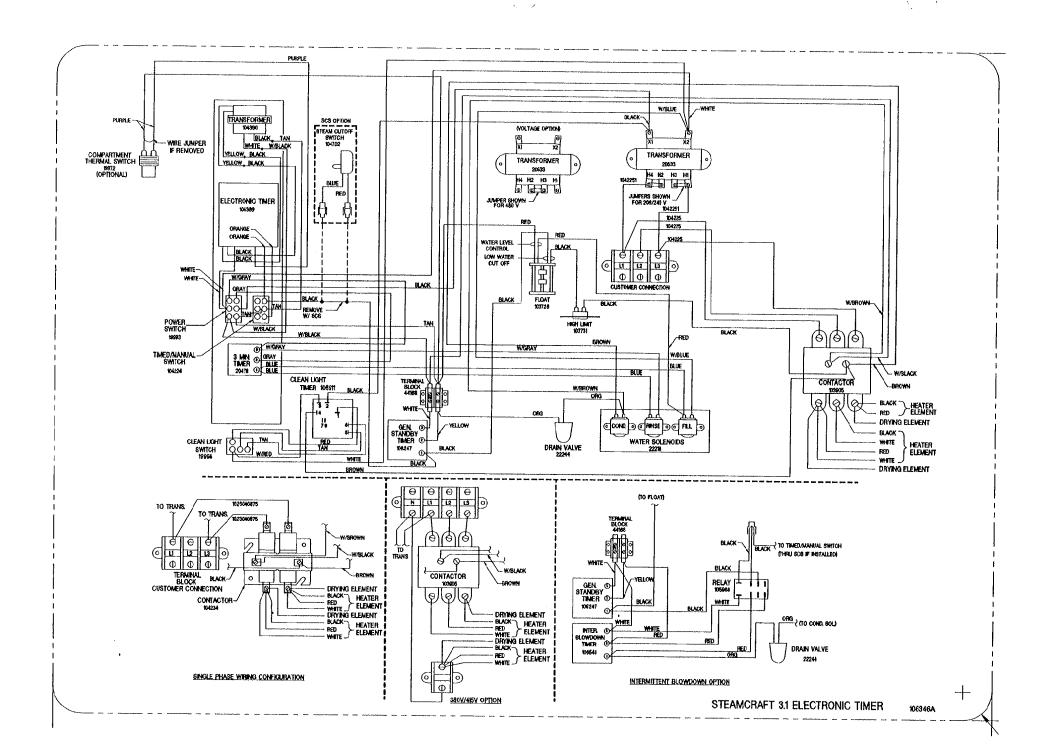

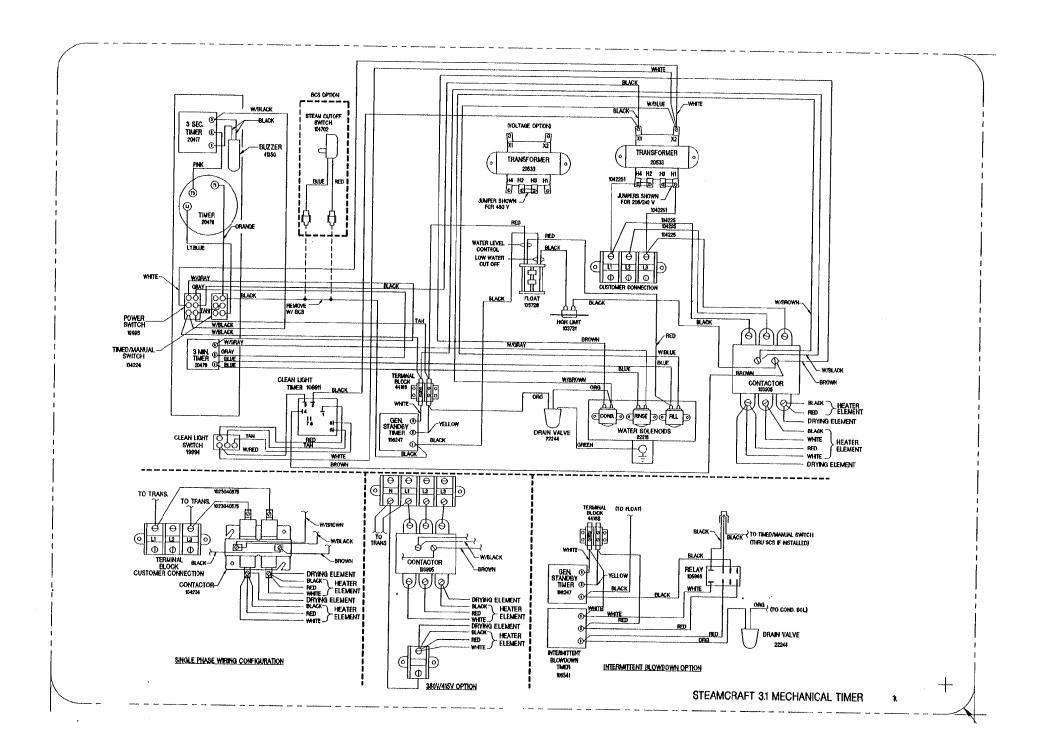

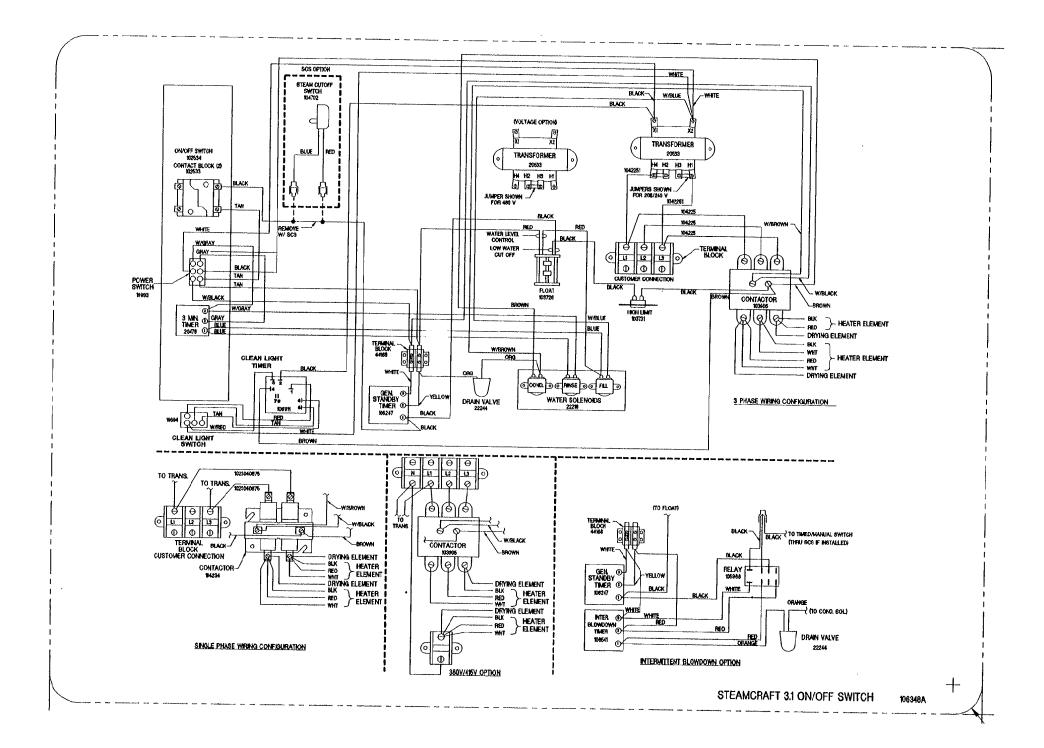



CLEVELAND RANGE 21CET8 SEQUENCE OF OPERATIONS

Mechanical Timer

- 1. Supply power is sent to the primary of the main transformer.
 - 115 VAC is sent from the secondary of the main transformer to the on/off rocker,
- 2. To turn the unit on, depress the red on/off rocker switch.
 - 115 VAC is sent to the red power light.
 - 115 VAC is sent to normally open drain valve closing it.
 - 115 VAC is sent to H and N on the water level board
- 3. With the water level board energized and no water in the generator
 - 5 seconds later 115 VAC is sent from the FILL terminal to the fill solenoid.
 - The fill solenoid opens and the generator fills through the drain valve.
 - The water fills to the low probe shorting it to ground
 - 115 VAC is sent to the heat standby timer which will energize 3 seconds every 4 minutes to maintain heat while unit is idle
 - 115 VAC is sent from the HEAT terminal to the timed manual switch.
- 4. When the timed/manual switch is in the timed position and time is on the timer
 - 115 VAC is sent from the timer to the R2 relay coil
 - R2 relay energizes closing the R2A and R2B contacts
 - 115VAC is sent through the now closed R2B contacts to the timer motor
 - 115 VAC is sent through the now closed R2A contacts through the door switch to the normally closed contacts of the high limit switch.
 - 115 VAC is then sent through the high limit to the coil of condensate solenoid
 - The condensate solenoid opens spraying cold water down the compartment drain.
 - 115 VAC is also sent through the high limit to the coil of the contactor.
 - 115 VAC is sent to the clean light timer.
 - When the clean light timer times down 115 VAC is sent to the clean light switch.
 - When the clean light switch is depressed the clean light timer is reset.
- 5. When the contactor coil is energized supply voltage is sent to both of the elements.
 - The elements are energized and the water is heated to steam.
 - Steam is directed to the cooking compartment.
- 6. When the timer times out
 - 115 VAC is sent to the 3 second timer and then to the buzzer for 3 seconds.
 - 115 VAC is removed from the R2 relay.
 - R2A contacts open de energizing the heat circuit
 - R22B relay contacts open removing the 115 VAC from the timer motor

- 7. When the water level reaches the high probe then 115 VAC is removed from the FILL terminal and the fill solenoid is turned off.
- 8. After the water level drops below the high probe for 5 seconds 115 VAC is sent to the FILL terminal again.
- 9. The red on/off switch is depressed and the unit is turned off.
 - 115 VAC is removed from the heat and timer circuit.
 - 115 VAC is removed from the normally open drain valve allowing the steamer to drain.
 - 115 VAC is sent to the 3-minute timer and the fill solenoid is energized for 3 minutes flushing the drain.

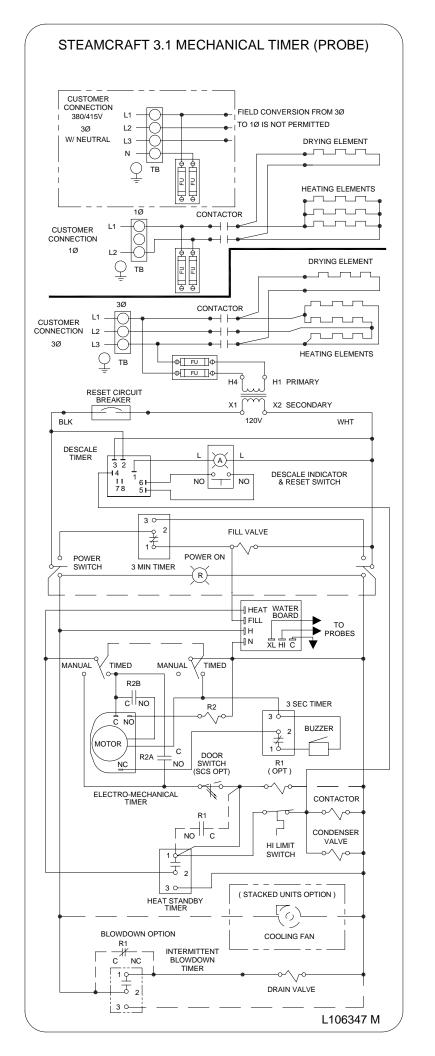

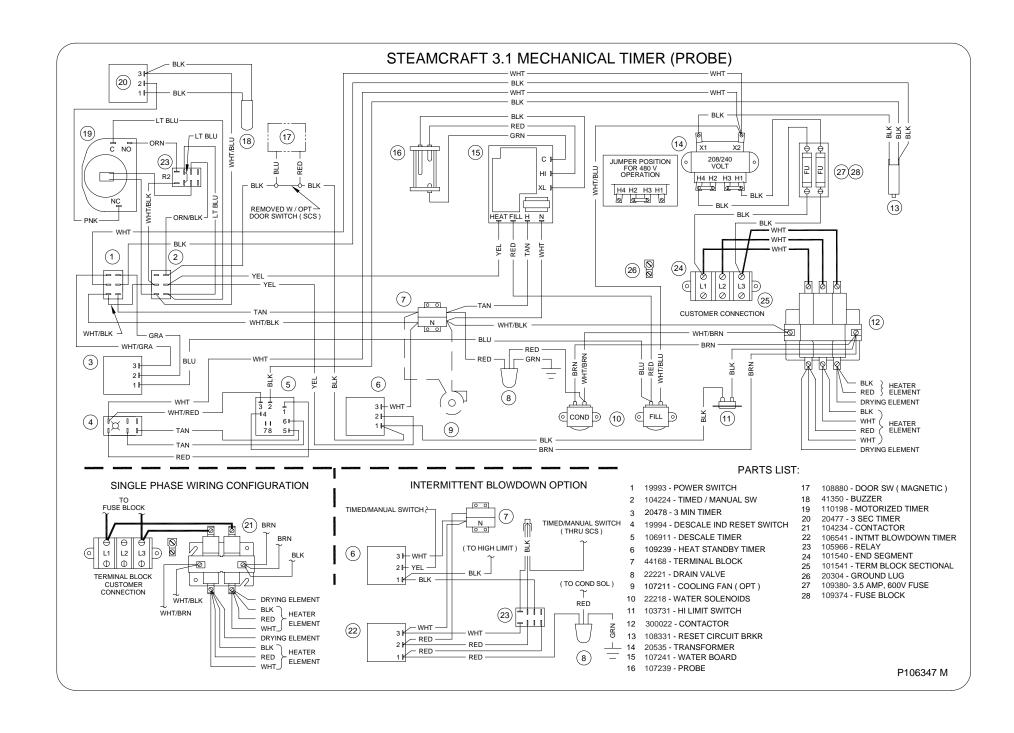


CLEVELAND RANGE 21CET8 SEQUENCE OF OPERATIONS

Electronic Timer


- 1. Supply power is sent to the primary of the main transformer.
 - 115 VAC is sent from the secondary of the main transformer to the on/off rocker
- 2. To turn the unit on, depress the red on/off rocker switch.
 - 115 VAC is sent to the red indicator light.
 - 115 VAC is sent to normally open drain valve closing it.
 - 115 VAC is sent to H and N on the water level board
 - 115 VAC is sent to the 24VAC transformer for the electronic timer.
 - 115 VAC is sent to the normally open compartment thermostat switch.
- 3. With the water level board energized and no water in the generator
 - After a 5 second delay, 115 VAC is sent from the FILL terminal to the fill solenoid.
 - The fill solenoid opens and the generator fills through the drain valve.
 - The water fills to the low probe shorting it to ground
 - 115 VAC is sent from the HEAT terminal to the timed manual switch.
 - 115 VAC is sent to the heat standby timer which will energize 3 seconds every 4 minutes to maintain heat while unit is idle
- 4. When the timed/manual switch is in the timed position and time is on the timer
 - 115 VAC is sent from the timer through the optional door switch to the normally closed contacts of the high limit
 - 115 VAC is then sent through the high limit to the coil of condensate solenoid and the coil of the contactor.
 - 115 VAC is sent to the clean light timer.
 - When the clean light timer times down 115 VAC is sent to the clean light switch.
 - When the clean light switch is depressed the clean light timer is reset.
- 5. When the contactor is energized supply voltage is sent to both the Steam and Drying elements.
 - Steam is energized and sent to the cooking compartment.
 - When the cooking compartment reaches 193 degrees the compartment thermostat closes sending 115 VAC to the timer.
 - The timer will then begin counting down.
 - When the timer times down a buzzer will sound and the timer will open removing 115 VAC from the heat circuit.
- 6. When the water level reaches the high probe 115 VAC is removed form the FILL terminal and the fill solenoid is turned off.

- 7. After the water level drops below the high probe for 5 seconds 115 VAC is sent to the FILL terminal again.
- 8. The red on/off switch is depressed and the unit is turned off.
 - 115 VAC is removed from the timer and heat circuits.
 - 115 VAC is removed from the normally open drain valve allowing the steamer to drain.
 - 115 VAC is sent to the 3 minute timer and the fill solenoid is energized for 3 minutes flushing the drain.

STEAMCRAFT 3.1 ELECTRONIC TIMER (PROBE)

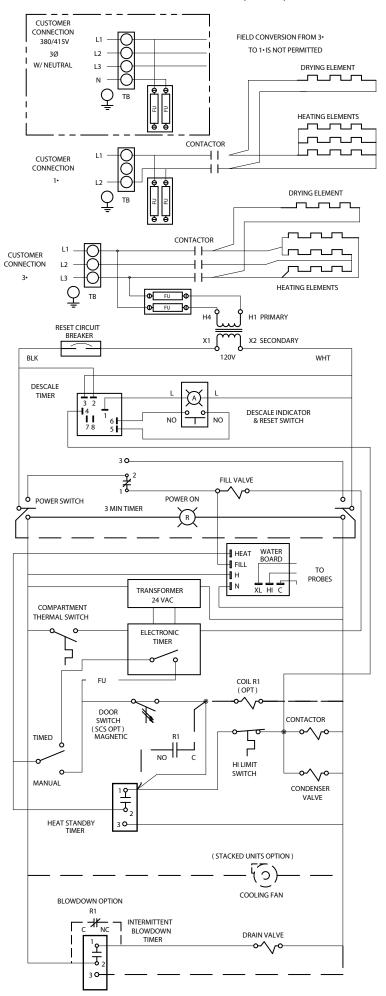

STEAMCRAFT 3.1 ELECTRONIC TIMER (PROBE)

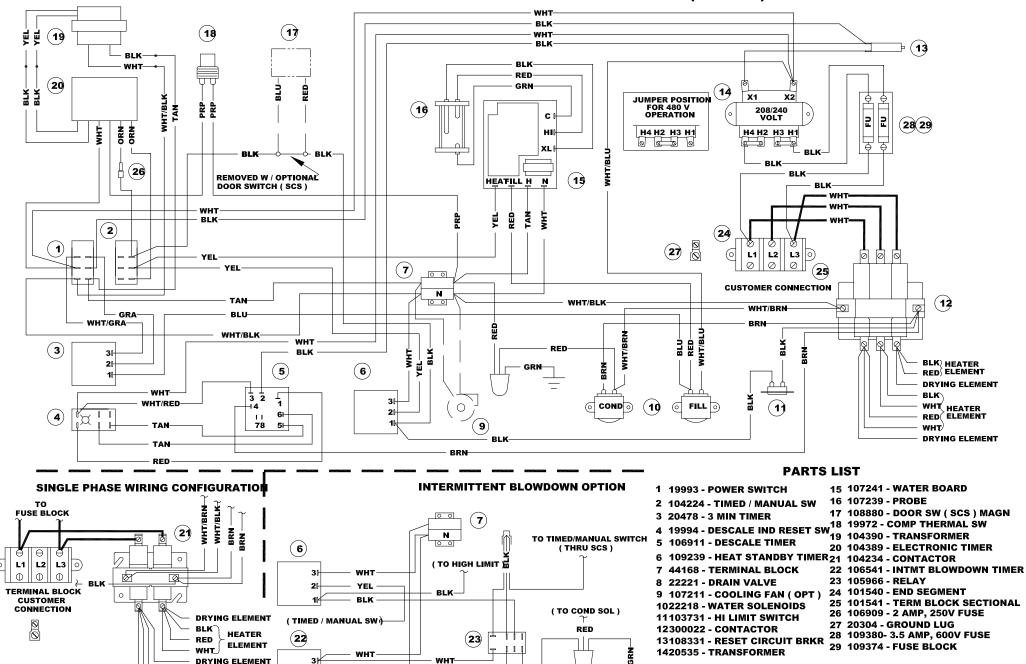

8

RED

RED-

RED

RED.


BLK⁻


RED

WHT


HEATER

ELEMENT

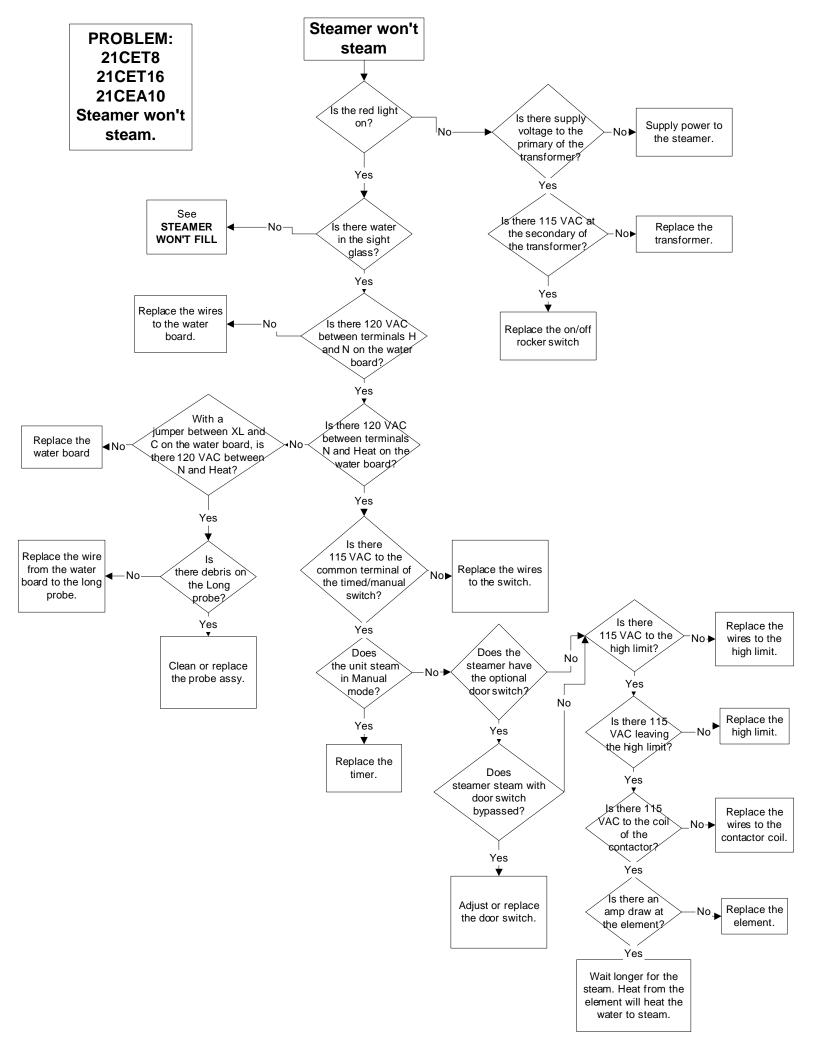


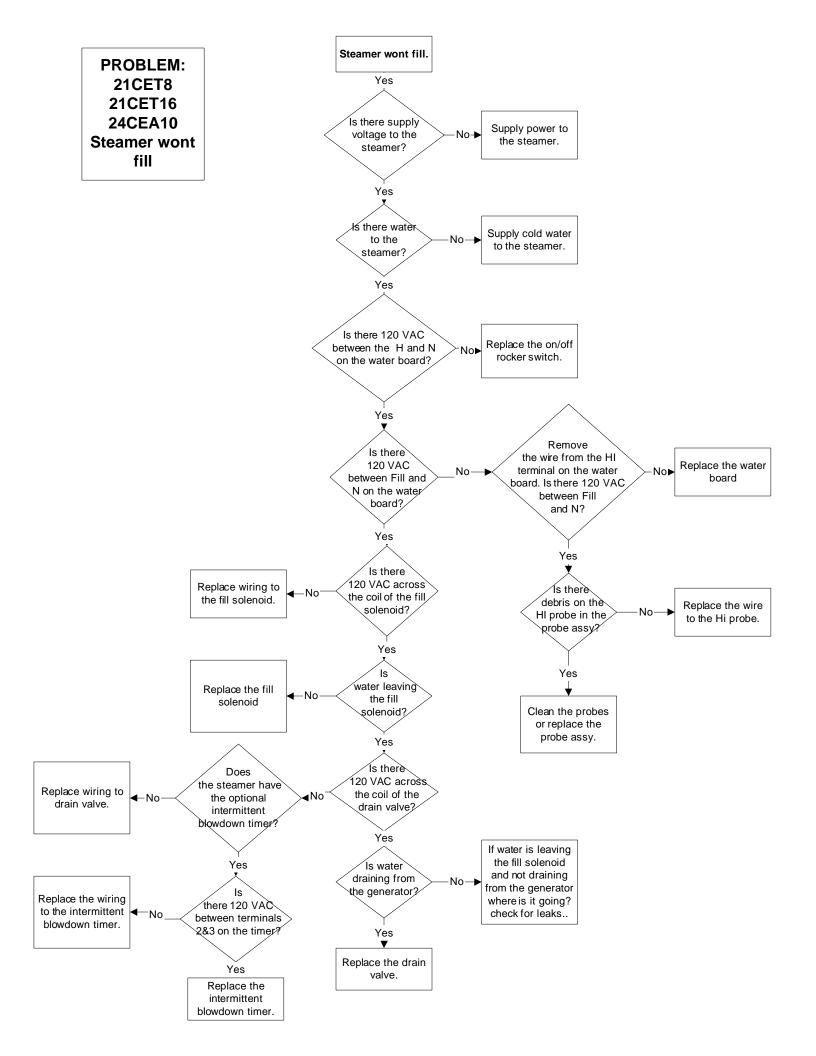



PROBLEM: 21CET8, 21CET16, 24CEA10 Electronic timer displays "PAUS" and won't count down

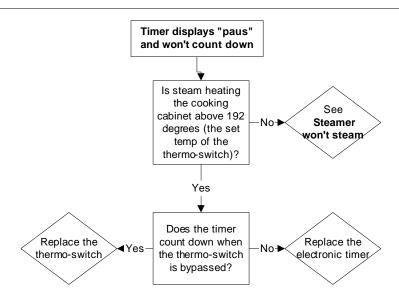



PROBLEM: 21CET8, 21CET16, 24CEA10 Steam leaks around the door.

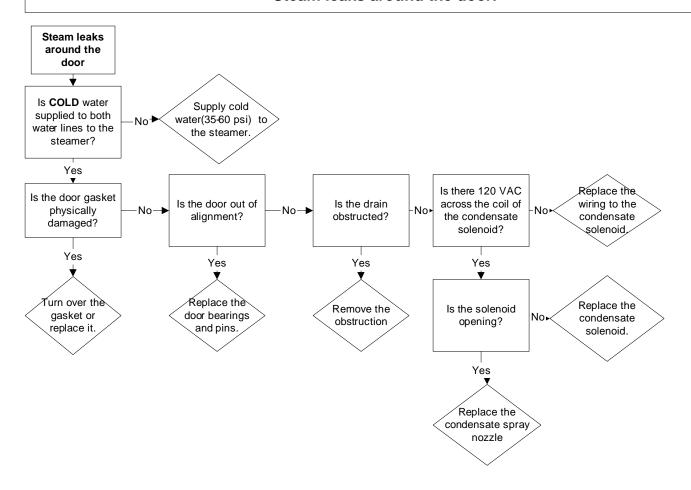

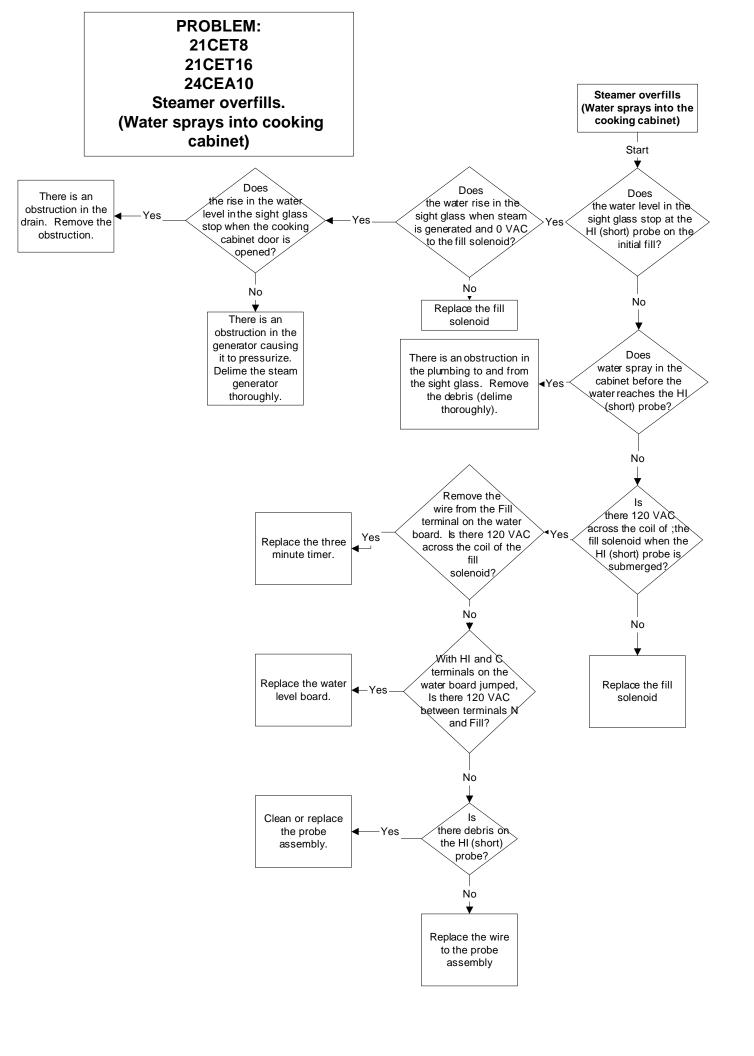


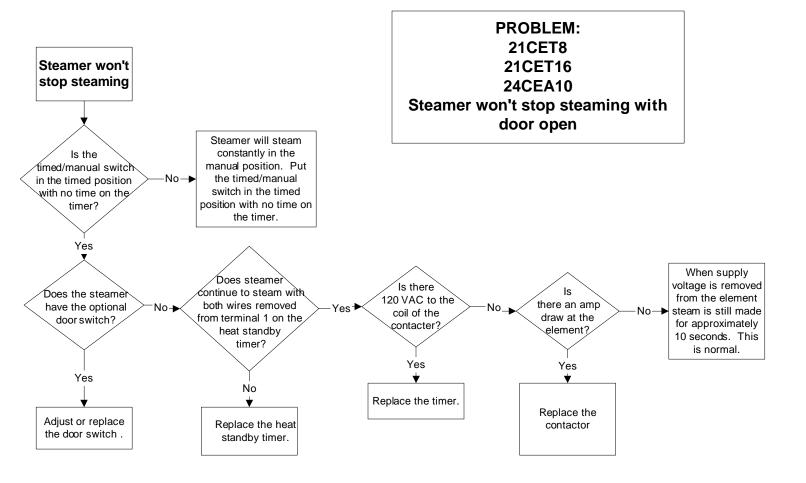





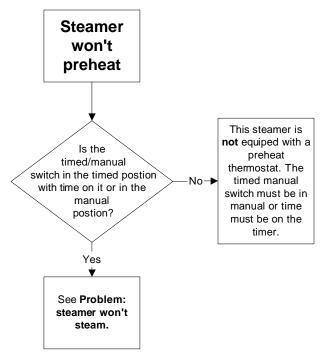



Problem: 21CET16 Steamer won't preheat

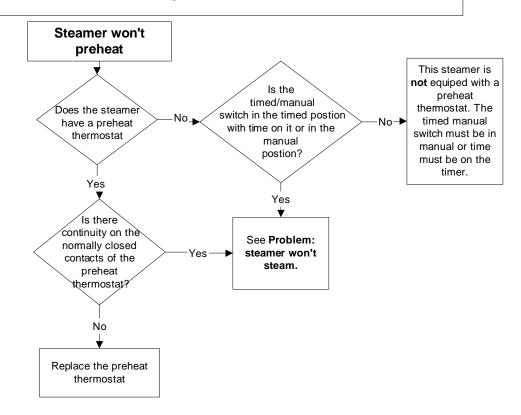

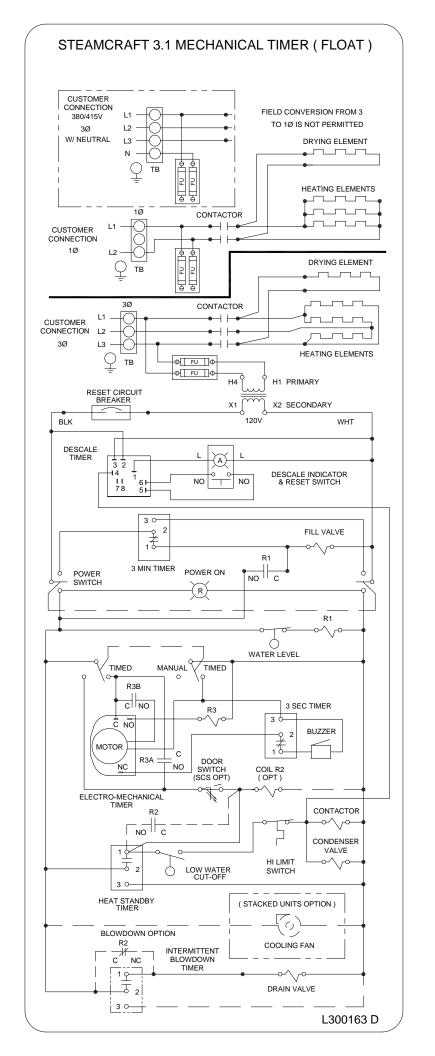


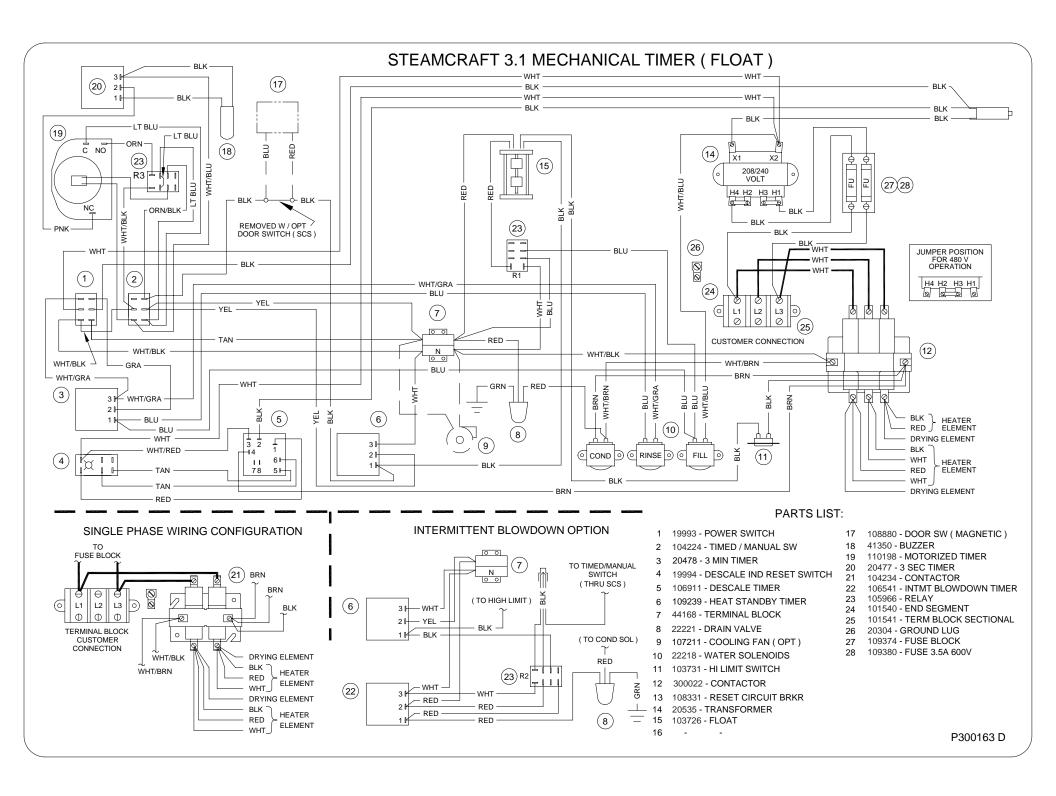


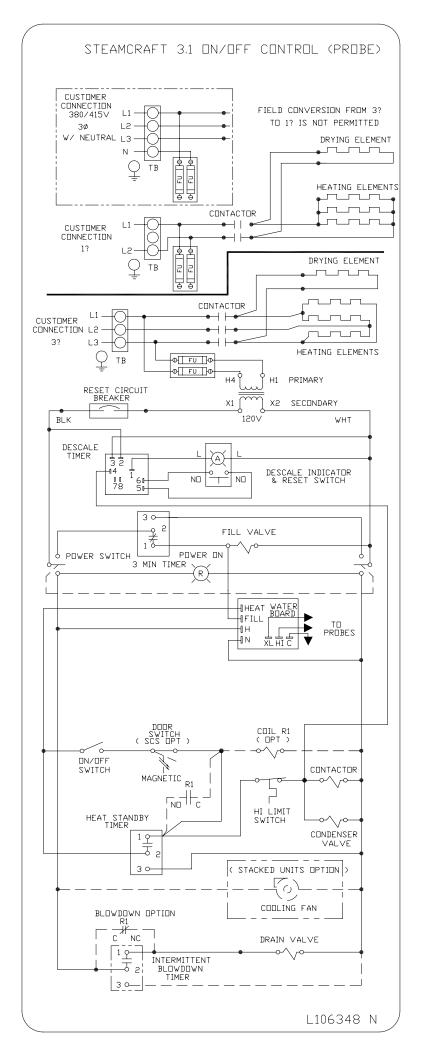

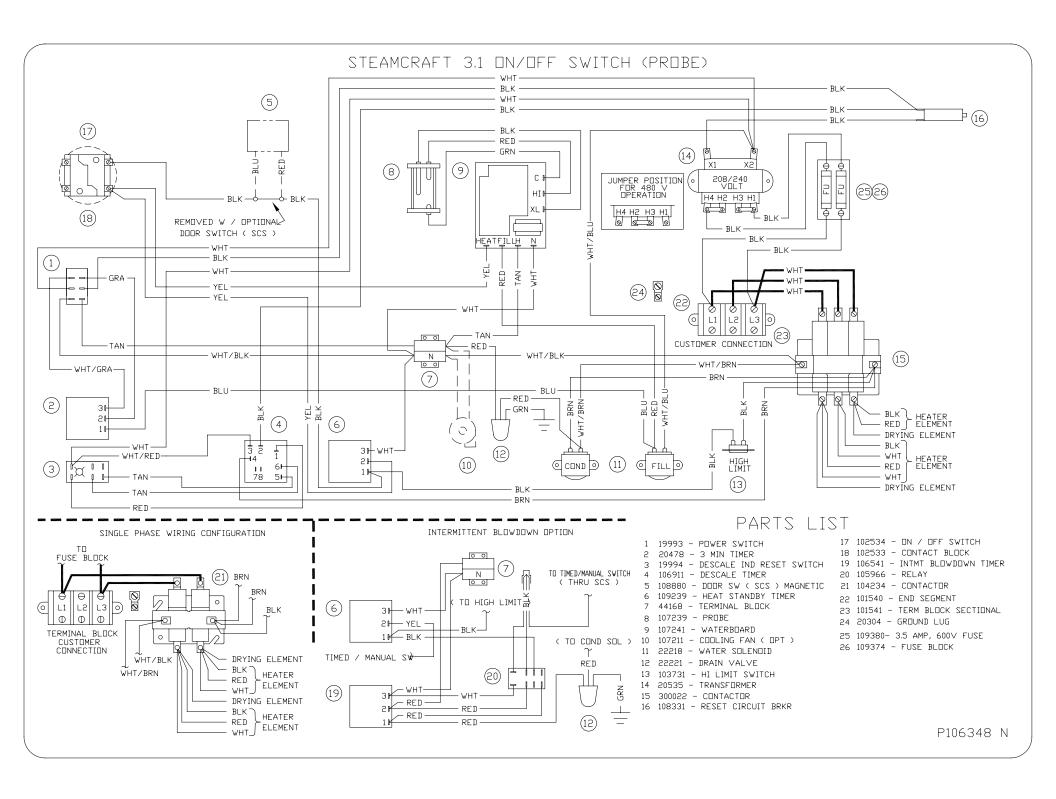


STEAMCRAFT 3.1 / 5.1 MECHANICAL TIMER (PROBE)

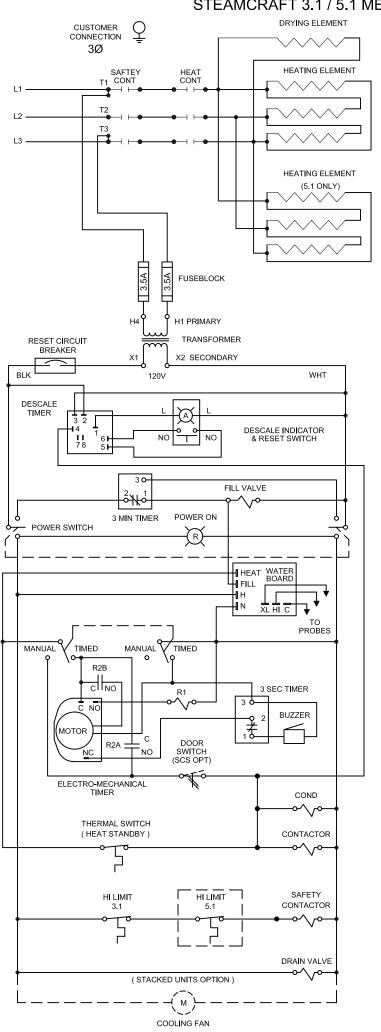

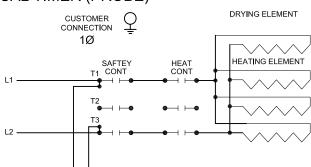

STEAMCRAFT 3.1 / 5.1 MECHANICAL TIMER (PROBE) CUSTOMER CONNECT AT SAFETY CONTACTOR T1,2 & 3 FOR 3 Ø FOR 1 Ø (3.1 ÓNLY) SEE SHEET 2

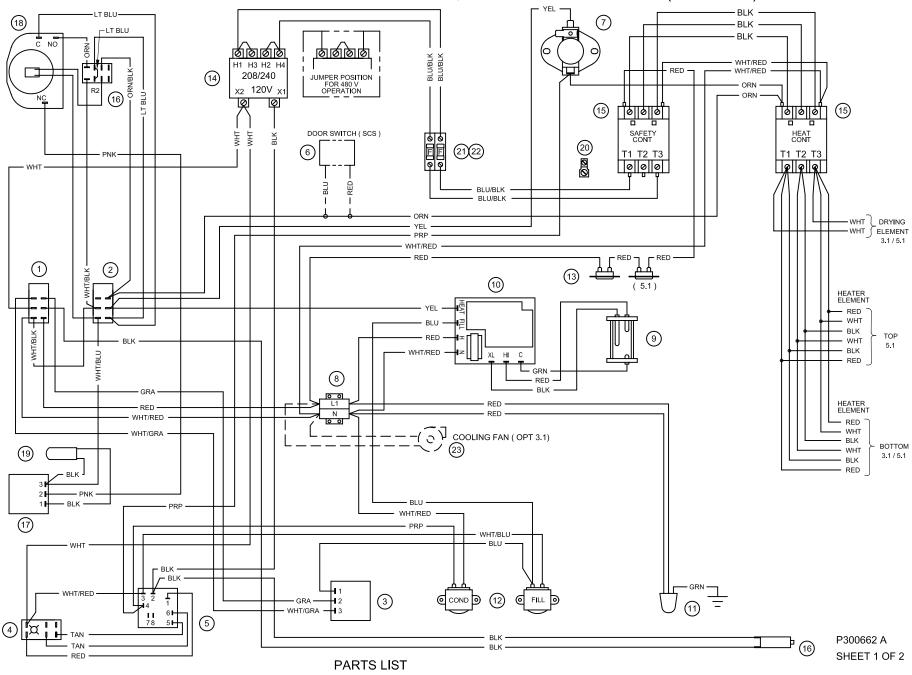

- 19993 POWER SWITCH
- 104224 TIMED/MANUAL SWITCH
- 20478 3 MIN TIMER
- 19994 DESCALE INDICATOR RESET SW
- 106911 DESCALE TIMER

- 108880 DOOR SW (MAGNETIC)
- 105789 THERMAL SWITCH (HSB)
- 44168 TERMINAL BLOCK
- 107239 PROBE
- 10 107241 WATER BOARD
- 11 22221 DRAIN VALVE
- 22218 WATER SOLENOIDS 12
- 103731 HI LIMIT SWITCHES
- 20535 TRANSFORMER 03509 - CONTACTORS


15


- 105966 RELAY
- 20477 3 SEC TIMER
- 110198 MOTORIZED TIMER

20304 - GROUND LUG


- 41350 BUZZER
- 109374 FUSE BLOCK
- 109380 FUSE, 3.5A
- 107211 COOLIN FAN (OPT 3.1)

STEAMCRAFT 3.1 / 5.1 ELECTRONIC TIMER (PROBE)

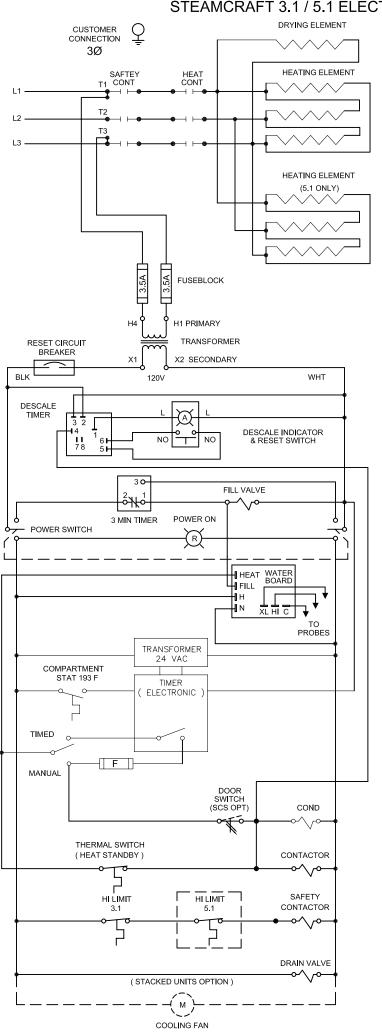

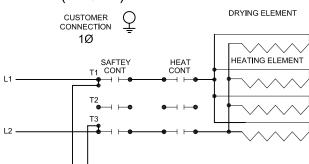

STEAMCRAFT 3.1 / 5.1 ELECTRONIC TIMER (PROBE) CUSTOMER CONNECT AT SAFETY CONTACTOR T1,2 & 3 FOR 3 Ø FOR 1 Ø (3.1 O FOR 1 Ø (3.1 ÓNLY) SEE SHEET 2

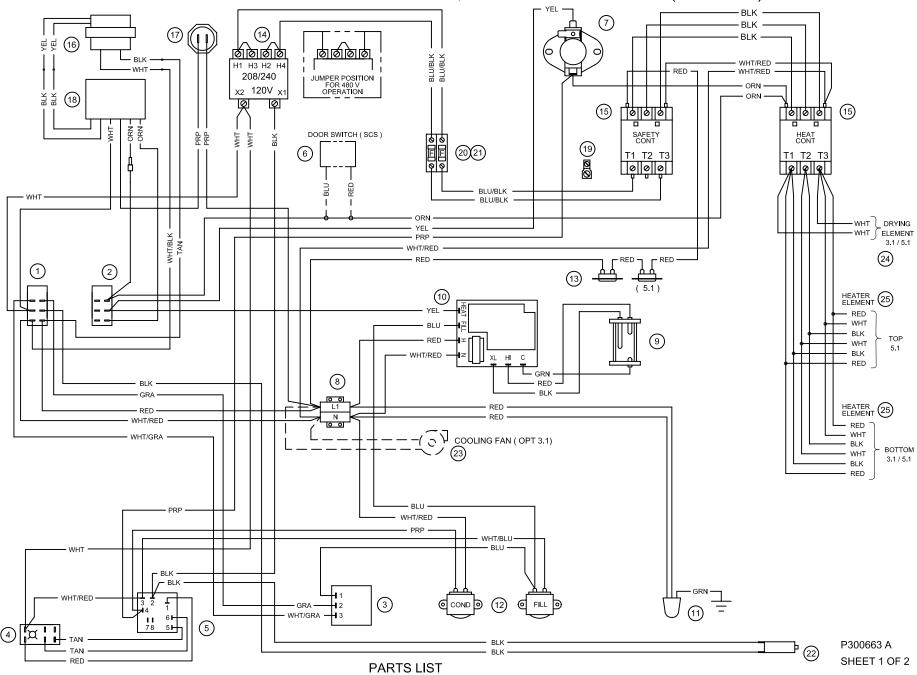


- 19993 POWER SWITCH
- 104224 TIMED/MANUAL SWITCH
- 20478 3 MIN TIMER
- 19994 DESCALE INDICATOR RESET SW
- 106911 DESCALE TIMER


- 108880 DOOR SW (MAGNETIC)
- 105789 THERMAL SWITCH (HSB)
- 44168 TERMINAL BLOCK
- 107239 PROBE
- 107241 WATER BOARD
- 22221 DRAIN VALVE
- 22218 WATER SOLENOIDS
- 103731 HI LIMIT SWITCHES
- 20535 TRANSFORMER
 - 03509 CONTACTORS
- 104390 TRANSFORMER
- 19972 COMP THERMAL SW
- 104389 ELECTRONIC TIMER

109374 - FUSE BLOCK

- 20304 GROUND LUG
- 109380 FUSE, 3.5A
- 108331 RESET CIRCUIT BREAKER
- 107211 COOLIN FAN (OPT 3.1)

STEAMCRAFT 3.1 / 5.1 MECHANICAL TIMER (FLOAT)

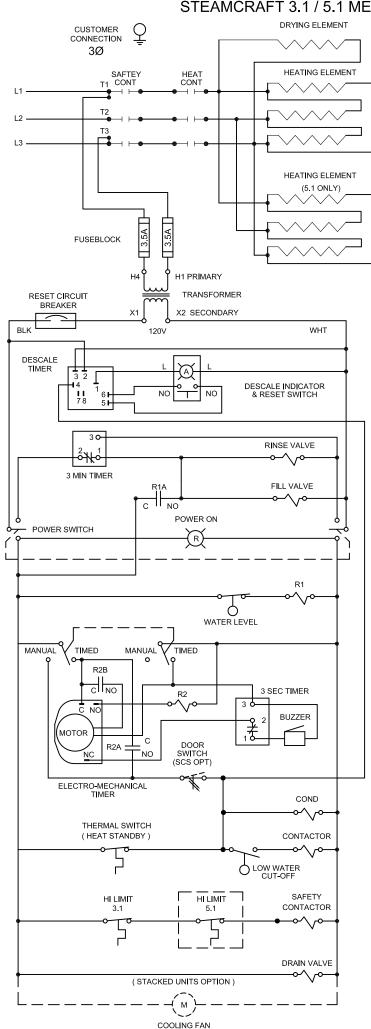


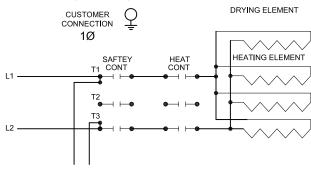

PARTS LIST

- 1 19993 POWER SWITCH
- 2 104224 TIMED/MANUAL SWITCH
- 3 20478 3 MIN TIMER
- 4 19994 DESCALE INDICATOR RESET SW
- 5 106911 DESCALE TIMER
- 6 108880 DOOR SW (MAGNETIC)
- 7 105789 THERMAL SWITCH (HSB)
- 8 44168 TERMINAL BLOCK
- 9 103726 FLOAT
- 10 20304 GROUND LUG
- 11 22221 DRAIN VALVE
- 12 22218 WATER SOLENOIDS
- 13 103731 HI LIMIT SWITCHES
- 14 20535 TRANSFORMER
- 15 03509 CONTACTORS
- 16 105966 RELAY
- 17 20477 3 SEC TIMER
- 18 110198 MOTORIZED TIMER
- 19 41350 BUZZER
- 20 109374 FUSE BLOCK
- 21 109380 FUSE, 3.5A
- 22 108331 RESET CIRCUIT BREAKER
- 23 107211 COOLIN FAN (OPT 3.1)

STEAMCRAFT 3.1 / 5.1 MECHANICAL TIMER (FLOAT) CUSTOMER CONNECT AT SAFETY CONTACTOR T1,2 & 3 FOR 3 Ø FOR 1 Ø (3.1 ONLY) SEE SHEET 2

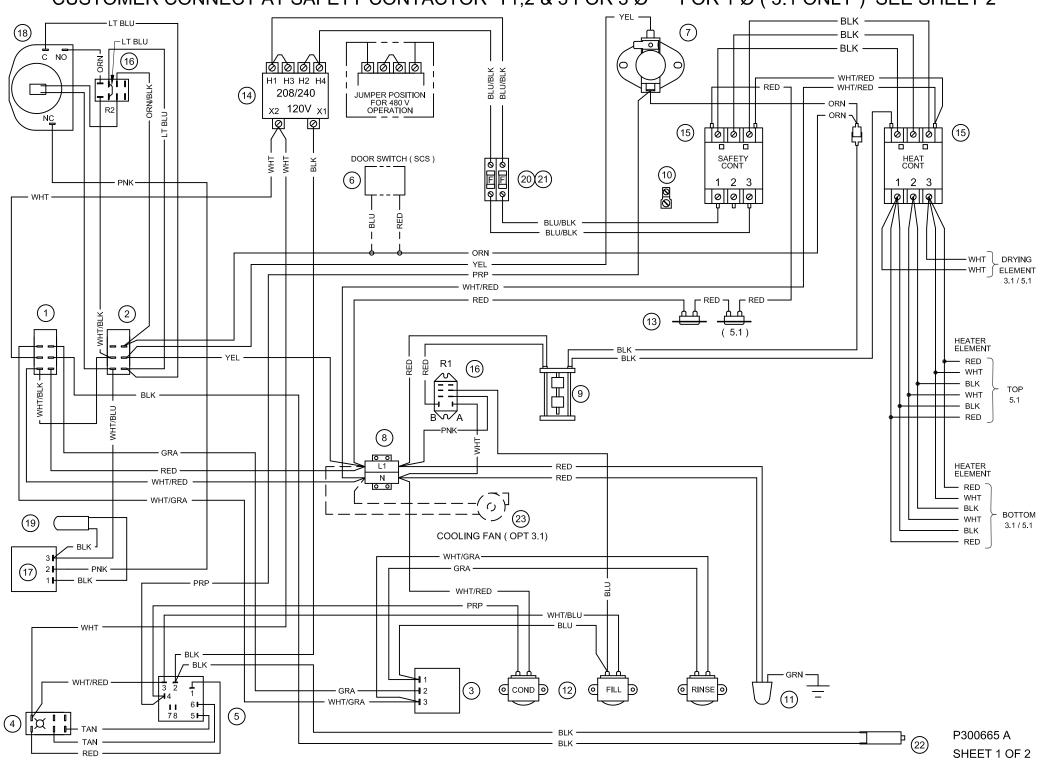



Descaling Procedure-SteamCraft Ultra and Gemini Series

How Much DISSOLVE to Use				
Model	Dissolve			
Ultra 3	1/2 Gallon			
Ultra 5	1 Gallon			
Ultra 10 (Elec.)	1 Gallon (ea.)			
Ultra 10 (Gas)	1½ Gallon			
Gemini 6 & 10	1 Gallon (ea.)			

1. Turn the unit OFF and open the doors:

This will drain and rinse the generator for about 3 minutes.

2. Turn the unit power back On:

The generator will begin to refill with water.

3. Select Timed with the Timed/Manual switch:

DO NOT start the timer, since you do not want to heat the water during descaling. Leave the doors open.

4. Remove descaling port cap and add with the specified amount of DISSLOVE: (See chart above)


Do this while the unit is refilling. The generators can take-up to 8 minutes to refill.

 After refill has stopped, add extra tap water into the descaling port until liquid is seen entering the cooking cabinet. Note: Ultra 10 gas will have liquid coming out of the drain,

Adding extra water when descaling will raise the descaling solution higher than the normal fill level, allowing the DISSOLVE to work on sensors and surfaces above the water line

Note: Some SteamCraft Ultra models (the electric powered Ultra 10 and Gemini 6 and 10, for example) have two generators and two descaling ports. Both units should be descaled at the same time, using this procedure

- 6. Let the descaler soak in generator for approximately one hour:
- After one hour, turn the unit power
 Off: This will drain and rinse the generator for about 3 minutes.

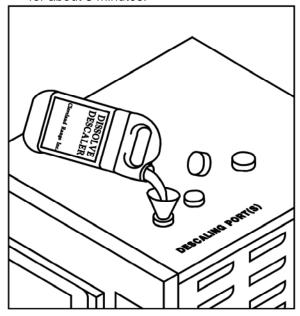

- 8. After the 3-minute drain cycle completes, turn the unit back ON. After the filling has stopped, add water until liquid enters the cooking compartment (or drain for the ultra 10 gas), and then turn the unit OFF. This will drain and flush any residue from the water level control assembly. Replace descaling cap.
- After the 3 minute drain cycle completes, Turn the unit ON and set the Timer for 20 minutes: Make sure the Time/Manual switch is in the timed setting and the doors are closed.
- 10. When the timer times out (after 20 minutes) turn the power Off:

This will drain and rinse the generator for about 3 minutes.

This ends the descaling procedure. You can now turn the unit back on and resume normal startup and cooking operations.