

www.hatcocorp.com


Register Online!
(see page 2)



Mini Display Warmer MDW Series

Installation and Operating Manual

P/N 07.04.405.00

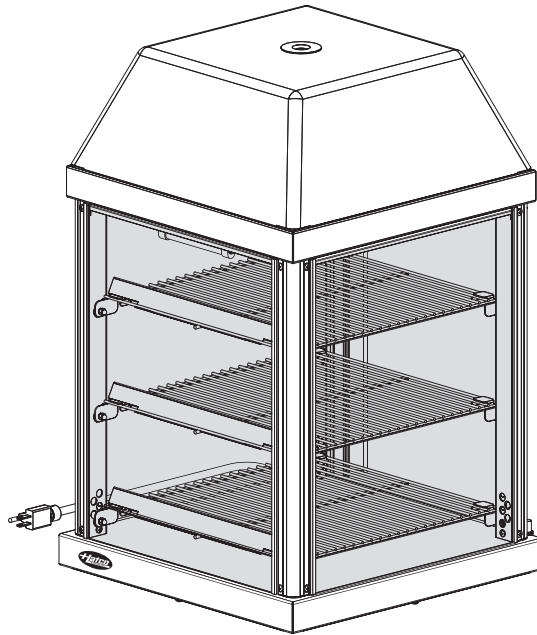

⚠ WARNING

Do not operate this equipment unless you have read and understood the contents of this manual! Failure to follow the instructions contained in this manual may result in serious injury or death. This manual contains important safety information concerning the maintenance, use, and operation of this product. If you're unable to understand the contents of this manual, please bring it to the attention of your supervisor. Keep this manual in a safe location for future reference.

⚠ ADVERTENCIA

No opere este equipo al menos que haya leído y comprendido el contenido de este manual! Cualquier falla en el seguimiento de las instrucciones contenidas en este manual puede resultar en un serio lesión o muerte. Este manual contiene importante información sobre seguridad concerniente al mantenimiento, uso y operación de este producto. Si usted no puede entender el contenido de este manual por favor pregunte a su supervisor. Almacenar este manual en una localización segura para la referencia futura.

⚠ AVERTISSEMENT

Ne pas utiliser cet équipement sans avoir lu et compris le contenu de ce manuel ! Le non-respect des instructions contenues dans ce manuel peut entraîner de graves blessures ou la mort. Ce manuel contient des informations importantes concernant l'entretien, l'utilisation et le fonctionnement de ce produit. Si vous ne comprenez pas le contenu de ce manuel, veuillez le signaler à votre supérieur. Conservez ce manuel dans un endroit sûr pour pouvoir vous y référer plus tard.

CONTENTS

Important Owner Information	2	Operation	8
Introduction	2	General	8
Important Safety Information	3	Maintenance	9
Model Description	4	General	9
Model Designation	4	Cleaning	9
Specifications	5	Display Light Bulb Replacement	10
Plug Configurations.....	5	Troubleshooting Guide	11
Electrical Rating Chart	5	Options and Accessories	12
Dimensions	5	Limited Warranty	13
Installation	6	Authorized Parts Distributors	Back Cover
General	6		
Reversible Access Door.....	7		
Configurable Access Door	7		

IMPORTANT OWNER INFORMATION

Record the model number, serial number, voltage, and purchase date of the unit in the spaces below (specification label located on the side of the unit near the power cord). Please have this information available when calling Hatco for service assistance.

Model No. _____

Serial No. _____

Voltage _____

Date of Purchase _____

Register your unit!

Completing online warranty registration will prevent delay in obtaining warranty coverage. Access the Hatco website at www.hatcocorp.com, select the *Parts & Service* pull-down menu, and click on "Warranty Registration".

Business Hours: 8:00 AM to 5:00 PM
Central Standard Time (C.S.T.)
(Summer Hours: June to September –
8:00 AM to 5:00 PM C.S.T.
Monday through Thursday
8:00 AM to 2:30 PM C.S.T. Friday)

Telephone: (800) 558-0607; (414) 671-6350

E-mail: partsandservice@hatcocorp.com

Fax: (800) 690-2966 (Parts and Service)
(414) 671-3976 (International)



24 Hour 7 Day Parts and Service Assistance available in the United States and Canada by calling (800) 558-0607.

Additional information can be found by visiting our web site at www.hatcocorp.com.

INTRODUCTION

The Hatco Mini Display Warmer is designed to hold prepared foods for prolonged periods of time while maintaining that "just-made" quality. Mini Display Warmer cabinets provide the best environment for products like sandwiches, cookies, pretzels, muffins, and desserts by regulating the air temperature.

The Mini Display Warmer's air flow pattern is designed to maintain consistent cabinet temperature. The heat sources create a "blanket" effect around the food. The air flow rate enables the cabinet to rapidly recover temperature after opening and closing the door. Configurable access doors and magnetic adjustable shelves make the Hatco Mini Display Warmer perfect for any food service application.

The Mini Display Warmer is a product of extensive research and field testing. The materials used were selected for maximum durability, attractive appearance, and optimum performance. Every unit is inspected and tested thoroughly prior to shipment.

This manual provides installation, safety, and operating information for the Mini Display Warmer. Hatco recommends all installation, operating, and safety information appearing in this manual be read prior to installation or operation of a unit.

Safety information that appears in this manual is identified by the following signal word panels:



WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.



CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.



NOTICE is used to address practices not related to personal injury.

IMPORTANT SAFETY INFORMATION



Read the following important safety information before using this equipment to avoid serious injury or death and to avoid damage to equipment or property.

WARNING

ELECTRIC SHOCK HAZARD:

- Plug unit into a properly grounded electrical receptacle of the correct voltage, size, and plug configuration. If plug and receptacle do not match, contact a qualified electrician to determine and install the proper voltage and size electrical receptacle.
- Turn OFF power switch, unplug power cord, and allow unit to cool before performing any cleaning, adjustments, or maintenance.
- DO NOT submerge or saturate with water. Unit is not waterproof. Do not operate if unit has been submerged or saturated with water.
- Unit is not weatherproof. Locate unit indoors where ambient air temperature is a minimum of 70°F (21°C) and a maximum of 85°F (29°C).
- Do not steam clean or use excessive water on unit.
- This unit is not “jet-proof” construction. Do not use jet-clean spray to clean this unit.
- Do not pull unit by power cord.
- Discontinue use if power cord is frayed or worn.
- Do not attempt to repair or replace a damaged power cord. Cord must be replaced by Hatco, an Authorized Hatco Service Agent, or a person with similar qualifications.
- Do not clean unit when it is energized or hot.
- Do not allow liquids to spill into the unit.
- This unit must be serviced by qualified personnel only. Service by unqualified personnel may lead to electric shock or burn.
- Use only Genuine Hatco Replacement Parts when service is required. Failure to use Genuine Hatco Replacement Parts will void all warranties and may subject operators of the equipment to hazardous electrical voltage, resulting in electrical shock or burn. Genuine Hatco Replacement Parts are specified to operate safely in the environments in which they are used. Some aftermarket or generic replacement parts do not have the characteristics that will allow them to operate safely in Hatco equipment.

FIRE HAZARD: Locate unit a minimum of 1” (25 mm) from combustible walls and materials. If safe distances are not maintained, discoloration or combustion could occur.

Use only light bulbs that meet or exceed (National Sanitation Foundation (NSF) standards and are specifically designed for food holding areas. Breakage of light bulbs not specially coated could result in personal injury and/or food contamination.

WARNING

Make sure all operators have been instructed on the safe and proper use of the unit.

This unit is not intended for use by children or persons with reduced physical, sensory, or mental capabilities. Ensure proper supervision of children and keep them away from the unit.

Hatco Corporation is not responsible for the actual food product serving temperature. It is the responsibility of the user to ensure that the food product is held and served at a safe temperature.

Make sure food product has been heated to the proper food-safe temperature before placing in unit. Failure to heat food product properly may result in serious health risks. This unit is for holding preheated food product only.

This unit has no “user-serviceable” parts. If service is required on this unit, contact an Authorized Hatco Service Agent or contact the Hatco Service Department at 800-558-0607 or 414-671-6350; fax 800-690-2966; or International fax 414-671-3976.

CAUTION

BURN HAZARD: Some exterior surfaces on the unit will get hot. Use caution when touching these areas.

Locate unit in an area that is convenient for use. The location should be level and strong enough to support the weight of the unit and contents.

Transport unit in upright position only. Failure to do so may result in damage to unit or personal injury.

NOTICE

Do not lay unit on the side with the control panel or damage to the unit could occur.

Use non-abrasive cleaners only. Abrasive cleaners could scratch the finish of the unit, marring its appearance and making it susceptible to soil accumulation.

Clean unit daily to avoid malfunctions and maintain sanitary operation.

This unit is intended for commercial use only — NOT for household use.

MODEL DESCRIPTION

All Models

Mini Display Warmers are powder-coated, painted steel and feature tempered glass side panels. The access door(s) can be hinged left or right and mounted on any side of the unit. Two door units can be configured to allow “pass-through” from either the side or the back of the unit to the service area. The cabinet interior top and bottom are made of easy-to-clean stainless steel. The unit’s dry heat system is suitable for all boxed or wrapped food products as well as unwrapped muffins, turnovers, and desserts.

Three magnetically adjustable shelves for horizontal or slanted displays provide flexibility for a variety of product choices. Shelf height is also adjustable to accommodate a variety of food package sizes. The unit has incandescent lighting to heighten product awareness.

The Hatco Mini Display Warmer keeps food at safe serving temperatures by circulating hot air throughout the entire cabinet. Perfect for convenience stores, restaurants, recreational facilities, theme parks, and anywhere there is limited counter space.

The Mini Display Warmer is available in several *Designer* colors.

NOTE: The hood of the Mini Display Warmer is always black.

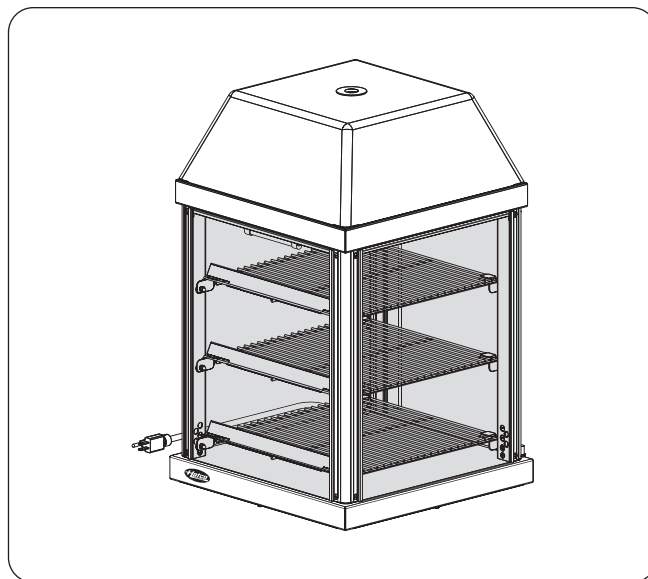


Figure 1. Model MDW-1X

MODEL DESIGNATION

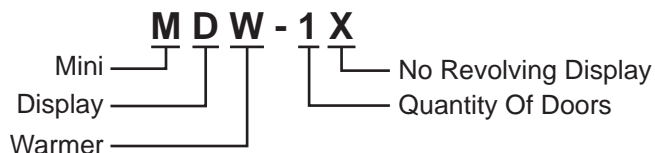


Figure 2. Model Designation

SPECIFICATIONS

Plug Configuration

Units are supplied from the factory with a 6' (1829 mm) electrical cord and plug installed.



ELECTRIC SHOCK HAZARD: Plug unit into a properly grounded electrical receptacle of the correct voltage, size, and plug configuration. If plug and receptacle do not match, contact a qualified electrician to determine and install the proper voltage and size electrical receptacle.

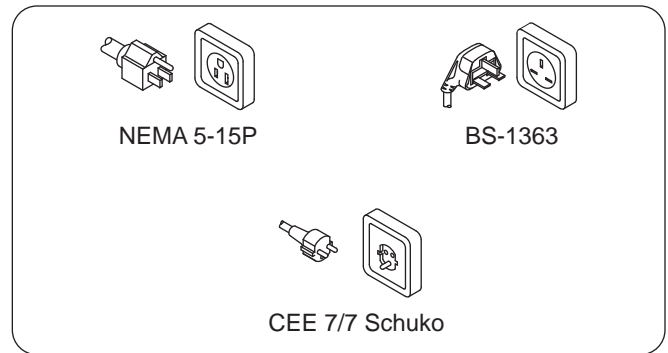


Figure 3. Plug Configuration

NOTE: Receptacle not supplied by Hatco.

Electrical Rating Chart

Model	Voltage	Watts	Amps	Plug Configuration	Shipping Weight
MDX-1X	120	470	3.9	NEMA 5-15P	47 lbs. (21 kg)
	230 (CE)	510	2.2	CEE 7/7 Schuko or BS-1363	47 lbs. (21 kg)
MDW-2X	120	470	3.9	NEMA 5-15P	50 lbs. (23 kg)
	230 (CE)	510	2.2	CEE 7/7 Schuko or BS-1363	50 lbs. (23 kg)

The shaded areas contain electrical information for **International models only**.

Dimensions

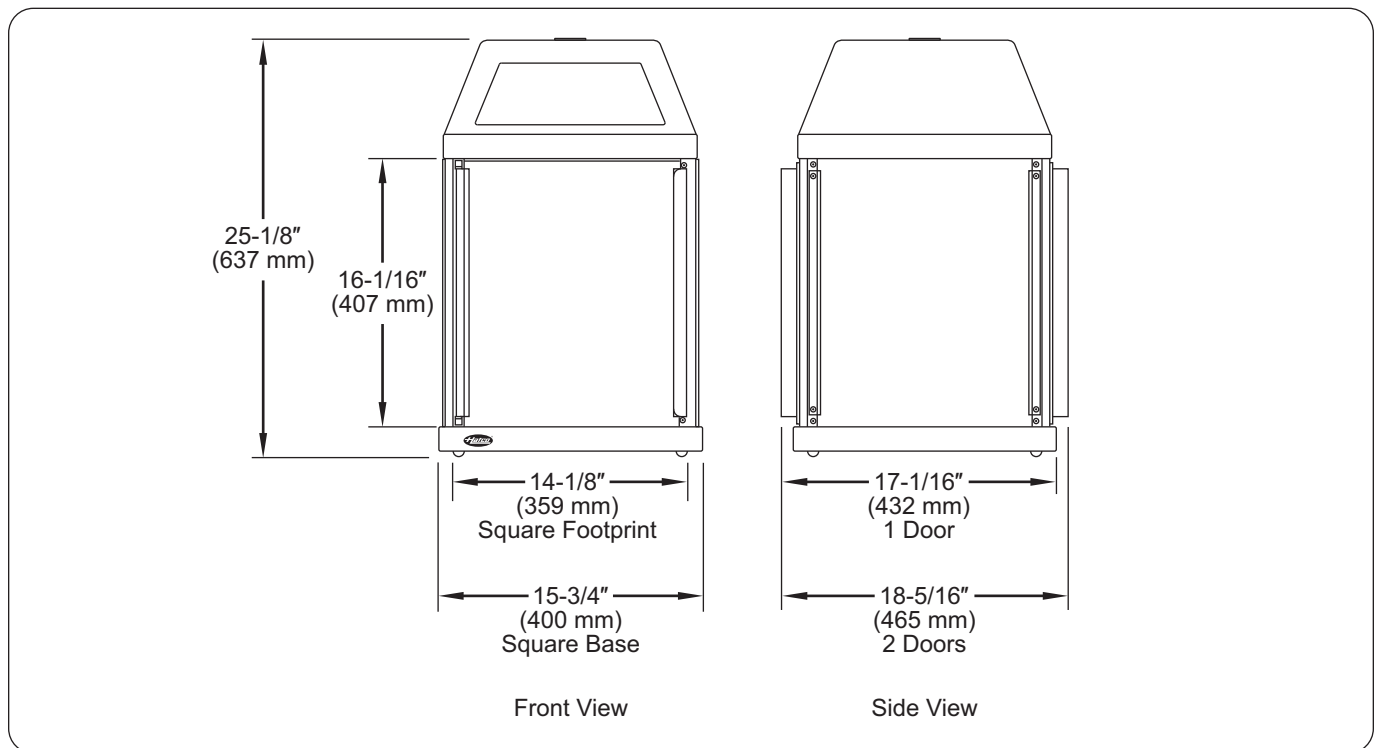


Figure 4. Dimensions

INSTALLATION

General

The Mini Display Warmer is shipped with most components installed and ready for operation. The following installation instructions must be performed before plugging in and operating the unit.

WARNING

ELECTRIC SHOCK HAZARD: Unit is not weatherproof. Locate unit indoors where ambient air temperature is a minimum of 70°F (21°C) and a maximum of 85°F (29°C).

FIRE HAZARD: Locate unit a minimum of 1" (25 mm) from combustible walls and materials. If safe distances are not maintained, discoloration or combustion could occur.

CAUTION

Locate unit in an area that is convenient for use. The location should be level and strong enough to support the weight of the unit and contents.

Transport unit in upright position only. Failure to do so may result in damage to unit or personal injury.

NOTICE

Do not lay unit on the side with the control panel or damage to the unit could occur.

1. Remove the unit from the shipping carton.

NOTE: To prevent delay in obtaining warranty coverage, complete online warranty registration. See the IMPORTANT OWNER INFORMATION section for details.

2. Remove tape and protective packaging from all surfaces of the unit.

- The stainless steel floor in all units is protected during shipping with a sheet of corrugated cardboard. This protection must be removed prior to cabinet operation.
- The shelves have packing material and cardboard attached for protection during shipping. This protection must be removed prior to cabinet operation.

3. Position the magnetic shelves at adequate heights to accommodate product. The shelves may be inserted horizontally or inclined.

NOTE: If the unit is equipped with an optional Hood with Backlit Sign Cutout and the Merchandising Graphic Image has not been installed, see the OPTIONS AND ACCESSORIES section for installation instructions.

NOTE: The unit must be transported in the upright position. If laid on its side, all glass surfaces must be secured with tape.

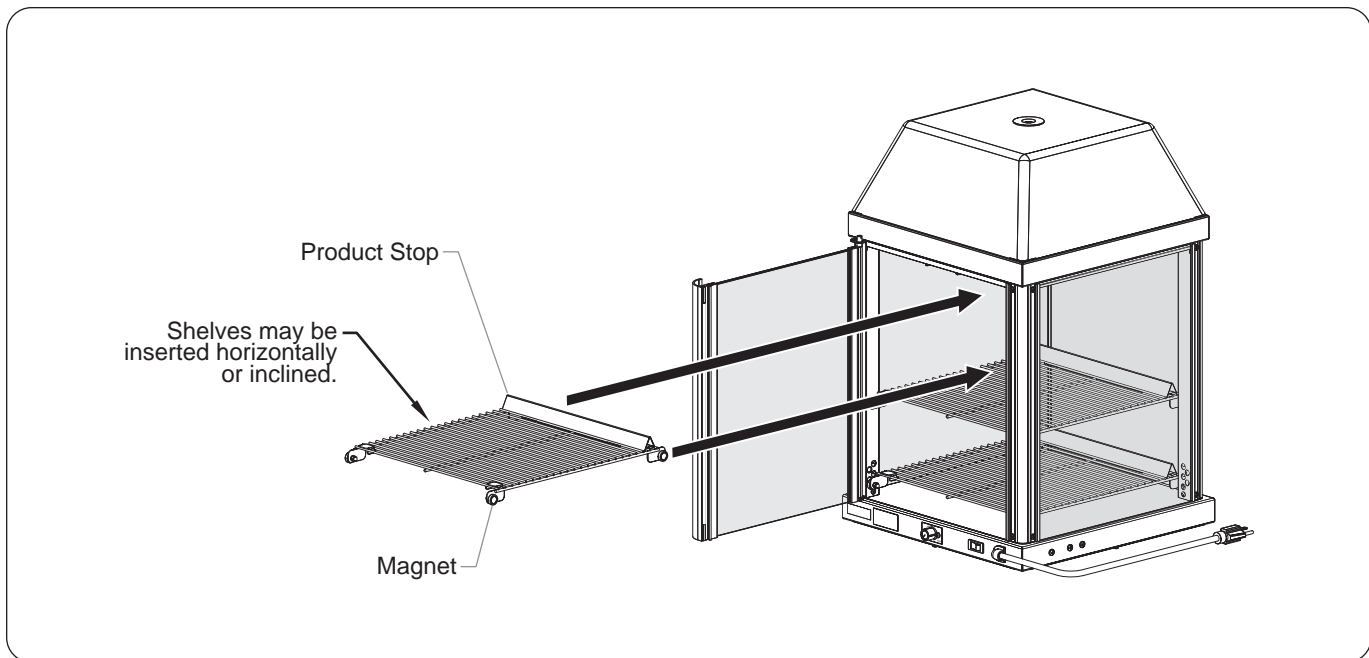


Figure 5. Installing the Shelves

Reversible Access Door

Access door(s) may be hinged on either the left or right side for convenience. Use the following procedure to reverse the access door.

1. Remove the top hinge pin screw that secures the door to the door bracket and save.
2. Carefully lift the door off of the bottom hinge pin. Also remove the nylon washer from the hinge pin and save.
3. Remove the screws holding the door bracket to the unit.
4. Remove the screws holding the glass bracket to the unit.
5. Install the glass bracket on the side of the cabinet where the door bracket was mounted previously.
6. Install the door bracket on the side of the cabinet where the glass bracket was mounted previously.
7. Move the hinge cap on the bottom of the door bracket from what is now the inner hinge pin to the outer hinge pin.
8. Place the nylon washer over the inner hinge pin.
9. Carefully rotate the door 180° and place the door assembly onto the inner hinge pin (make sure the nylon washer is in place).
10. Tip/tilt the door assembly towards the cabinet and align the top of the door with the top hinge. Install the top hinge pin screw through the hinge and into the door. Tighten securely.

Configurable Access Door

A door can be exchanged with any glass panel to suit the installation site.

1. Remove the door assembly and the door bracket.
 - a. Remove the top hinge pin screw that secures the door to the door bracket and save.
 - b. Carefully lift the door off of the bottom hinge pin. Also remove the nylon washer from the hinge pin and save.
 - c. Remove the screws holding the door bracket to unit.
2. Remove the glass panel and the glass bracket.

NOTE: Make sure to remove only the glass bracket that will be replaced with the door bracket (the side that the door hinge will be located on).

- a. While holding the glass panel securely, remove the screws holding the glass bracket to the unit. Keep hardware.
- b. Carefully lift the glass panel off the unit and set in a safe place.
3. Install the door assembly and the door bracket.
 - a. Make sure the hinge cap on the bottom of the door bracket is installed on the outer hinge pin.
 - b. Place the nylon washer over the inner hinge pin.
 - c. Place the door assembly onto the inner hinge pin (make sure the nylon washer is in place).
 - d. Tip/tilt the door assembly towards the cabinet and align the top of the door with the top hinge. Install the top hinge pin screw through the hinge and into the door. Tighten securely.
4. Slide the glass panel into the groove of the installed glass bracket.
5. While holding the glass panel securely, install the remaining glass bracket to the unit to secure the glass panel in place.

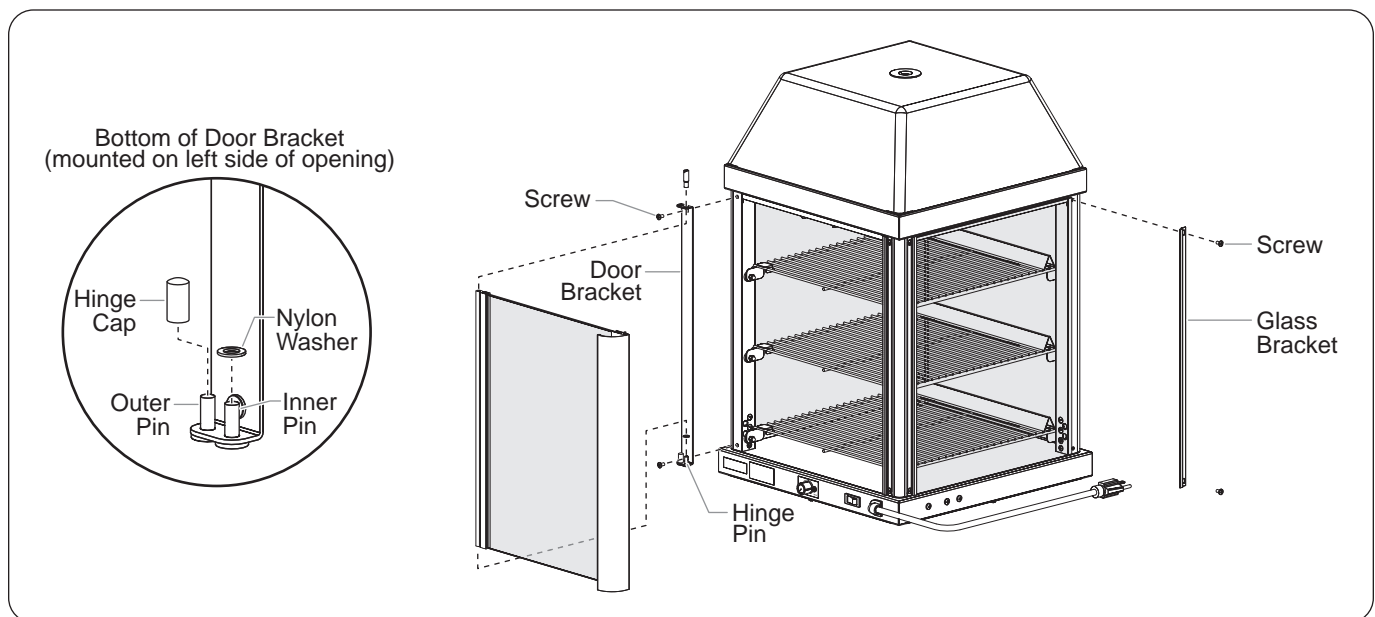


Figure 6. Reversing and Configuring the Access Door

OPERATION

General

Use the following procedure to turn on and operate the Hatco Mini Display Warmer.

WARNING

Read all safety messages in the **IMPORTANT SAFETY INFORMATION** section before operating this equipment.

Startup

1. Plug unit into an electrical receptacle of the correct voltage, size, and plug configuration. See the SPECIFICATIONS section for details.
2. Move the Power On/Off (I/O) switch to the On (I) position.
3. Set the Temperature Control to the desired level between MIN and MAX.

CAUTION

BURN HAZARD: Some exterior surfaces on the unit will get hot. Use caution when touching these areas.

4. Allow 30 minutes to preheat. Check the interior thermometer and adjust the Temperature Control if necessary.

NOTE: Temperature settings may vary depending upon product make-up and consistency. The interior thermometer displays temperature inside the cabinet, not the food product temperature.

Shutdown

1. Move the Power On/Off (I/O) switch to the Off (O) position.
2. Unplug the power cord and allow the unit to cool before performing any cleaning or maintenance.

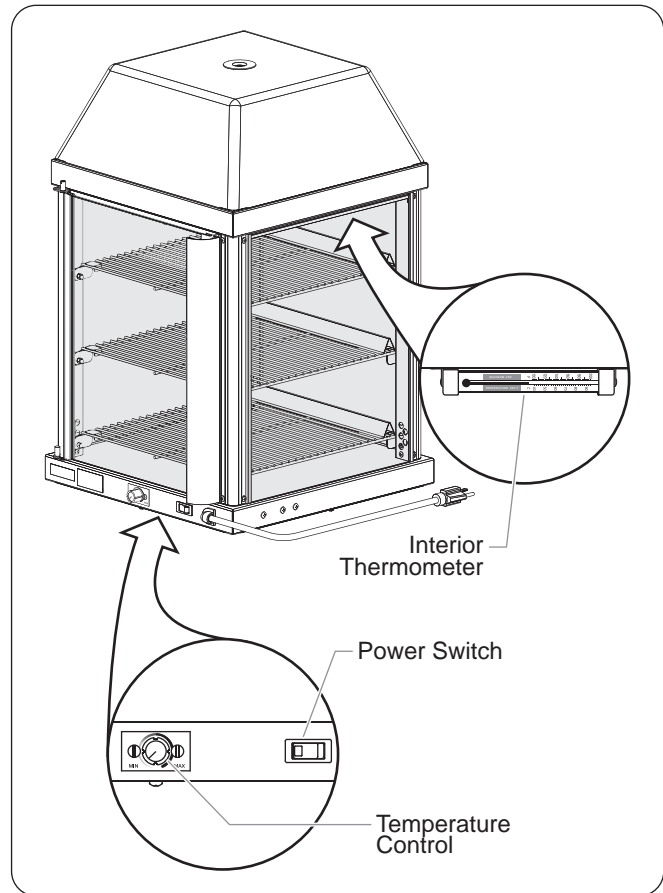


Figure 7. Control Panel

General

The Hatco Mini Display Warmer is designed for maximum durability and performance, with minimum maintenance.



WARNING

ELECTRIC SHOCK HAZARD:

- Turn OFF power switch, unplug power cord, and allow unit to cool before performing any cleaning, adjustments, or maintenance.
- DO NOT submerge or saturate with water. Unit is not waterproof. Do not operate if unit has been submerged or saturated with water.
- Do not steam clean or use excessive water on unit.
- This unit is not “jet-proof” construction. Do not use jet-clean spray to clean this unit.
- Do not clean unit when it is energized or hot.

This unit has no “user-serviceable” parts. If service is required on this unit, contact an Authorized Hatco Service Agent or contact the Hatco Service Department at 800-558-0607 or 414-671-6350; fax 800-690-2966; or International fax 414-671-3976.

Cleaning

To preserve the finish of the Mini Display Warmer, perform the following cleaning procedure daily.

NOTICE

Use non-abrasive cleaners only. Abrasive cleaners could scratch the finish of the unit, marring its appearance and making it susceptible to soil accumulation.

1. Turn off the unit, unplug the power cord, and allow the unit to cool.
2. Remove and wash all food pans.
3. Wipe down all interior and exterior metal surfaces with a damp cloth. Stubborn stains may be removed with a good non-abrasive cleaner. Clean hard to reach areas using a small brush and mild soap.
4. Clean the glass side panels and door panel(s) using ordinary glass cleaner and a damp, soft cloth or paper towel. The side panels are removable for detailed cleaning, if necessary. Refer to the “Removing a Glass Panel” procedure in this section for removal.

Removing a Glass Panel

1. While holding the glass panel securely, remove the screws holding one of the glass brackets to the unit.
2. Carefully lift the glass panel off the unit and set in a safe place with the screws.

Installing a Glass Panel

1. Slide the glass panel into the groove of the installed glass bracket.
2. While holding the glass panel securely, reinstall the removed glass bracket to the unit.

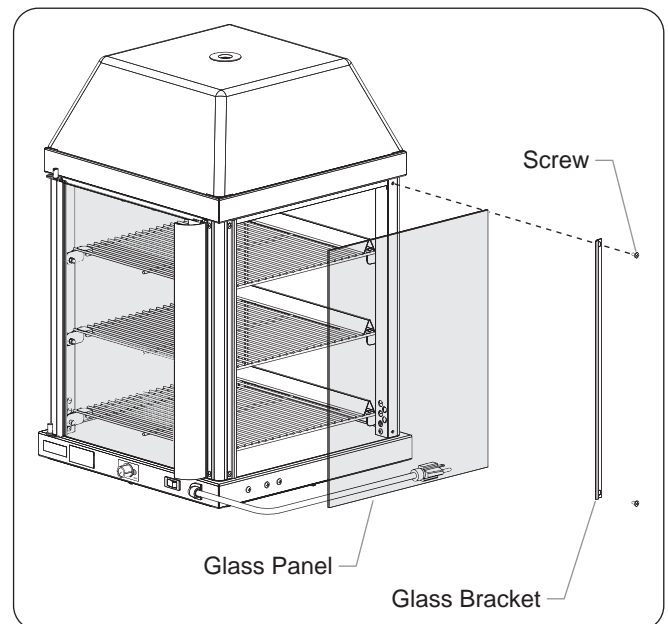


Figure 8. Glass Panel Removal

MAINTENANCE

Display Light Bulb Replacement

The display light is an incandescent bulb that illuminates the warming area. This bulb has a special coating to guard against injury and food contamination in the event of breakage.



Use only light bulbs that meet or exceed (National Sanitation Foundation (NSF) standards and are specifically designed for food holding areas. Breakage of light bulbs not specially coated could result in personal injury and/or food contamination.

Use only Genuine Hatco Replacement Parts when service is required. Failure to use Genuine Hatco Replacement Parts will void all warranties and may subject operators of the equipment to hazardous electrical voltage, resulting in electrical shock or burn. Genuine Hatco Replacement Parts are specified to operate safely in the environments in which they are used. Some aftermarket or generic replacement parts do not have the characteristics that will allow them to operate safely in Hatco equipment.

1. Disconnect the power supply and wait until the unit has cooled.
2. Unscrew and remove the threaded cap from the hood.
3. Remove the hood from the cabinet.
4. Remove one of the hood filler panels. (Two screws need to be removed to remove a hood filler panel.)
5. Unscrew the bulb from the unit and replace it with a new, specially-coated incandescent bulb (display light bulbs have a threaded base).

NOTE: Hatco shatter-resistant bulbs meet NSF standards for food holding and display areas. For 120 volt applications, use Hatco P/N 02.30.043.00. For 230 volt applications use Hatco P/N 02.30.058.00.

6. Reinstall the hood filler panel.
7. Securely place the hood back onto the cabinet.
8. Reinstall the threaded cap to secure the hood.

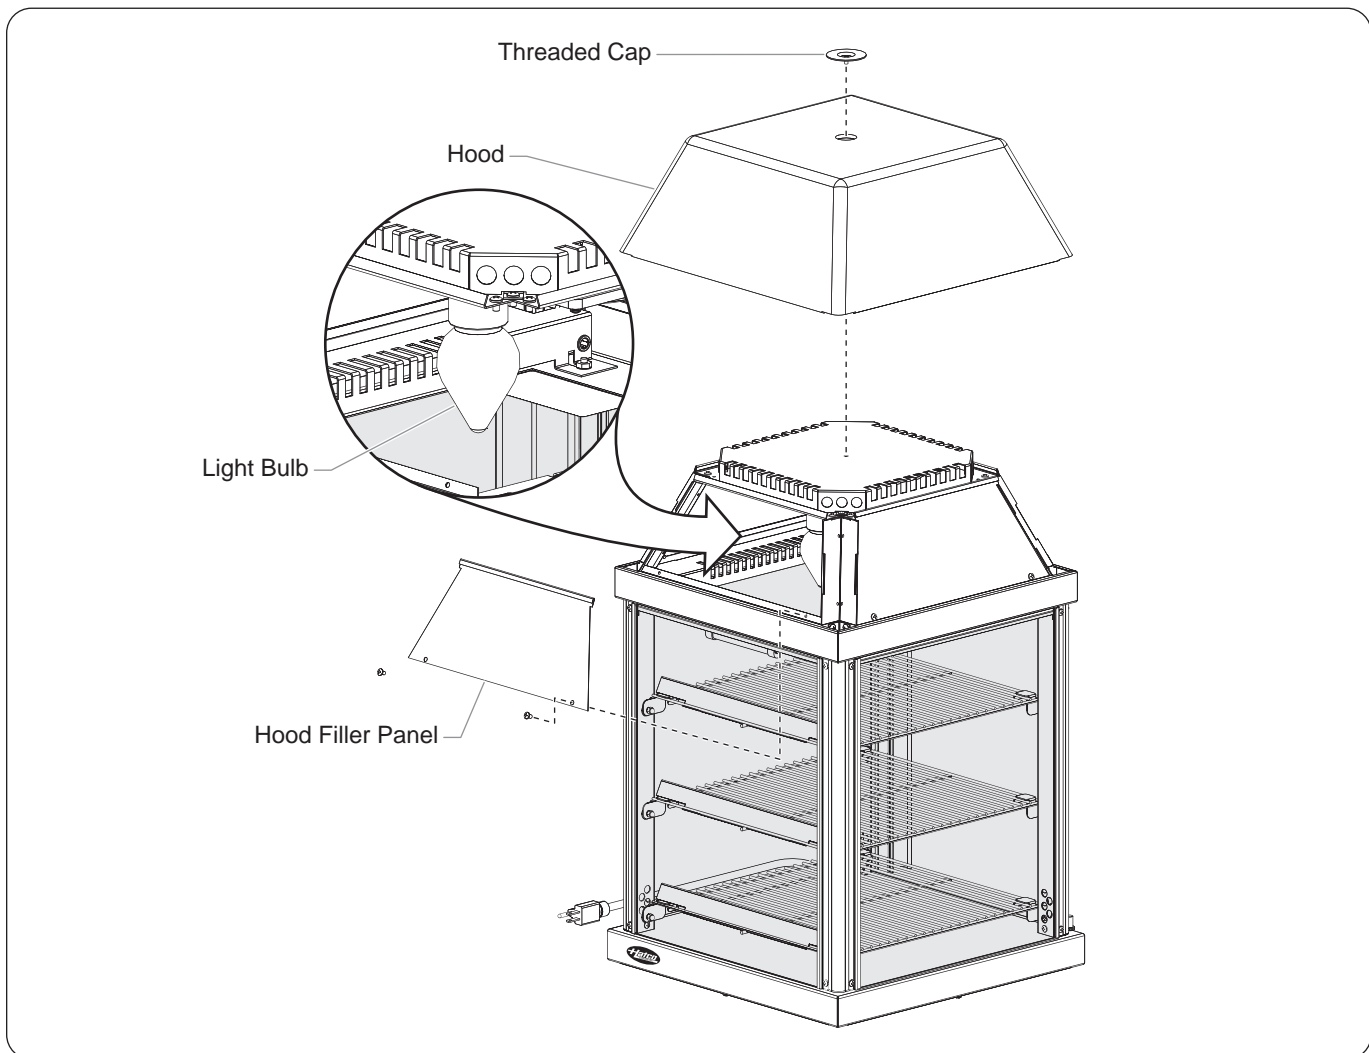


Figure 9. Bulb Replacement

TROUBLESHOOTING GUIDE



WARNING

This unit must be serviced by qualified personnel only. Service by unqualified personnel may lead to electric shock or burn.



WARNING

ELECTRIC SHOCK HAZARD: Turn OFF power switch, unplug power cord, and allow unit to cool before performing any cleaning, adjustments, or maintenance.

Symptom	Probable Cause	Corrective Action
Light bulb not working.	Light bulb defective.	Replace light bulb. Refer to the MAINTENANCE section.
	Unit not turned on.	Move Power On/Off (I/O) switch to the On (I) position.
Unit too hot.	Temperature Control set too high.	Adjust the Temperature Control to a lower setting.
	Unit connected to incorrect power supply.	Verify with qualified personnel that power supply matches unit specification.
	Temperature Control is defective.	Contact an Authorized Hatco Service Agent or Hatco for assistance.
No heat, but light works.	Temperature Control set too low.	Adjust Temperature Control to a higher setting.
	Heating element(s) not working.	Contact an Authorized Hatco Service Agent or Hatco for assistance.
	Temperature Control is defective.	Contact an Authorized Hatco Service Agent or Hatco for assistance.
Unit not hot enough.	Unit not allowed enough time to preheat.	Allow unit 30 minutes to reach operating temperature.
	Temperature Control set too low.	Adjust the Temperature Control to a higher setting.
	Door(s) not closed completely.	Make sure all doors are closed completely.
	Air circulating fan not working properly.	Contact an Authorized Hatco Service Agent or Hatco for assistance.
	Heating element(s) not working.	Contact an Authorized Hatco Service Agent or Hatco for assistance.
	Temperature Control is defective.	Contact an Authorized Hatco Service Agent or Hatco for assistance.
Unit not working at all.	Unit not plugged in.	Plug unit into proper power supply.
	Unit not turned on.	Move Power On/Off (I/O) switch to the On (I) position.
	Circuit breaker tripped.	Reset circuit breaker. If circuit breaker continues to trip, contact an Authorized Hatco Service Agent or Hatco for assistance.
	Power On/Off (I/O) switch defective.	Contact an Authorized Hatco Service Agent or Hatco for assistance.

OPTIONS AND ACCESSORIES

Hood with Backlit Sign Cutout

An optional hood with a backlit sign cutout is available for all models. The hood and sign can be rotated to face any side of the unit.

Installing a Graphic Image

Use the following procedure to apply a graphic image to the graphic panel for placement in the hood of the unit.

1. Disconnect the power supply and allow the unit to cool.
2. Unscrew and remove the threaded cap from the hood.
3. Remove the hood.
4. Remove the graphic panel from the hood frame.
5. Apply the graphic image:
 - If the graphic image is a decal, peel off the backing paper from the graphic decal and apply the decal to the graphic panel.
 - If the graphic image is non-adhesive, trim the image to the shape of the graphic panel leaving no more than an 1/8" (3 mm) gap between the image and the edge of the panel. Then, tape the image to the inside face of the graphic panel. Make sure to tape around the entire edge of the image so that it does not hang loose.
6. Install the graphic panel with the tabs on the panel resting in the corner notches of the hood frame.
7. Securely place the hood back onto the cabinet. Make sure the cutout in the hood is over the graphic panel.
8. Reinstall the threaded cap to secure the hood to the unit.

Relocating the Graphic Panel

Use the following procedure to change the location of the backlit sign on the unit.

1. Disconnect the power supply and allow the unit to cool.
2. Unscrew and remove the threaded cap from the hood.
3. Remove the hood.
4. Remove the graphic panel from its existing location in the hood frame.
5. Remove the hood filler panel from the side where the graphic panel needs to be installed. (Two screws need to be removed to remove the hood filler panel.)
6. Install the hood filler panel onto the side where the graphic panel was originally located. Make sure the top lip of the hood filler panel fits over the edge of the hood frame and the two screws are installed.
7. Install the graphic panel into the new position with the tabs on the graphic panel resting in the corner notches of the hood frame.
8. Securely place the hood back onto the cabinet. Make sure the cutout in the hood is over the graphic panel.
9. Reinstall the threaded cap to secure the hood.

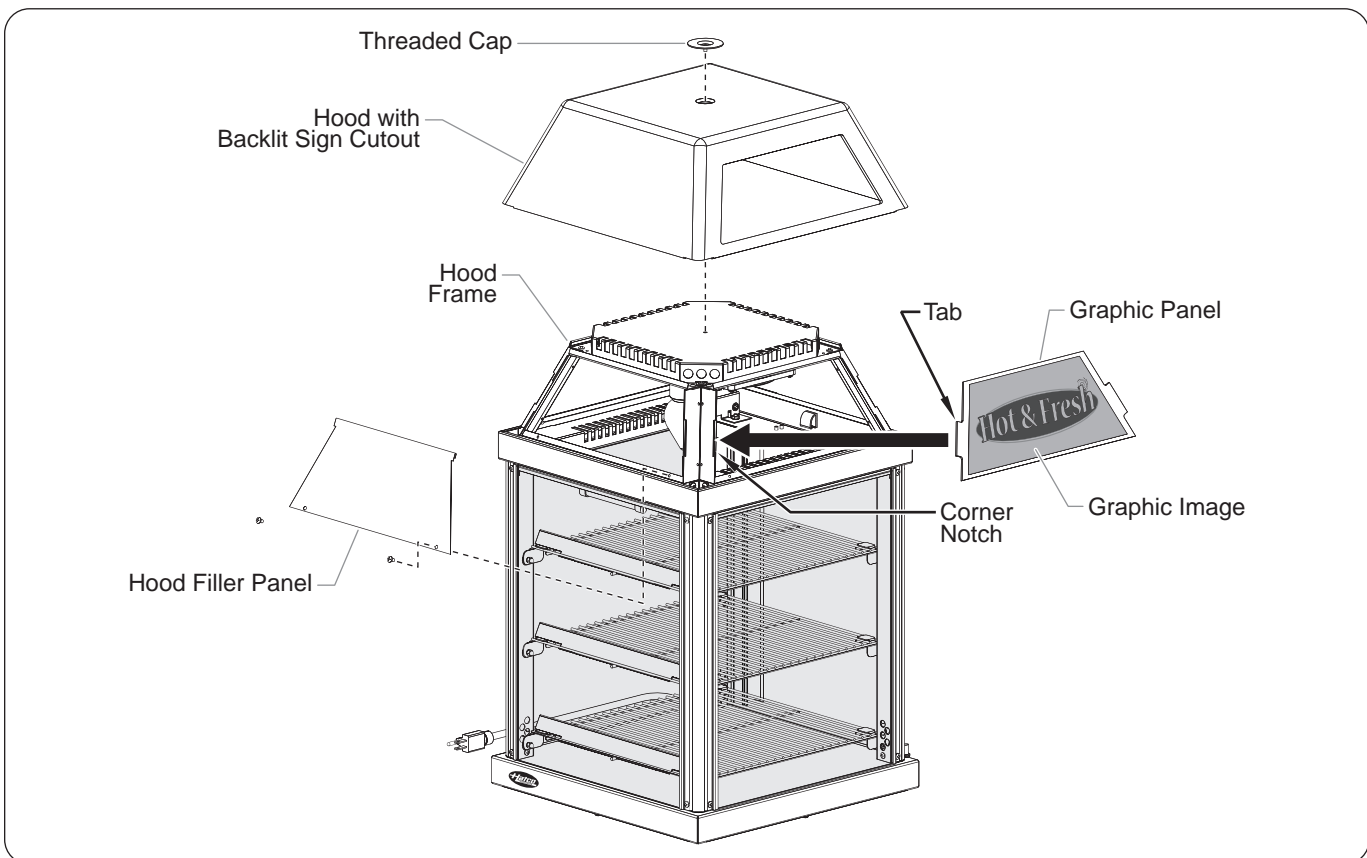


Figure 10. Hood with Backlit Sign Cutout

1. PRODUCT WARRANTY

Hatco warrants the products that it manufactures (the "Products") to be free from defects in materials and workmanship, under normal use and service, for a period of one (1) year from the date of purchase when installed and maintained in accordance with Hatco's written instructions or 18 months from the date of shipment from Hatco. Buyer must establish the Product's purchase date by returning Hatco's Warranty Registration Card or by other means satisfactory to Hatco in its sole discretion.

Hatco warrants the following Product components to be free from defects in materials and workmanship from the date of purchase (subject to the foregoing conditions) for the period(s) of time and on the conditions listed below:

- a) **One (1) Year Parts and Labor PLUS One (1) Additional Year Parts-Only Warranty:**
 - Conveyor Toaster Elements (metal sheathed)
 - Drawer Warmer Elements (metal sheathed)
 - Drawer Warmer Drawer Rollers and Slides
 - Food Warmer Elements (metal sheathed)
 - Display Warmer Elements (metal sheathed air heating)
 - Holding Cabinet Elements (metal sheathed air heating)
 - Built-In Heated Well Elements — HWB, HWBI, and HWBI-S Series (metal sheathed)

- b) **One (1) Year Parts and Labor PLUS Four (4) Years Parts-Only Warranty on pro-rated terms that Hatco will explain at Buyer's request:**
 - 3CS and FR Tanks

- c) **One (1) Year Parts and Labor PLUS Nine (9) Years Parts-Only Warranty on:**
 - Electric Booster Heater Tanks
 - Gas Booster Heater Tanks

- d) **Ninety (90) Day Parts-Only Warranty:**
 - Replacement Parts

THE FOREGOING WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR PATENT OR OTHER INTELLECTUAL PROPERTY RIGHT INFRINGEMENT. Without limiting the generality of the foregoing, SUCH WARRANTIES DO NOT COVER: Coated incandescent light bulbs, fluorescent lights, heat lamp bulbs, coated halogen light bulbs, halogen heat lamp bulbs, xenon light bulbs, glass components, and fuses; Product failure in booster tank, fin tube heat exchanger, or other water heating equipment caused by liming, sediment buildup, chemical attack, or freezing; or Product misuse, tampering or misapplication, improper installation, or application of improper voltage.

2. LIMITATION OF REMEDIES AND DAMAGES

Hatco's liability and Buyer's exclusive remedy hereunder will be limited solely, at Hatco's option, to repair or replacement using new or refurbished parts or Product by Hatco or a Hatco-authorized service agency (other than where Buyer is located outside of the United States, Canada, United Kingdom, or Australia, in which case Hatco's liability and Buyer's exclusive remedy hereunder will be limited solely to replacement of part under warranty) with respect to any claim made within the applicable warranty period referred to above. Hatco reserves the right to accept or reject any such claim in whole or in part. In the context of this Limited Warranty, "refurbished" means a part or Product that has been returned to its original specifications by Hatco or a Hatco-authorized service agency. Hatco will not accept the return of any Product without prior written approval from Hatco, and all such approved returns shall be made at Buyer's sole expense. HATCO WILL NOT BE LIABLE, UNDER ANY CIRCUMSTANCES, FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, INCLUDING BUT NOT LIMITED TO LABOR COSTS OR LOST PROFITS RESULTING FROM THE USE OF OR INABILITY TO USE THE PRODUCTS OR FROM THE PRODUCTS BEING INCORPORATED IN OR BECOMING A COMPONENT OF ANY OTHER PRODUCT OR GOODS.

NOTES



HATCO AUTHORIZED PARTS DISTRIBUTORS

ALABAMA

Jones McLeod Appl. Svc.
Birmingham 205-251-0159

ARIZONA

Service Solutions Group
Phoenix 602-234-2443

Byassee Equipment Co.
Phoenix 602-252-0402

CALIFORNIA

Industrial Electric
Commercial Parts & Service, Inc.
Huntington Beach 714-379-7100

Chapman Appl. Service
San Diego 619-298-7106

P & D Appliance
Commercial Parts & Service, Inc.
S. San Francisco 650-635-1900

COLORADO

Hawkins Commercial Appliance
Englewood 303-781-5548

FLORIDA

Whaley Foodservice Repair
Jacksonville 904-725-7800

3Wire Nass Service Co., Inc.
Orlando 407-425-2681

B.G.S.I.
Pompano Beach 954-971-0456

Comm. Appliance Service
Tampa 813-663-0313

GEORGIA

TWC Services
Mableton 770-438-9797

Heritage Service Group
Norcross 866-388-9837

Southeastern Rest. Svc.
Norcross 770-446-6177

HAWAII

Burney's Comm. Service, Inc.
Honolulu 808-848-1466

Food Equip Parts & Service
Honolulu 808-847-4871

ILLINOIS

Parts Town
Lombard 708-865-7278

Eichenauer Elec. Service
Decatur 217-429-4229

Midwest Elec. Appl. Service
Elmhurst 630-279-8000

Cone's Repair Service
Moline 309-797-5323

INDIANA

GCS Service
Indianapolis 317-545-9655

IOWA

Electric Motor Service Co.
Davenport 319-323-1823

Goodwin Tucker Group
Des Moines 515-262-9308

KENTUCKY

Service Solutions Group
Lexington 859-254-8854

Service Solutions Group
Louisville 502-451-5411

LOUISIANA

Chandlers Parts & Service
Baton Rouge 225-272-6620

MARYLAND

Electric Motor Service
Baltimore 410-467-8080

GCS Service
Silver Spring 301-585-7550

MASSACHUSETTS

Ace Service Co., Inc.
Needham 781-449-4220

MICHIGAN

Bildons Appliance Service
Detroit 248-478-3320

Commercial Kitchen Service
Bay City 517-893-4561

Midwest Food Equip. Service
Grandville 616-261-2000

MINNESOTA

GCS Service
Plymouth 800-345-4221

MISSOURI

General Parts
Kansas City 816-421-5400

Commercial Kitchen Services
St. Louis 314-890-0700

Kaemmerlen Parts & Service
St. Louis 314-535-2222

NEBRASKA

Anderson Electric
Omaha 402-341-1414

NEVADA

Burney's Commercial
Las Vegas 702-736-0006

Hi. Tech Commercial Service
N. Las Vegas 702-649-4616

NEW JERSEY

Jay Hill Repair
Fairfield 973-575-9145

Service Plus
Flanders 973-691-6300

NEW YORK

Acme American Repairs, Inc.
Brooklyn 718-456-6544

Alpro Service Co.
Brooklyn 718-386-2515

Appliance Installation
Buffalo 716-884-7425

Duffy's Equipment Services, Inc.
Buffalo 800-836-1014

3Wire Northern
Plattsburgh 800-634-5005

Duffy's Equipment Services, Inc.
Sauquoit 800-836-1014

J.B. Brady, Inc.
Syracuse 315-422-9271

NORTH CAROLINA

Authorized Appliance
Charlotte 704-377-4501

OHIO

Akron/Canton Comm. Svc. Inc.
Akron 330-753-6635

Service Solutions Group
Cincinnati 513-772-6600

Commercial Parts and Service
Columbus 614-221-0057

Electrical Appl. Repair Service
Brooklyn Heights 216-459-8700

E. A. Wichman Co.
Toledo 419-385-9121

OKLAHOMA

Hagar Rest. Service, Inc.
Oklahoma City 405-235-2184

Krueger, Inc.
Oklahoma City 405-528-8883

OREGON

Ron's Service, Inc.
Portland 503-624-0890

PENNSYLVANIA

Elmer Schultz Services
Philadelphia 215-627-5401

FAST Comm. Appl. Service
Philadelphia 215-288-4800

Appliance Installation & Service
Pittsburgh 412-809-0244

K & D Service Co.
Harrisburg 717-236-9039

Electric Repair Co.
Reading 610-376-5444

RHODE ISLAND

Marshall Electric Co.
Providence 401-331-1163

SOUTH CAROLINA

Whaley Foodservice Repair
W. Columbia 803-791-4420

TENNESSEE

Camp Electric
Memphis 901-527-7543

TEXAS

GCS Service
Fort Worth 800-433-1804

Armstrong Repair Service
Houston 713-666-7100

Cooking Equipment Specialist
Mesquite 888-866-9276

Refrigerated Specialist, Inc.
Mesquite 888-866-9276

Commercial Kitchen Repair Co.
San Antonio 210-735-2811

UTAH

La Monica's Rest. Equip. Service
Murray 801-263-3221

VIRGINIA

Daubers
Norfolk 757-855-4097

Daubers
Springfield 703-866-3600

WASHINGTON

3Wire Restaurant Appliance
Seattle 800-207-3146

WISCONSIN

A.S.C., Inc.
Madison 608-246-3160

A.S.C., Inc.
Milwaukee 414-543-6460

CANADA

ALBERTA

Key Food Equipment Service
Edmonton 780-438-1690

BRITISH COLUMBIA

Key Food Equipment Service
Vancouver 604-433-4484

Key Food Equipment Service
Victoria 250-920-4888

MANITOBA

Air Rite, Inc.
Winnipeg 204-895-2300

NEW BRUNSWICK

EMR Services, Ltd.
Moncton 506-855-4228

ONTARIO

R.G. Henderson Ltd.
Toronto 416-422-5580

Choquette - CKS, Inc.
Ottawa 613-739-8458

QUÉBEC

Choquette - CKS, Inc.
Montreal 514-722-2000

Choquette - CKS, Inc.
Québec City 418-681-3944

UNITED KINGDOM

Marren Group
Northants +44(0)1933 666233

HATCO CORPORATION
P.O. Box 340500
Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 (414) 671-6350
Parts and Service Fax (800) 690-2966
International Fax (414) 671-3976
partsandservice@hatcocorp.com
www.hatcocorp.com

Register your unit online!
See IMPORTANT OWNER INFORMATION
section for details.